




WIT-COLOR

# Eco-Solvent Printer Ultra i3200 2402s

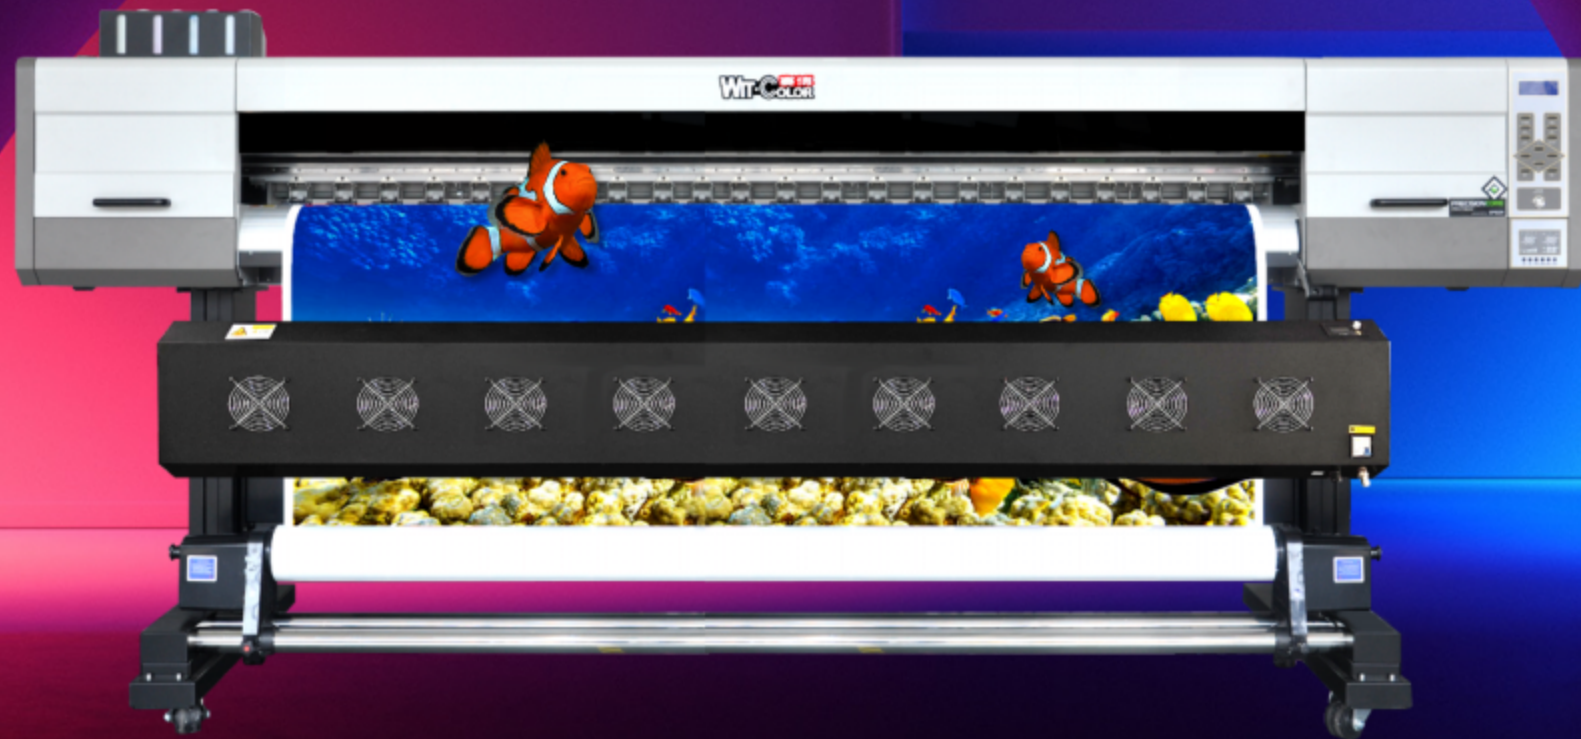

# WIT-COLOR ECO-SOLVENT PRINTER-2402

WIT-COLOR  
Digital

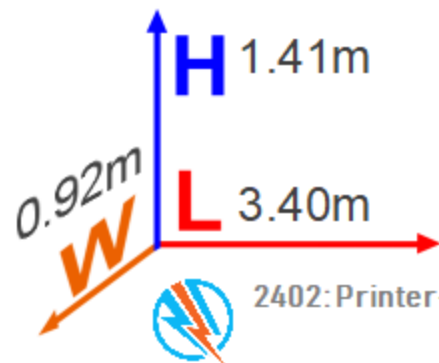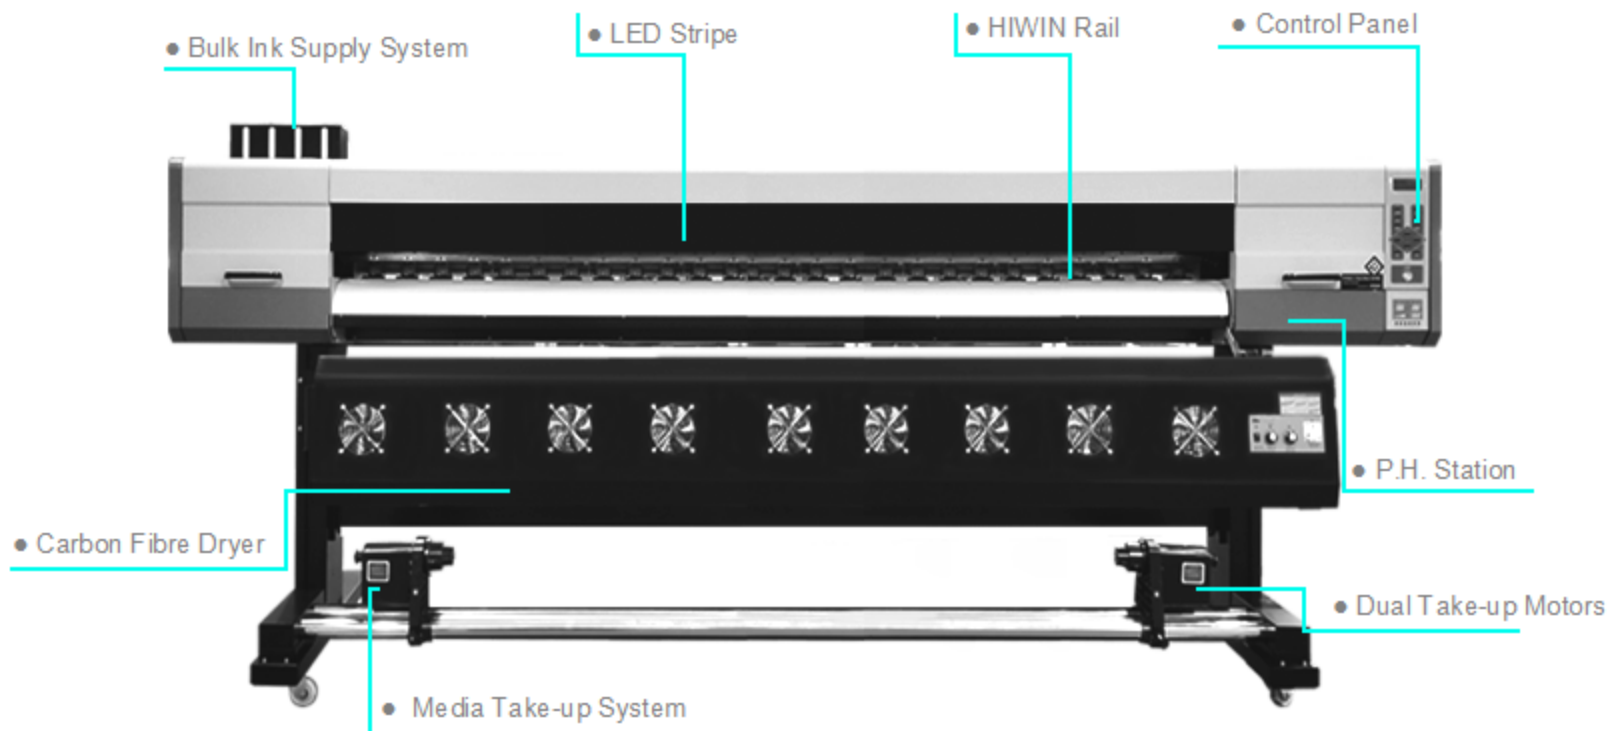

2402: Printer-950W+Dryer-7000W





\*Above information is for reference only, the exact configurations are subject to the order contract.


## Diagram of 1.7m+1.9m Printers' Media Feeding System




Wit-Color Eco-Solvent Ink

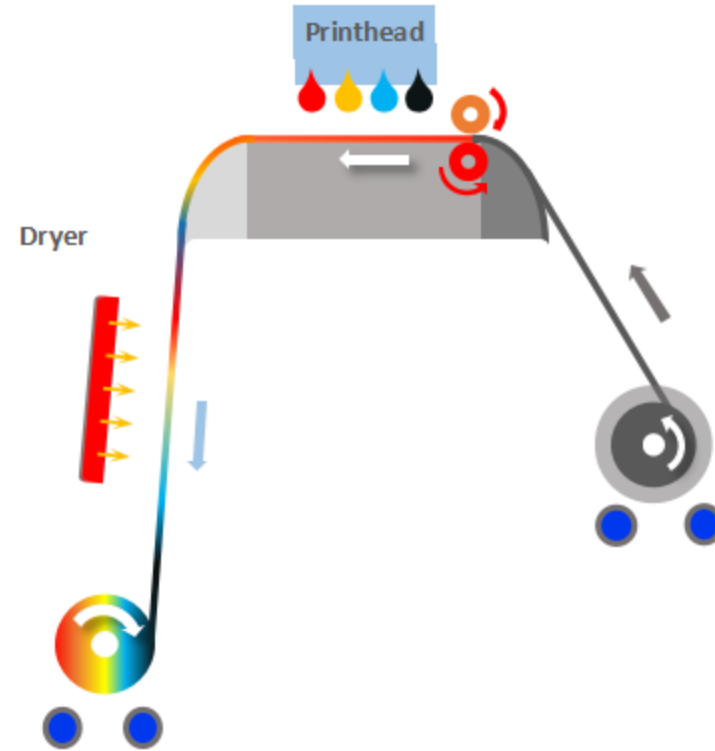

Draft Mode	H2 3PASS-64 m <sup>2</sup> /h
Standard Mode	H2 4PASS-48 m <sup>2</sup> /h
Fine Mode	H2 6PASS-32 m <sup>2</sup> /h

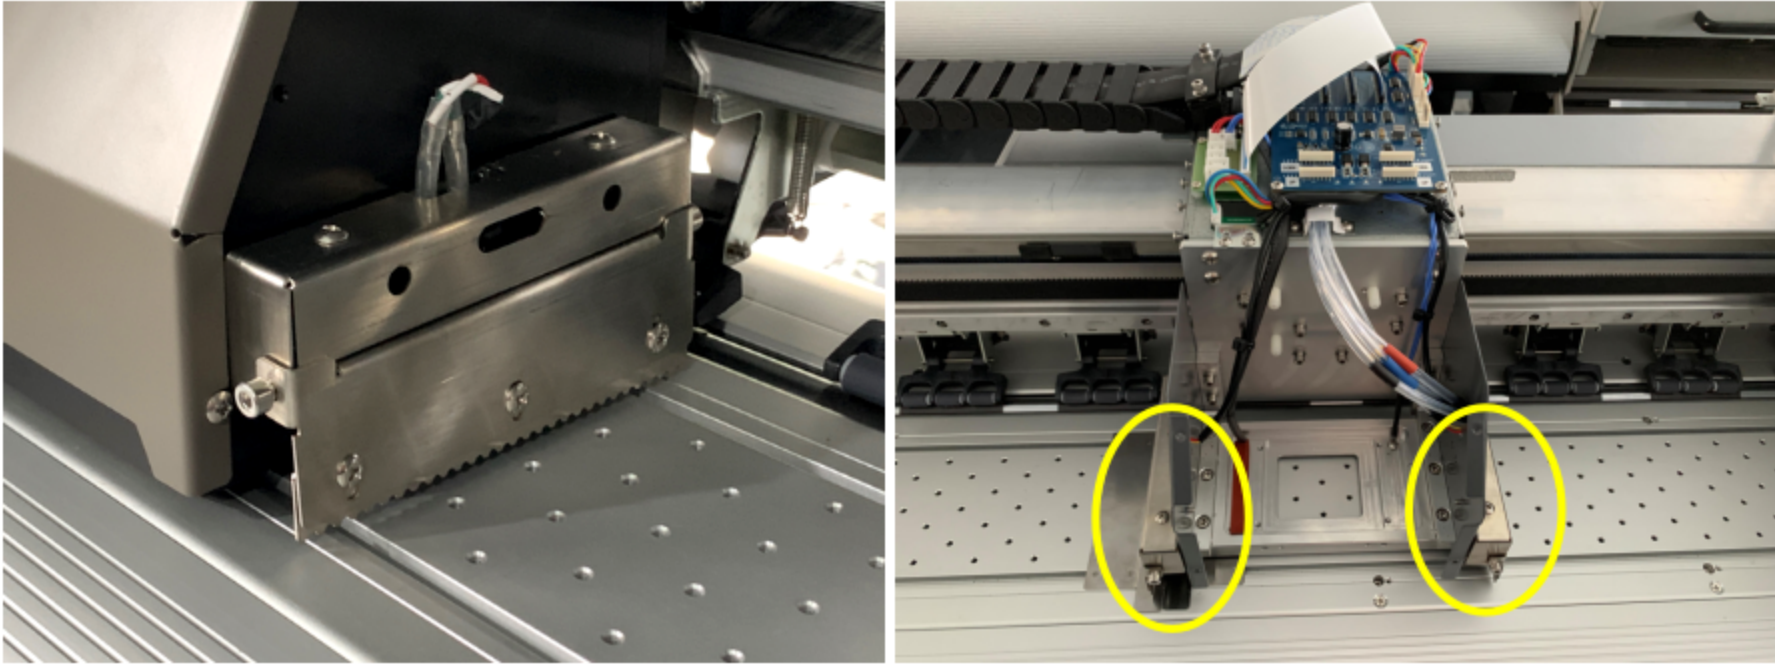


- 360 Degree Anti-collision Switches

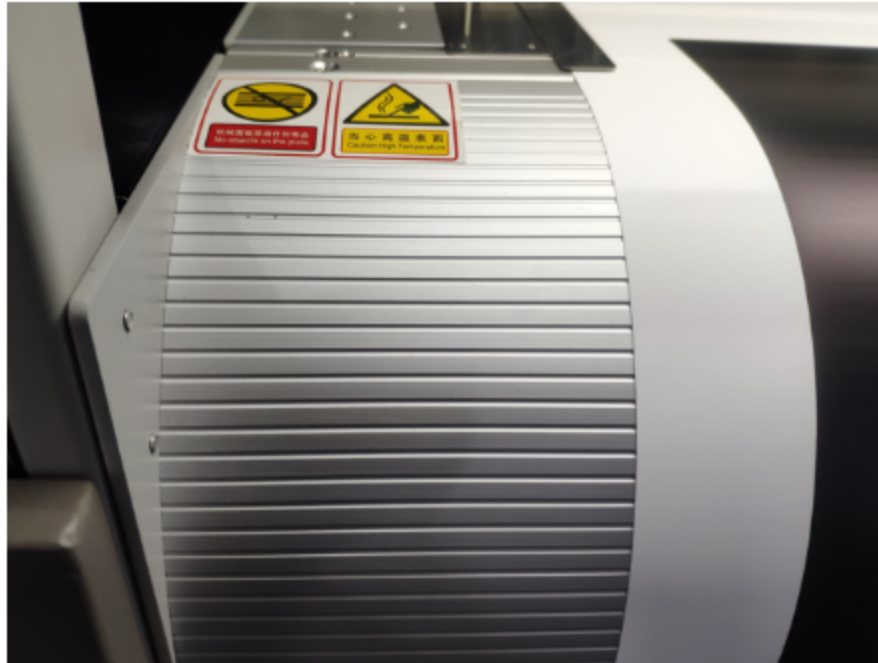


● Aluminium Printing Panel with Built-in Heaters



● High Precision Media Feeding Shaft

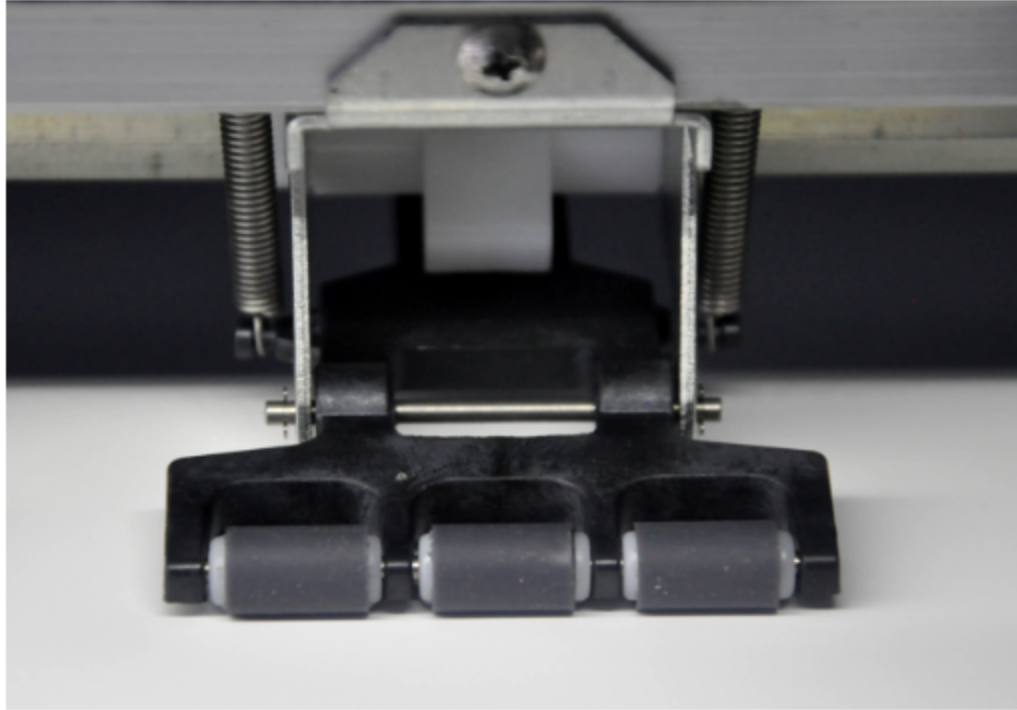


• 3 in 1 Rubber Media Pressing Rollers

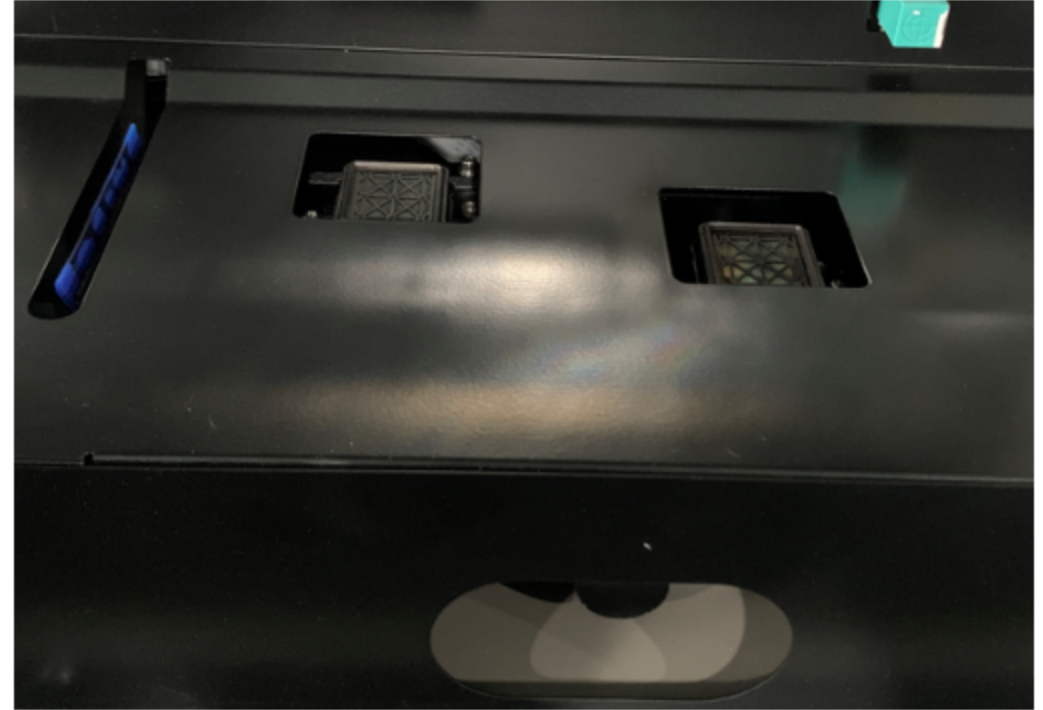

• High Precision P.H. Maintenance Station




● Bulk Ink Supply System (Optional) + Disc Type Filters

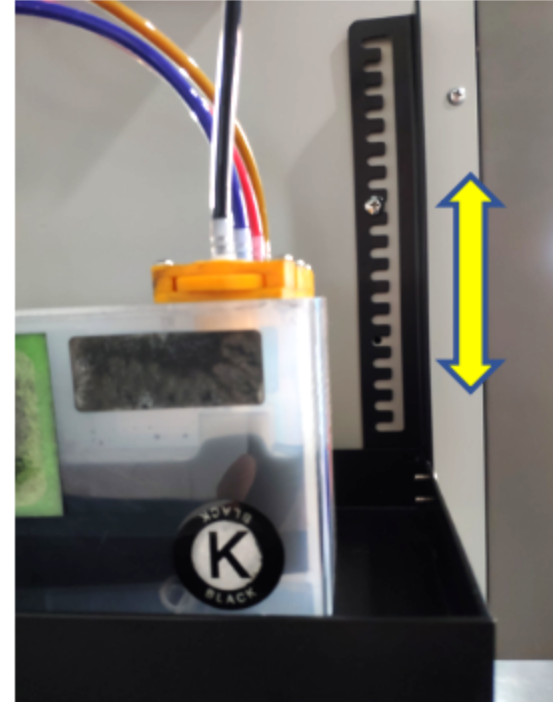

● Liftable Ink Cartridges

## ★ Features

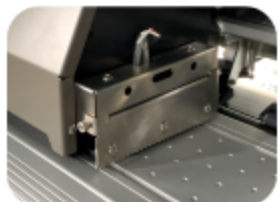

### Carriage Anti-collision System

Micro-switch carriage anti-collision system secured the printhead while it was activated by any obstacles on printing panel.



### High Precision Media Feeding System

Rubber pinch roller for high precision media feeding and high quality printing.



### Variable Dot Printing Technology

Full color variable dot printing technology makes color gamut much wider.



### ICC Profiles

Professional ICC Profiles for different solutions with Wit-Color original ink.



### One Year Warranty

The Standard warranty period is one year. Extended warranty available according to specific conditions.

- ❖ High quality printing meets high end customers' needs.
- ❖ 2.3m printing width is more friendly to world wide special size demands.



## ★ Specifications

Model No.	Ultra i3200 2402s	
Printhead	2 x EPSON i3200 E1	
Resolution	2400 dpi Max.	
Ink Color	CMYK	
Media	Width	Less than 230 cm
	Type	PVC, Banner, Flex, Vinyl, Artificial Leather, etc.
Speed	3 Pass 60 sqm/h 4 Pass 40 sqm/h 6 Pass 30 sqm/h	
Ink Type	Eco-solvent Ink	
Ink Dropsize	1.5-21 pl Variable	
Cleaning	Automatic Cleaning, Anti-Clogging Flush Function & Capping System	
Feeding & Take-up System	Automatic Media Feeding & Take-up Systems	
Environment	Temperature 20-28°C, Humidity: 40-60%	
RIP Software	Maintop / Photoprint	
Interface	USB 3.0	
Power	50/60 HZ, 220V	
Packing	3.60x0.70x1.10m G.W.:480 kg N.W.:400 KG	

\*Above Specifications are subject to change without notice.