


## Features and Benefits

- Light source: COB LED
- Long LED life: More than 50,000 hours
- Low heat, less than 60°C
- No UV or IR light radiation
- No mercury or other inorganic
- Homogeneous flood illumination
- Machined aluminum heat fins with excellent thermal efficiencies
- The LED down light is available in the following white color temperatures:  
2700/3000/4000/5000/6000K
- 3 years limited warranty
- Works with worldwide lighting systems  
AC220/240V



## Typical Applications

- Spot lighting
- Retail Store lighting
- Commercial lighting
- Residential lighting
- General lighting
- Energy Saving Programs
- Sustainable Energy

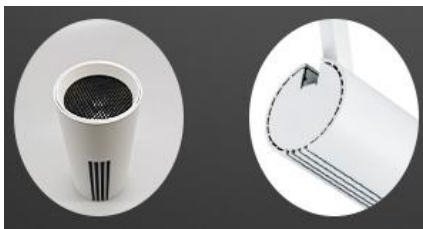

## Anti-glare Honeycomb Available



## PRODUCT SPECIFICATIONS

<b>LAMP TYPE</b>	Track light series(surface-mounted version available)
<b>LIGHT SOURCE</b>	Cree or Epistar COB LED. OSRAM/Bridgelux is also optional
<b>Power</b>	15/20/25/30/35/40/45W
<b>BEAM ANGLE</b>	15°/24°/38°±3°
<b>RENDERING INDEX (Ra)</b>	>80Ra or 90Ra
<b>Color Temperature</b>	2700/3000/4000/5000K(Cree); 3000/4000/6000K(Epistar)
<b>Efficiency</b>	85-90lm/w±10% for non-dimmable model; 80-85lm/w±10% for dimmable model
<b>OPTICS</b>	Aluminum coating reflector
<b>HEATSINK</b>	Machined pure aluminum with anodize finish
<b>BASE TYPE</b>	2/3/4-phase; Surface Mounted.
<b>DIMMABILITY</b>	Non-dimmable Model

## Product Details



10th floor, building C1, Songhu Zhigu building, No. 9, Yanhe South Road, Liaobu Town, Dongguan City, Guangdong Province, China.

[liu@fitlight-tech.com](mailto:liu@fitlight-tech.com)

[www.fitlight-tech.com](http://www.fitlight-tech.com) / <https://fitlight.en.alibaba.com>

## ENVIRONMENTAL SPECIFICATIONS

**TEMPERATURE RANGE** Ambient: -20°C to 40°C; Surface of Lamp: 60°C to 70°C

**HUMIDITY RANGE** 0 to 95% non-condensing humidity

## PRODUCT CODE: FT-TL22-X<sub>1</sub>/X<sub>2</sub>

X1: Power

X2: LED chip(C-CREE or E-EPISTAR)

## PRODUCT SIZE

### Product size




10th floor, building C1, Songhu Zhigu building, No. 9, Yanhe South Road, Liaobu Town, Dongguan City, Guangdong Province, China.

[liu@fitlight-tech.com](mailto:liu@fitlight-tech.com)

[www.fitlight-tech.com](http://www.fitlight-tech.com) / <https://fitlight.en.alibaba.com>

## INSTALLATION DIAGRAM (rail-mounted)

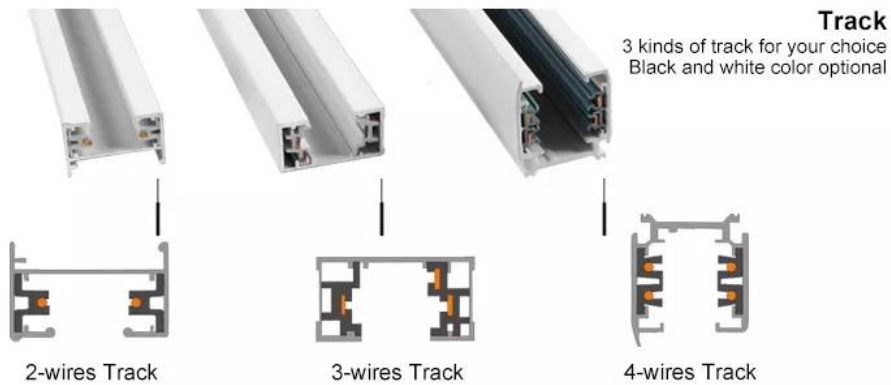

### 1. Two-wires Track Light Installation



### 2. Three-wires Installation




### 3. Four-wires Installation



10th floor, building C1, Songhu Zhigu building, No. 9, Yanhe South Road, Liaobu Town, Dongguan City, Guangdong Province, China.

[liu@fitlight-tech.com](mailto:liu@fitlight-tech.com)

[www.fitlight-tech.com](http://www.fitlight-tech.com) / <https://fitlight.en.alibaba.com>

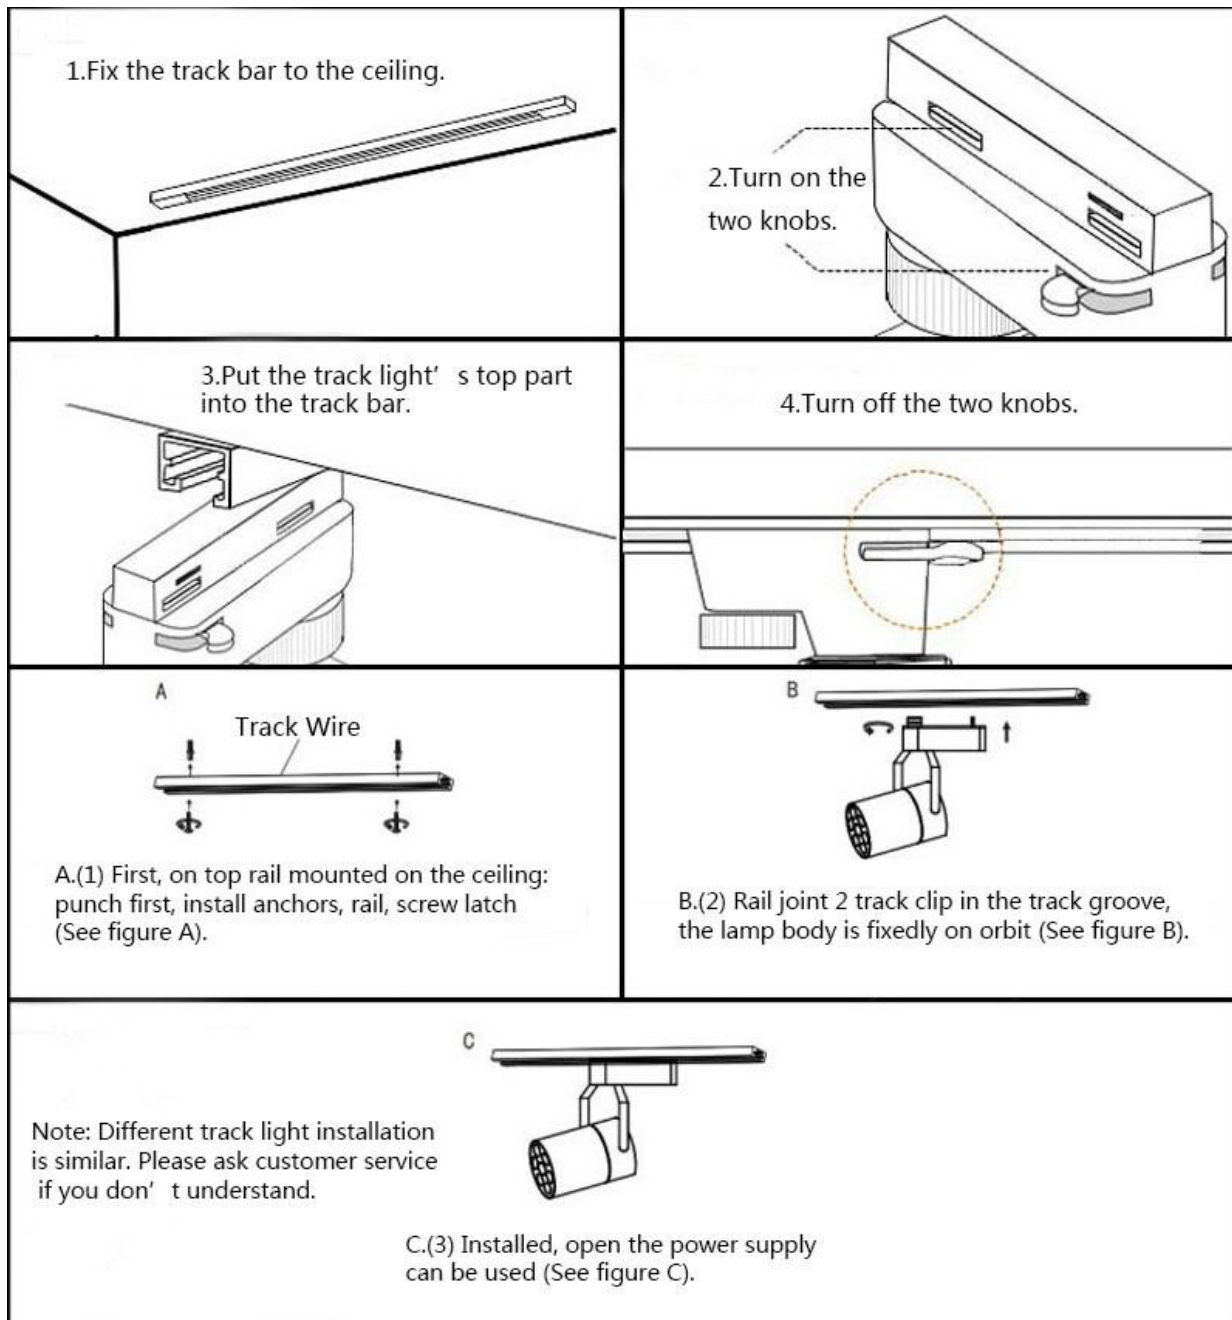

Specifications are subject to change without notice.  
Copyright Fitlight Technologies Co., Ltd. All rights reserved.

10th floor, building C1, Songhu Zhigu building, No. 9, Yanhe South Road, Liaobu Town, Dongguan City, Guangdong Province, China.

[liu@fitlight-tech.com](mailto:liu@fitlight-tech.com)

[www.fitlight-tech.com](http://www.fitlight-tech.com) / <https://fitlight.en.alibaba.com>