FEITL

Dongguan Fitlight Lighting Co.,Ltd.

东莞市菲特莱照明有限公司

DONGGUAN FITLIGHT LIGHTING CO.,LTD.

Phone : +86 13632851264

Email : liu@fitlight-tech.com

URL: www.fitlight-tech.com

https://fitlight.en.alibaba.com

Add: 10th floor, building C1, Songhu Zhigu building, No. 9, Yanhe South Road, Liaobu Town, Dongguan City, Guangdong Province, China

www.fitlight-tech.com

https://fitlight.en.alibaba.com

WeChat

WhatsApp

FEITL

Dongguan Fitlight Lighting Co.,Ltd.



YOUR OEM/ODM PARTNER

东莞市菲特莱照明有限公司

DONGGUAN FITLIGHT LIGHTING CO.,LTD.

FEITL

Dongguan Fitlight Lighting Co.,Ltd.

COMPANY PROFILE

公司简介

Our History

Dongguan Fitlight Lighting Co.,Ltd. is a professional ODM/OEM LED lighting manufacturer, supplier and factory in China, dedicating to designing & manufacturing the high end and high quality lighting fixtures since its establishment in 2010.

Our Factory

Dongguan Fitlight Lighting Co.,Ltd. headquarters located in Dongguan, occupying an area of 3000+ m^2 factory building in Dongguan City. The products are mainly exported to America, Canada, United Kingdom, Germany, Italy, Spain, France, Australia,Japan, Southeast Asia, Middle East regions etc.

Our Product

Dongguan Fitlight Lighting Co.,Ltd. focuses on all series of residential, commerical, hotel, office, architectual lighting fixtures development and production, including LED track lights, LED downlights, LED gimbal lights, LED grille lights, LED ceiling spotlights, LED linear lights,Magnetic light fixture，etc. Due to pioneering capability in lighting fixture design, we has established partnership relationship with world top lighting brands. We are capable of customizing various LED lighting fixtures base on drawings provided by customers.

Our Certificate

As a leading lighting fixtures designer and manufacturer, we has been approved by CE, ROHS, SAA and passed ISO9001 quality management system to ensure products safety and high quality. The quality team has worked in the lighting industry since 2010.

Production Equipment

The laboratory and production line are equipped with complete quality control and testing equip-ments, including but no limited to light distribution systems, spectrum analysis test systems, temperature test systems, LED driver testers, dielectric strength tester, earth resistance tester etc.

14+years
Production experience


50+
Patent certificate

100+
Projects

10000+pcs
Daily output value

100+
Service country

3000m²
Factory space

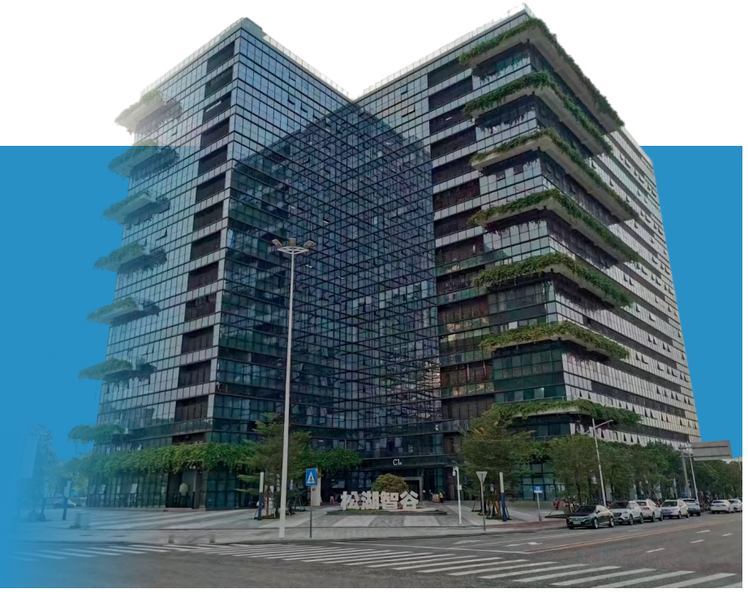

工厂展示

Factory Show

FEITL

Dongguan Fitlight Lighting Co.,Ltd.



Production Line 1



Production Line 2



Production Line 3



Production Line 4




Aging Test




Raw Material Warehouse




Packaging Warehouse

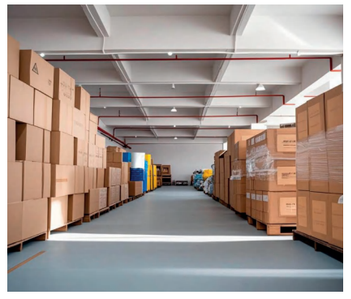

Finished Goods Warehouse



IES Testing Equipment 1



IES Testing Equipment 2



IS Test Rig




Laser Marker

OUR CERTIFICATE
产品认证



OUR PATENT
产品专利

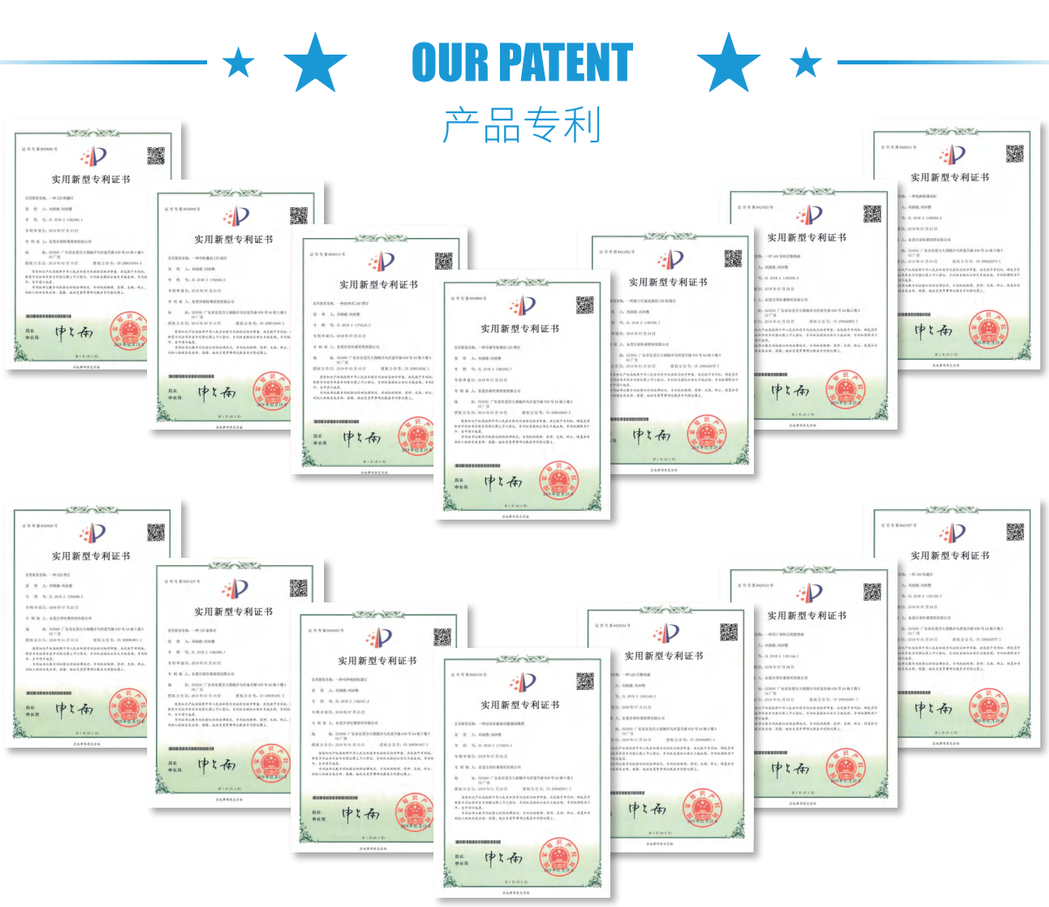

PRCDUCT OVERVIEW 产品目录


01 TL01 LED Track Light


02 TL02 Built-in Driver Zoom Track Light


03 TL04 Zoomable Track Light


04 TL05 Integrated Drive Zoom Track Light


05 TL06 High Efficiency LED Track Light


06 TL21 Built-in Driver Track Light


07 TL22 LED Track Light


08 TL23 Surface Mounted Track Light


09 TL24 Integrated Drive Track Light


10 TL25 Built-in Driver Track Light


11 TL26 LED Track Light


12 TL27/TL28/TL03 LED Track Light


13 DLT03 LED Down Light


14 DLT04 High Efficiency LED Down Light


15 DLT05 High Efficiency LED Down Light


16 DLT09 IP65 Waterproof LED Down Light


17 DLT10 LED Down Light



18 DLT11 LED Down Light


19 DLT14 High Efficiency LED Down Light


20 DLT06/ DLT07/DLT10 SMD LED Down Light


21 MDL05（Reflector）Surface-mounted Round LED Down Light


22 MDL05（PC）Surface-mounted Round LED Down Light


23 MDL06 IP65 Waterproof Surface-mounted LED Down Light


24 MDL09 Surface-mounted LED Down Light



25 MDL01/ MDL07 / MDL08 Surface-mounted LED Down Light


26 HGS06 Anti-glare LED Down Light


27 HGS09 Anti-glare LED Down Light


28 HGS10（Round frame）Anti-glare LED Down Light


29 HGS10（Square frame）Anti-glare LED Down Light


30 30.HGS10 -two/three/four head Series of Anti-glare LED Down Light


31 HGS014 Mini Embedded Anti-glare LED Down Light


32 HGS10 Trimless/HGS11 Anti-glare LED Down Light


33 HGS12/HGS13/HGS15 Anti-glare LED Down Light


34 HGS16/ HGS17/HGS18 Mini Embedded Anti-glare LED Down Light


35 GL03（Round and frame）/Two head Series of LED Down Light


36 GL04（Round and frame）/Two head Series of LED Down Light


37 GL05-one/two/three head Series of LED Down Light


38 GL07-one/two/three head Series of LED Down Light

39 GL08-one/two/three head Series of LED Down Light

40 GL02/GL07 four head/ GL08 four head series Down Light

41 LL1 LED Linear Light

42 LL1 LED Linear Track Light

43 LL2 Embedded linear light/LL3 Seamless Splicing linear light

45 2.0 Magnetic Flood Light/Grille Light/ Folding Grille Light

46 2.0 Magnetic Folding Grille Light/Track Light/ Pendant Light

47 2.0 Magnetic Accessories And Connection Methods

49 26 Model Ultrathin Magnetic

50 26 Model Ultrathin Magnetic

LED TRACK LIGHT

FT-TL01 | series track light

20W/25W/30W/35W/40W/45W/50W

FEATURES

- High Luminous Efficacy
- Adjustable Beam Flexibility
- Smart Dimming Compatibility
- Aerospace-Grade Aluminum Housing
- Certified Performance Assurance
- Support Single/Three-Circuit Configurations



Finish: White Black

合作拍档 Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片 More pictures



规格参数 Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL01-20W	20W	D100*H140	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-25W	25W	D100*H140	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-30W	30W	D100*H160	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-35W	35W	D100*H160	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-40W	40W	D100*H200	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-45W	45W	D100*H200	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray
FT-TL01-50W	50W	D100*H200	200-240V	4000-4250Lm	CREE or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White /Gray

LED TRACK LIGHT

FT-TL02 | series track light

15W/20W/25W/30W/35W

FEATURES

- 10° -55° Zoom Adjustable Beam Angle
- 355° Rotation + 90° Tilt
- High Thermal Conductivity
- Track System Compatibility
- Flicker-Free Driver
- High-Precision Optics， uniform light output



Finish: White Black

合作拍档 Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片 More pictures



规格参数 Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL02-15W	15W	D55*H140	200-240V	1200-1275lm	Osram or CREE COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac	Black /White
FT-TL02-20W	20W	D65*H147	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac	Black /White
FT-TL02-25W	25W	D75*H159	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac	Black /White
FT-TL02-30W	30W	D85*H165	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac	Black /White
FT-TL02-35W	35W	D95*H170	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac	Black /White

LED TRACK LIGHT

FT-TL04 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- 10° -55° Zoom Adjustable Beam Angle
- Multiple CCT Options：2700K-6500K
- Compatible with smart lighting control systems
- Robust Construction-corrosion-resistant finish
- Long Lifespan-50,000 hours(L70, @Ta=25° C)
- Optional Smart Control-Bluetooth/Zigbee

Finish: White Black



合作拍档 Our Partners (Chips and Driver)

更多图片 More pictures



规格参数 Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL04-15W	15W	D55*H140	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL04-20W	20W	D65*H147	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL04-25W	25W	D75*H159	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL04-30W	30W	D85*H165	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL04-35W	35W	D85*H165	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL04-40W	40W	D95*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	0-10V,DALI	Black /White
FT-TL04-45W	45W	D95*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	0-10V,DALI	Black /White

LED TRACK LIGHT

FT-TL05 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- 10° -55° Zoom Adjustable Beam Angle
- Integrated Driver & Adaptor Design
- Supports smart lighting control systems
- Multi-Circuit Track Compatibility
- Flicker-Free & Stable Output
- Bluetooth/Zigbee ready for smart lighting integration

Finish: White Black



合作拍档 Our Partners (Chips and Driver)

更多图片 More pictures



规格参数 Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL05-15W	15W	D55*H140	200-240V	1200-1275lm	Osram or CREE COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL05-20W	20W	D65*H147	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL05-25W	25W	D75*H159	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL05-30W	30W	D85*H165	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL05-35W	35W	D85*H165	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL05-40W	40W	D95*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL05-45W	45W	D95*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	10° -55° Adjustable	4-phase	0.95	Triac,0-10V,DALI	Black /White

TL06 高光效轨道灯
TL06 High Efficiency LED Track Light


LED TRACK LIGHT

FT-TL06 | series track light

25W/30W/35W/40W/45W

FEATURES

- Ultra-High Efficiency 160LM/W
- Premium LED Chips CRI ⩾ 90
- 355° rotation + 90° tilt for perfect aiming
- Flicker-Free Performance - >0.95 PF with <10% THD
- Dimmable Options- 0-10V/DALI/TRIAC compatible
- Superior heat dissipation with military-grade durability

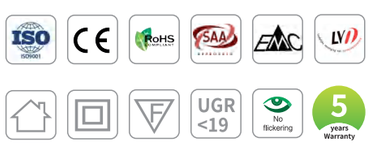

Finish: White Black



160LM/W

90° Vertical 90° rotation

355° Horizontal 355° rotation



合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL06-25W	25W	D91*H113	200-240V	4000Lm	Bridgelux	2700-6000K	> 90Ra	38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL06-30W	30W	D91*H113	200-240V	4800Lm	Bridgelux	2700-6000K	> 90Ra	38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL06-35W	35W	D91*H113	200-240V	5600Lm	Bridgelux	2700-6000K	> 90Ra	38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL06-40W	40W	D105*H130	200-240V	6400Lm	Bridgelux	2700-6000K	> 90Ra	38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL06-45W	45W	D105*H130	200-240V	7200Lm	Bridgelux	2700-6000K	> 90Ra	38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White

TL21 电源内置款轨道灯
TL21 Built-in Driver Track Light


LED TRACK LIGHT

FT-TL21 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- Built-in Driver Track Light
- Aerospace-Grade Aluminum
- CRI ⩾ 90 - Museum-grade color rendering
- 15° /24° /38° /60° beam options (UGR<19)
- True Flicker-Free - <1% flicker at all dim levels
- 0-10V/DALI/TRIAC/TUYA multi-protocol

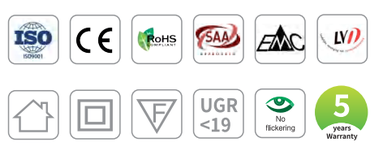

Finish: White Black



Built-in Driver



合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL21-15W	15W	D60*H167	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac	Black /White
FT-TL21-20W	20W	D70*H170	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac	Black /White
FT-TL21-25W	25W	D70*H170	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac	Black /White
FT-TL21-30W	30W	D80*H177	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac	Black /White
FT-TL21-35W	35W	D80*H177	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac	Black /White
FT-TL21-40W	40W	D90*H182	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac	Black /White
FT-TL21-45W	45W	D90*H182	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac	Black /White

LED TRACK LIGHT

FT-TL22 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- Stable Power Supply
- Flicker-Free Lighting
- Durable Aluminum Housing
- Excellent Heat Dissipation
- Compatible with 0-10V/TRIAC/DALI
- Energy-saving with superior luminous efficacy

Finish: White Black



15° 24° 38° 60°

合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL22-15W	15W	D60*H167	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL22-20W	20W	D70*H170	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL22-25W	25W	D70*H170	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL22-30W	30W	D80*H177	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL22-35W	35W	D80*H177	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL22-40W	40W	D90*H182	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL22-45W	45W	D90*H182	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White

LED TRACK LIGHT

FT-TL23 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- High CRI (⩾ 90)
- Certified Safety Standards
- Corrosion-Resistant Finish
- Rotate and tilt without tools
- 2700K-6500K (warm to cool white)
- Easy installation and maintenance

Finish: White Black



15° 24° 38° 60°

合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL23-15W	15W	D60*H167	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL23-20W	20W	D70*H170	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL23-25W	25W	D70*H170	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL23-30W	30W	D80*H177	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL23-35W	35W	D80*H177	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL23-40W	40W	D90*H182	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL23-45W	45W	D90*H182	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38° /60°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White

LED TRACK LIGHT

FT-TL24 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- Supports smart lighting control systems
- High-quality constant current driver(PF>0.95)
- Quick-lock mechanism for fast, secure mounting
- Works with H-type,3-phase, and standard tracks
- Integrated Driver–Compact, space-saving structure
- Full flexibility for precise directional lighting



Integrated Drive

Finish: White Black

90° Vertical 90° rotation

355° Horizontal 355° rotation

24° 38°

合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL24-15W	15W	D55*H120	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL24-20W	20W	D65*H128	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL24-25W	25W	D75*H150	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL24-30W	30W	D75*H150	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL24-35W	35W	D85*H160	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL24-40W	40W	D95*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL24-45W	45W	D95*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	4-phase	0.95	Triac,0-10V,DALI	Black /White

LED TRACK LIGHT

FT-TL25 | series track light

15W/20W/25W/30W/35W/40W

FEATURES

- Built-in Driver Track Light
- Cold-Forged Aluminum Housing
- >0.95 PF with <10% THD
- Exceptional brightness with energy-saving LED technology
- 360° rotational track heads with ±90° tilt adjustment
- Support single/three-circuit configuration



Built-in Driver

Finish: White Black

90° Vertical 90° rotation

355° Horizontal 355° rotation

24° 38°

合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL25-15W	15W	D55*H120	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac	Black /White
FT-TL25-20W	20W	D65*H128	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac	Black /White
FT-TL25-25W	25W	D75*H150	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac	Black /White
FT-TL25-30W	30W	D75*H150	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac	Black /White
FT-TL25-35W	35W	D85*H160	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac	Black /White
FT-TL25-40W	40W	D95*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac	Black /White

LED TRACK LIGHT

FT-TL26 | series track light

15W/20W/25W/30W/35W/40W/45W

FEATURES

- Certified Safety Standards
- Environmentally Friendly-RoHS compliant
- 5-Year Warranty-Industry-leading protection
- 50,000-Hour Lifespan- L90@50,000hrs (Ta=25° C)
- Smart Lighting Read-Optional Bluetooth/Zigbee mesh
- Cold-Forged Aluminum-30% better heat dissipation than die-cast



Drive External

Finish: White Black

90° Vertical 90° rotation

355° Horizontal 355° rotation

24° 38°

合作拍档
Our Partners (Chips and Driver)

CITILED The Light Engine, CREE, EPISTAR, OSRAM, powered by TRIDONIC, LUMINUS, PHILIPS, LiFud

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	轨道接头 Track Adaptor	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-TL26-15W	15W	D55*H120	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL26-20W	20W	D65*H128	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.5	Triac,0-10V,DALI	Black /White
FT-TL26-25W	25W	D75*H150	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL26-30W	30W	D75*H150	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL26-35W	35W	D85*H160	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL26-40W	40W	D95*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	Triac,0-10V,DALI	Black /White
FT-TL26-45W	45W	D95*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /38°	2/3/4-phase	0.95	0-10V,DALI	Black /White

LED TRACK LIGHT



15° 24° 36° 50°

型号 Model	FT-TL27-10W	FT-TL27-15W	FT-TL27-20W	FT-TL27-25W	FT-TL27-30W	FT-TL27-35W
功率 Power	10W	15W	20W	25W	30W	35W
尺寸 Size(mm)	D48*H120	D58*H135	D68*H155	D68*H155	D80*H155	D80*H155
输入电压 Voltage	200-240V					
光通量 Lumen	850-900lm	1275-1350Lm	1700-1800Lm	2125-2250Lm	2550-2700Lm	2975-3150Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° /24° /36° /50°					
轨道接头 Track Adaptor	2/3/4-phase					
功率因素 PF	0.5		0.95			
可否调光 Dim	Triac,0-10V,DALI					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					



15° 24° 36° 50°

型号 Model	FT-TL28-10W	FT-TL28-15W	FT-TL28-20W	FT-TL28-25W	FT-TL28-30W	FT-TL28-35W
功率 Power	10W	15W	20W	25W	30W	35W
尺寸 Size(mm)	D54*H135	D65*H140	D76*H153	D76*H153	D86*H165	D86*H165
输入电压 Voltage	200-240V					
光通量 Lumen	850-900lm	1275-1350Lm	1700-1800Lm	2125-2250Lm	2550-2700Lm	2975-3150Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° /24° /36° /50°					
轨道接头 Track Adaptor	2/3/4-phase					
功率因素 PF	0.5		0.95			
可否调光 Dim	Triac,0-10V,DALI					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					



15° 24° 36° 60°

型号 Model	FT-TL03-15W	FT-TL03-20W	FT-TL03-25W	FT-TL03-30W	FT-TL03-35W	FT-TL03-40W
功率 Power	15W	20W	25W	30W	35W	40W
尺寸 Size(mm)	D60*L135	D70*L138	D70*L138	D80*L143	D80*L143	D90*L150
输入电压 Voltage	200-240V					
光通量 Lumen	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm	3200-3400Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° /24° /36° /60°					
轨道接头 Track Adaptor	2/3/4-phase					
功率因素 PF	0.5		0.95			
可否调光 Dim	Triac					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					

LED DOWN LIGHT

FT-DLT03 | series
LED Down light

5W/7W/10W/12W/15W/20W/25W/30W
35W/40W/45W/50W

FEATURES

- High-efficiency LED chips，CRI ⩾ 90
- Multiple beam angles (15° /24° /38°)
- 355° horizontal rotation，75° vertical tilt
- Dimmable Options- 0-10V/DALI/TRIAC compatible
- Advanced heat dissipation – Extends LED lifespan
- Flicker free technology-reduces eye strain in workspaces

Finish: White Black



产品应用
Product application



更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT03-5W	5W	D85*H76	¢ 75MM	200-240V	400-425Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-7W	7W	D85*H76	¢ 75MM	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-10W	10W	D110*H90	¢ 95MM	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-12W	12W	D110*H95	¢ 95MM	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-15W	15W	D110*H95	¢ 95MM	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-20W	20W	D140*H120	¢ 125MM	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT03-25W	25W	D140*H120	¢ 125MM	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT03-30W	30W	D165*H145	¢ 145MM	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT03-35W	35W	D165*H145	¢ 145MM	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT03-40W	40W	D190*H155	¢ 175MM	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	0-10V,DALI	Black /White
FT-DLT03-45W	45W	D190*H155	¢ 175MM	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	0-10V,DALI	Black /White
FT-DLT03-50W	50W	D190*H155	¢ 175MM	200-240V	4000-4250Lm	Cree or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38°	0.95	/	Black /White

LED DOWN LIGHT

FT-DLT04 | series
LED Down light

10W/15W/20W/25W/30W/35W/40W/45W
/50W

FEATURES

- Ultra-High Efficiency-150-160LM/W
- IP54 Rate-Dust-protected and splash-resistant
- Embedded Design–Sleek recessed installation
- Long Lifespan–Up to 50,000 hours of operation
- Energy-Saving–Significantly reduces power consumption
- SMD LED Technology,superior brightness and reliability

Finish: White Black



IP54

150-160LM/W

Non Dim | Triac | 0/1-10V | DALI | 60°

产品应用
Product application



更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT04-10W	10W	D83*H65	¢ 75	200-240V	1500Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT04-15W	15W	D83*H65	¢ 75	200-240V	2250Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT04-20W	20W	D103*H70	¢ 95	200-240V	3200Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT04-25W	25W	D103*H70	¢ 95	200-240V	3750Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT04-30W	30W	D132*H75	¢ 125	200-240V	4800 Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT04-35W	35W	D160*H80	¢ 145	200-240V	5400 Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT04-40W	40W	D160*H80	¢ 145	200-240V	6400 Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	0-10V,DALI	IP54
FT-DLT04-45W	45W	D180*H85	¢ 165	200-240V	7200Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	0-10V,DALI	IP54
FT-DLT04-50W	50W	D180*H85	¢ 165	200-240V	7800Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	/	IP54

LED DOWN LIGHT

FT-DLT05 | series
LED Down light

10W/15W/20W/25W/30W/35W/40W/45W
/50W

FEATURES

- Lightweight Design–Easy to install and handle
- High lumen150-160LM/W–More light with less energy
- Low Heat Generation，efficient thermal management
- Flicker Free–Stable light output for eye comfort
- Robust Housing–Durable construction for long-term use
- High CRI(⩾ 90)-Ensures accurate and vibrant color rendering

Finish: White Black




IP54


150-160LM/W

Non Dim | Triac | 0/1-10V | DALI | 60°

色温图示
Color temperature diagram

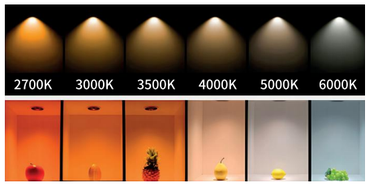

更多图片
More pictures

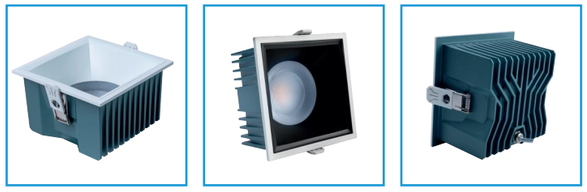

规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT05-10W	10W	90*90*60	75*75	200-240V	1500Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT05-15W	15W	90*90*60	75*75	200-240V	2250Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT05-20W	20W	110*110*70	95*95	200-240V	3200Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.5	Triac,0-10V,DALI	IP54
FT-DLT05-25W	25W	145*145*75	125*125	200-240V	3750Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT05-30W	30W	145*145*75	125*125	200-240V	4800Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT05-35W	35W	165*165*85	145*145	200-240V	5400Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	Triac,0-10V,DALI	IP54
FT-DLT05-40W	40W	165*165*85	145*145	200-240V	6400Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	0-10V,DALI	IP54
FT-DLT05-45W	45W	185*185*92	165*165	200-240V	7200Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	0-10V,DALI	IP54
FT-DLT05-50W	50W	185*185*92	165*165	200-240V	7800Lm	Bridgelux SMD	2700-6000K	> 90Ra	60°	0.95	/	IP54

LED DOWN LIGHT

FT-DLT09 | series
LED Down light

10W/15W/20W/30W/40W/50W/70W/80W

IP65

FEATURES


- IP65 Rated-Fully dustproof and waterproof
- High Lumen Efficacy– Optimized for brightness
- Long Lifespan-Up to 50,000 hours of operation
- High Power Factor (PF >0.9)–Reduces energy waste
- Flicker-Free–Stable light output for eye comfort
- High-Efficiency-saving with excellent lumen output

Finish: White Black



24° | 45° | 60°

色温图示
Color temperature diagram

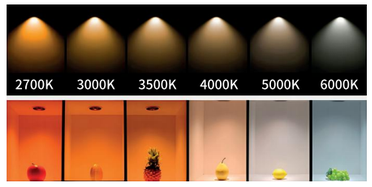

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT09-10W	10W	D85*H70	¢ 75	100-277V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.5	IP65	Black /White
FT-DLT09-15W	15W	D110*H78	¢ 90	100-277V	1200-1275Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.5	IP65	Black /White
FT-DLT09-20W	20W	D135*H91	¢ 120	100-277V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.5	IP65	Black /White
FT-DLT09-30W	30W	D180*H106	¢ 160	100-277V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.95	IP65	Black /White
FT-DLT09-40W	40W	D180*H106	¢ 160	100-277V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.95	IP65	Black /White
FT-DLT09-50W	50W	D242*H120	¢ 220	100-277V	4000-4250Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.95	IP65	Black /White
FT-DLT09-70W	70W	D242*H120	¢ 220	100-277V	5600-5950Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.95	IP65	Black /White
FT-DLT09-80W	80W	D242*H120	¢ 220	100-277V	6400-6800Lm	Osram or Epistar SMD	2700-6000K	>80Ra or 90Ra	24° /45° / 60°	0.95	IP65	Black /White

FT-DLT10 | series
LED Down light

5W/7W/9W/10W/12W/15W/20W/25W/30W/35W/40W/45W

FEATURES

- High Power Factor (PF >0.9)–Optimizes energy usage
- Multiple Color Temperatures– 2700K-6000K options
- ECO-Friendly–Mercury-free and recyclable
- Low UV/IR Emission–Safe for sensitive environments
- Corrosion-Resistant–Suitable for humid or coastal areas
- Warranty Protection–5 years warranty for peace of mind

Finish: White Black





产品应用
Product application



更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT10-5W	5W	D60*H35	¢ 55	200-240V	400-425Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-7W	7W	D85*H45	¢ 75	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-9W	9W	D85*H45	¢ 75	200-240V	720-765Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-10W	10W	D90*H47	¢ 80	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-12W	12W	D105*H50	¢ 95	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-15W	15W	D105*H50	¢ 95	200-240V	1200-1275Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-20W	20W	D130*H52	¢ 120	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT10-25W	25W	D160*H60	¢ 145	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT10-30W	30W	D175*H63	¢ 160	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT10-35W	35W	D175*H63	¢ 160	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT10-40W	40W	D220*H75	¢ 200	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.95	0-10V,DALI	Black /White
FT-DLT10-45W	45W	D220*H75	¢ 200	200-240V	3600-3825Lm	Cree or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /38° /60°	0.95	0-10V,DALI	Black /White

FT-DLT11 | series
LED Down light

7W/10W/12W/15W/20W/25W/30W/35W/40W/45W/50W/55W

FEATURES


- 0-10V/DALI/TRIAC/TUYA multi-protocol
- Surge Protection-Withstands voltage fluctuations
- Quick-Connect Terminals-Simplifies installation
- ODM/OEM Support-Custom solutions available for bulk orders
- Adjustable Trim Options-Customizable bezel colors/finishes
- High Lumen Output–Bright illumination with low energy use

Finish: White Black





色温图示
Color temperature diagram

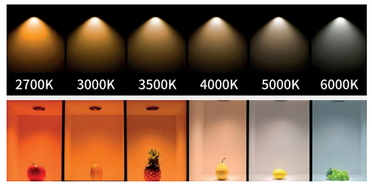

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT11-7W	7W	D62*H59	¢ 55	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT11-10W	10W	D85*H64	¢ 75	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT11-12W	12W	D85*H64	¢ 75	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT11-15W	15W	D105*H72	¢ 95	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT11-20W	20W	D130*H73	¢ 115	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT11-25W	25W	D130*H73	¢ 115	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT11-30W	30W	D170*H80	¢ 145	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT11-35W	35W	D170*H80	¢ 145	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT11-40W	40W	D195*H85	¢ 170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	0-10V,DALI	Black /White
FT-DLT11-45W	45W	D195*H85	¢ 170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	0-10V,DALI	Black /White
FT-DLT11-50W	50W	D235*H88	¢ 200	200-240V	4000-4250Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	/	Black /White
FT-DLT11-55W	55W	D235*H88	¢ 200	200-240V	4400-4675Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° / 24° /36° /55°	0.95	/	Black /White

LED DOWN LIGHT

FT-DLT14 | series
LED Down light

7W/10W/12W/15W/18W/20W/25W/30W/35W/
40W/45W/50W/60W/70W/80W/100W

FEATURES

- Ultra-High Efficiency 140-160LM/W
- 5-year warranty-Reliable quality assurance
- 50,000+ hours lifespan-Lower maintenance costs
- Low power consumption-Saves on electricity bills
- High-efficiency LED chips-Bright, consistent illumination
- Surge&overvoltage protection–Protects against power fluctuations




140-160LM/W

Non Dim | Triac | 0/1-10V | DALI | 120°

Finish: ☐ White ■ Black

色温图示
Color temperature diagram

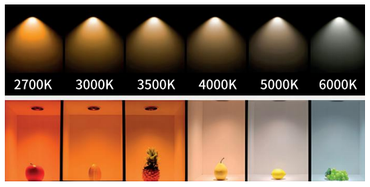

更多图片
More pictures



规格参数
Product Specifications


型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out (mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-DLT14-7W	7W	D84*H42	¢ 75	200-240V	910Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-10W	10W	D84*H42	¢ 75	200-240V	1300Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-12W	12W	D90*H42	¢ 80	200-240V	1680Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-15W	15W	D90*H42	¢ 80	200-240V	2025Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-18W	18W	D105*H42	¢ 95	200-240V	2520Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-20W	20W	D130*H46	¢ 120	200-240V	2800Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-DLT14-25W	25W	D155*H46	¢ 140	200-240V	3750Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT14-30W	30W	D155*H46	¢ 140	200-240V	4500Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	Triac,0-10V,DALI	Black /White
FT-DLT14-35W	35W	D175*H49	¢ 160	200-240V	5250Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	0-10V,DALI	Black /White
FT-DLT14-40W	40W	D175*H49	¢ 160	200-240V	6000Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	0-10V,DALI	Black /White
FT-DLT14-45W	45W	D220*H57	¢ 200	200-240V	6300Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White
FT-DLT14-50W	50W	D220*H57	¢ 200	200-240V	7000Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White
FT-DLT14-60W	60W	D220*H57	¢ 200	200-240V	8100Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White
FT-DLT14-70W	70W	D240*H56	¢ 220	200-240V	9100Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White
FT-DLT14-80W	80W	D270*H56	¢ 240	200-240V	10500Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White
FT-DLT14-100W	100W	D290*H56	¢ 260	200-240V	14000Lm	Bridgelux SMD	2700-6000K	> 90Ra	120°	0.95	/	Black /White

LED DOWN LIGHT



120°

型号 Model	FT-DLT06-5W	FT-DLT06-7W	FT-DLT06-9W	FT-DLT06-12W	FT-DLT06-15W	FT-DLT06-20W	FT-DLT06-25W	FT-DLT06-30W	FT-DLT06-35W
功率 Power	5W	7W	9W	12W	15W	20W	25W	30W	35W
尺寸 Size(mm)	D90*H43	D115*H43	D145*H45	D145*H45	D166*H55	D190*H55	D225*H62	D225*H62	D250*H62
开孔 Cut out（mm）	¢ 70	¢ 90	¢ 120	¢ 120	¢ 140	¢ 160	¢ 200	¢ 200	¢ 230
输入电压 Voltage	200-240V								
光通量 Lumen	400-425Lm	560-595Lm	720-765Lm	960-1020Lm	1200-1275Lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB								
色温 Color temperature	2700-6000K								
显色指数 CRI	>80Ra or 90Ra								
发光角度 Beam Angle	120°								
功率因素 PF	0.5						0.95		
可否调光 Dim	Triac,0-10V,DALI								
外壳颜色 Shell color	Black /White								
认证 Certificate	CE/EMC/LVD/ROHS/SAA								
质保 Warranty	3 or 5 years warranty								

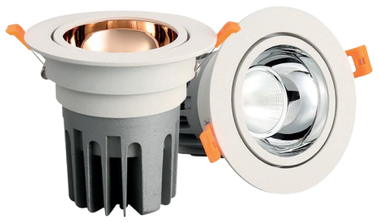

15° | 30° | 45°

型号 Model	FT-DLT07-7W	FT-DLT07-10W	FT-DLT07-12W	FT-DLT07-15W	FT-DLT07-20W	FT-DLT07-25W	FT-DLT07-30W	FT-DLT07-35W	FT-DL
功率 Power	7W	10W	12W	15W	20W	25W	30W	35W	40W
尺寸 Size(mm)	D90*H78	D90*H78	D90*H78	D108 *H100	D108 *H100	D138* H109	D138* H109	D160 *H125	D160 *H125
开孔 Cut out（mm）	¢ 75	¢ 75	¢ 75	¢ 95	¢ 95	¢ 120	¢ 120	¢ 145	¢ 145
输入电压 Voltage	200-240V								
光通量 Lumen	560-595Lm	800-850Lm	960-1020Lm	1200-1275Lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm	3200-3400Lm
光源 Chip	Osram or Epistar COB								
色温 Color temperature	2700-6000K								
显色指数 CRI	>80Ra or 90Ra								
发光角度 Beam Angle	15° /30° /45°								
功率因素 PF	0.5					0.95			
可否调光 Dim	Triac,0-10V,DALI								
外壳颜色 Shell color	Black /White								
认证 Certificate	CE/EMC/LVD/ROHS/SAA								
质保 Warranty	3 or 5 years warranty								



120°

型号 Model	FT-DLT10-5W	FT-DLT10-7W	FT-DLT10-9W	FT-DLT10-10W	FT-DLT10-12W	FT-DLT10-15W	FT-DLT10-20W	FT-DLT10-25W	FT-DLT10-30W	FT-DLT10-35W	FT-DLT10-40W	FT-DLT10-45W
功率 Power	5W	7W	9W	10W	12W	15W	20W	25W	30W	35W	40W	45W
尺寸 Size(mm)	D60* H35	D85* H45	D85* H45	D90* H47	D105* H50	D105* H50	D130* H52	D160* H60	D175* H63	D175* H63	D220* H75	D220* H75
开孔 Cut out（mm）	¢ 55	¢ 75	¢ 75	¢ 80	¢ 95	¢ 95	¢ 120	¢ 145	¢ 160	¢ 160	¢ 200	¢ 200
输入电压 Voltage	200-240V											
光通量 Lumen	400-425Lm	560-595Lm	720-765Lm	800-850Lm	960-1020Lm	1200-1275Lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm	3200-3400Lm	3600-3825Lm
光源 Chip	Osram or Epistar SMD											
色温 Color temperature	560-595Lm											
显色指数 CRI	>80Ra or 90Ra											
发光角度 Beam Angle	120°											
功率因素 PF	0.5							0.95				
可否调光 Dim	Triac,0-10V,DALI（5W-35W）										0-10V,DALI (40W/45W)	
外壳颜色 Shell color	Black /White											
认证 Certificate	CE/EMC/LVD/ROHS/SAA											
质保 Warranty	3 or 5 years warranty											


LED DOWN LIGHT

FT-MDL05 | series
Surface Mounted Downlight

7W/10W/12W/15W/20W/25W/30W/35W/
40W/45W

FEATURES

- Robust Aluminum Housing
- High-Efficiency Reflector Cup
- Energy-Saving LED Technology
- Multiple Color Temperatures-2700K-6500K
- Compatible with leading dimming systems (optional)
- Can be installed as ceiling-mounted or pendant-hung

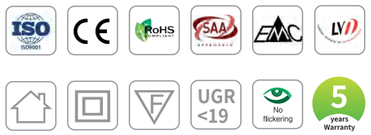


Finish: White Black






色温图示
Color temperature diagram

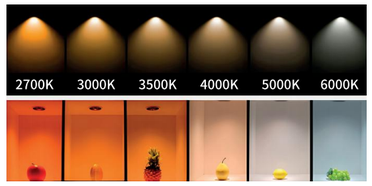

更多图片
More pictures

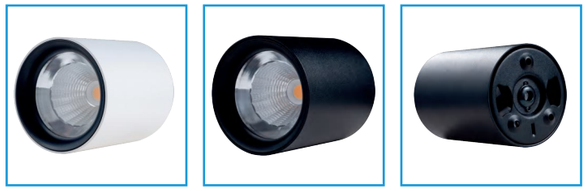

规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-MDL05-7W	7W	D75*H100	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-10W	10W	D75*H100	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-12W	12W	D75*H150	200-240V	960-1020lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-15W	15W	D75*H150	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-20W	20W	D95*H150	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-25W	25W	D115*H135	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-30W	30W	D115*H160	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-35W	35W	D140*H170	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-40W	40W	D140*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.95	0-10V,DALI	Black /White
FT-MDL05-45W	45W	D140*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	36° /60°	0.95	0-10V,DALI	Black /White


LED DOWN LIGHT

FT-MDL05 | series
Surface Mounted Downlight

7W/10W/12W/15W/20W/25W/30W/35W/
40W/45W

FEATURES

- 2700K-6000K (Warm to Cool White)
- Durable and heat-dissipating design
- Anti-Glare Design,IP20/IP44 Rated
- Even illumination for various applications
- Frosted Options– Soft or focused light output
- Low power consumption, high luminous efficacy

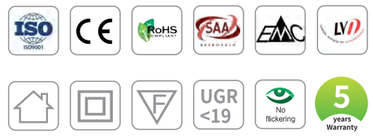


Finish: White Black






色温图示
Color temperature diagram

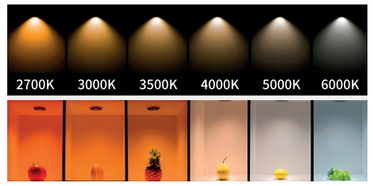

更多图片
More pictures

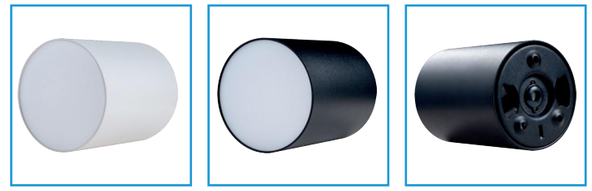

规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-MDL05-7W	7W	D75*H100	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-10W	10W	D75*H100	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-12W	12W	D75*H150	200-240V	960-1020lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-15W	15W	D75*H150	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-20W	20W	D95*H150	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL05-25W	25W	D115*H135	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-30W	30W	D115*H160	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-35W	35W	D140*H170	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL05-40W	40W	D140*H170	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.95	0-10V,DALI	Black /White
FT-MDL05-45W	45W	D140*H170	200-240V	3600-3825Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	120°	0.95	0-10V,DALI	Black /White

LED DOWN LIGHT

FT-MDL06 | series
Surface Mounted Downlight

10W/15W/20W/25W/30W/35W/40W/50W
/60W


IP65




FEATURES

- Flicker-Free & Low UV/IR Emission
- Optional Smart Control.OEM/ODM Support
- Multiple Color Temperatures–2700K-6000K
- Long Lifespan (50,000+ Hours),Low maintenance
- Sealed Gasket Design-Ensures waterproof integrity
- IP65 Waterproof Rating-Dustproof and protected against water jets

Finish: White Black



色温图示
Color temperature diagram

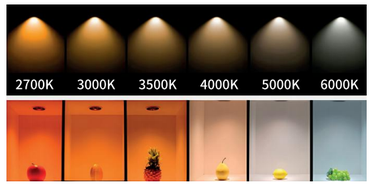

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-MDL06-10W	10W	D71*H100	100-277V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.5	IP65	Black /White
FT-MDL06-15W	15W	D90*H120	100-277V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.5	IP65	Black /White
FT-MDL06-20W	20W	D110*H145	100-277V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.5	IP65	Black /White
FT-MDL06-25W	25W	D110*H145	100-277V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White
FT-MDL06-30W	30W	D140*H170	100-277V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White
FT-MDL06-35W	35W	D140*H170	100-277V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White
FT-MDL06-40W	40W	D170*H190	100-277V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White
FT-MDL06-50W	50W	D200*H210	100-277V	4000-4250Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White
FT-MDL06-60W	60W	D200*H210	100-277V	4800-5100Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	30° / 60°	0.95	IP65	Black /White

LED DOWN LIGHT

FT-MDL09 | series
Surface Mounted Downlight


7W/10W/12W/15W/18W/20W/25W/30W/
35W/40W




FEATURES

- High CRI (⩾ 80/90),Multiple CCT Options
- Meets EU safety and environmental standards
- Surge Protection–Withstands voltage fluctuations
- Anti-Glare Design–Soft, comfortable illumination
- Impact-Resistant–Sturdy construction for long-term use
- Rust-Proof Screws & Fixtures – For long-lasting performance


Finish: White Black



色温图示
Color temperature diagram

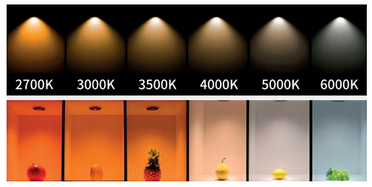


更多图片
More pictures

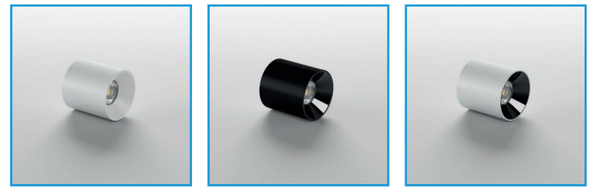

规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	外壳颜色 Shell color
FT-MDL09-7W	7W	D75*H90	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-10W	10W	D75*H90	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-12W	12W	D75*H90	200-240V	960-1020lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-15W	15W	D95*H105	200-240V	1200-1275lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-18W	18W	D95*H105	200-240V	1440-1530Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-20W	20W	D115*H120	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°°	0.5	Triac,0-10V,DALI	Black /White
FT-MDL09-25W	25W	D115*H120	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL09-30W	30W	D145*H140	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL09-35W	35W	D145*H140	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°	0.95	Triac,0-10V,DALI	Black /White
FT-MDL09-40W	40W	D145*H140	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /36° /60°°	0.95	0-10V,DALI	Black /White





型号 Model	FT-MDL01-5W	FT-MDL01-10W	FT-MDL01-15W	FT-MDL01-20W	FT-MDL01-25W	FT-MDL01-30W	FT-MDL01-35W	FT-MDL01-40W	FT-MDL01-45W	FT-MDL01-50W
功率 Power	5W	10W	15W	20W	25W	30W	35W	40W	45W	50W
尺寸 Size(mm)	D90* H90	D110* H120	D110* H120	D130* H152	D130* H152	D170* H185	D170* H185	D193* H193	D193* H193	D193* H193
输入电压 Voltage	200-240V									
光通量 Lumen	400-425Lm	800-850Lm	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm	3200-3400Lm	3600-3825Lm	4000-4250Lm
光源 Chip	Osram or Epistar COB									
色温 Color temperature	2700-6000K									
显色指数 CRI	>80Ra or 90Ra									
发光角度 Beam Angle	20° /45°									
功率因素 PF	0.5					0.95				
可否调光 Dim	Triac,0-10V,DALI							0-10V,DALI		/
外壳颜色 Shell color	Black /White									
认证 Certificate	CE/EMC/LVD/ROHS/SAA									
质保 Warranty	3 or 5 years warranty									





型号 Model	FT-MDL07-7W	FT-MDL07-10W	FT-MDL07-12W	FT-MDL07-15W	FT-MDL07-20W	FT-MDL07-25W	FT-MDL07-30W	FT-MDL07-35W	FT-MDL07-40W	FT-MDL07-45W
功率 Power	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W
尺寸 Size(mm)	D110 *H130	D110 *H130	D133 *H150	D133 *H150	D163 *H180	D163 *H180	D190 *H193	D190 *H193	D215 *H220	D215 *H220
输入电压 Voltage	200-240V									
光通量 Lumen	560-595Lm	800-850Lm	960-1020lm	1200-1275Lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm	3200-3400Lm	3600-3825Lm
光源 Chip	Osram or Epistar COB									
色温 Color temperature	2700-6000K									
显色指数 CRI	>80Ra or 90Ra									
发光角度 Beam Angle	36°									
功率因素 PF	0.5					0.95				
可否调光 Dim	Triac,0-10V,DALI								Triac	
外壳颜色 Shell color	Black /White									
认证 Certificate	CE/EMC/LVD/ROHS/SAA									
质保 Warranty	3 or 5 years warranty									





型号 Model	FT-MDL08-15W	FT-MDL08-20W	FT-MDL08-25W	FT-MDL08-30W	FT-MDL08-35W
功率 Power	15W	20W	25W	30W	35W
尺寸 Size(mm)	D55*H105	D65*H115	D75*H125	D85*H130	D85*H130
输入电压 Voltage	200-240V				
光通量 Lumen	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	10° -55° Adjustbale				
功率因素 PF	0.5			0.95	
可否调光 Dim	Triac,0-10V,DALI				
外壳颜色 Shell color	Black /White				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				

FT-HGS06 | series
Anti-glare LED Down Light

7W/10W/12W/15W/20W/25W/30W/35W/
40W



FEATURES

- High CRI (⩾ 80/90),Multiple CCT Options
- IP20/IP44 Options–Versatile for indoor
- Flicker-Free&Low UV/IR–Safe for prolonged exposure
- Dimmable (TRIAC/0-10V/DALI)–Smooth brightness control
- Aluminum Housing–Lightweight yet durable heat dissipation
- Multi-Color Reflector Cups-Optional silver, black, white,gold


Finish: White Black

Multi-Color Reflector Cups-Optional






色温图示
Color temperature diagram

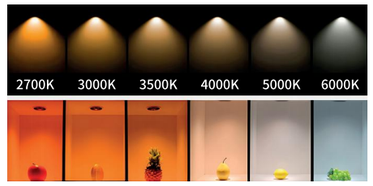

更多图片
More pictures

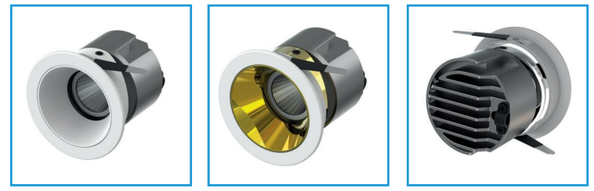

规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate
FT-HGS06-7W	7W	D63*H68	¢ 55	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.5	Triac,0-10V,DALI	IP20
FT-HGS06-10W	10W	D85*H76	¢ 75	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.5	Triac,0-10V,DALI	IP20
FT-HGS06-12W	12W	D85*H76	¢ 75	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.5	Triac,0-10V,DALI	IP20
FT-HGS06-15W	15W	D105*H99	¢ 95	200-240V	1200-1275Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.5	Triac,0-10V,DALI	IP20
FT-HGS06-20W	20W	D105*H99	¢ 95	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.5	Triac,0-10V,DALI	IP20
FT-HGS06-25W	25W	D105*H115	¢ 95	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.95	Triac,0-10V,DALI	IP20
FT-HGS06-30W	30W	D130*H123	¢ 120	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.95	Triac,0-10V,DALI	IP20
FT-HGS06-35W	35W	D150*H136	¢ 140	200-240V	2800-2975Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.95	Triac,0-10V,DALI	IP20
FT-HGS06-40W	40W	D150*H136	¢ 140	200-240V	3200-3400Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	15° /24° /38°	0.95	0-10V,DALI	IP20

LED DOWN LIGHT

FT-HGS09 | series
Anti-glare LED Down Light

7W/10W/12W/20W



FEATURES


- High CRI ⩾ 90-Excellent color rendering index
- Anti-Glare Deep Reflector-Minimizes direct glare
- Compatible with Tuya Smart Control(Zigbee/Bluetooth)
- Smart Dimming & Color Tuning-Brightness & CCT adjustment
- Multi-Color Reflector Cups- Optional silver/black/white/gold
- UGR<19-Ultra-low glare for comfortable lighting environments

Finish: White Black

Multi-Color Reflector Cups-Optional



产品应用
Product application

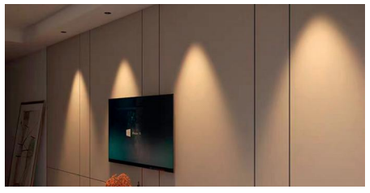

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate
FT-HGS09-7W	7W	D63*H43	¢ 55	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° / 15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS09-10W	10W	D85*H49	¢ 75	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° / 15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS09-12W	12W	D85*H49	¢ 75	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° / 15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS09-20W	20W	D105*H63	¢ 95	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° / 15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20

LED DOWN LIGHT

FT-HGS10 | series
Anti-glare LED Down Light

7W/10W/12W/15W/20W/25W/30W




FEATURES


- High CRI ⩾ 90-Excellent color rendering index
- Anti-Glare Deep Reflector-Minimizes direct glare
- Compatible with Tuya Smart Control(Zigbee/Bluetooth)
- Smart Dimming & Color Tuning-Brightness & CCT adjustment
- Multi-Color Reflector Cups- Optional silver/black/white/gold
- UGR<19-Ultra-low glare for comfortable lighting environments

Finish: White Black

Multi-Color Reflector Cups-Optional

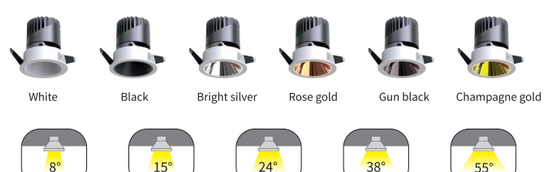

色温图示
Color temperature diagram

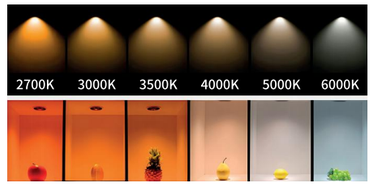

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate
FT-HGS10-7W	7W	D65*H75	¢ 55	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-10W	10W	D85*H90	¢ 56	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-12W	12W	D85*H90	¢ 75	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-15W	15W	D85*H100	¢ 75	200-240V	1200-1275Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-20W	20W	D105*H105	¢ 95	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-25W	25W	D105*H120	¢ 95	200-240V	2000-2125Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.95	Triac,0-10V,DALI	IP20
FT-HGS10-30W	30W	D105*H120	¢ 95	200-240V	2400-2550Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.95	Triac,0-10V,DALI	IP20

FT-HGS10 | series
Anti-glare LED Down Light

7W/10W/12W/15W/20W



FEATURES

- Flicker-Free-Eye protection technology
- Low Blue Light- Eye-friendly illumination
- DALI/DMX Compatible-For professional systems
- Multiple Beam Angles-8° /15° /24° /38° /55° options
- Uniform Light Distribution-No dark spots or shadows
- Premium Aluminum Housing-Excellent heat dissipation


Finish: White Black

Multi-Color Reflector Cups-Optional





色温图示
Color temperature diagram

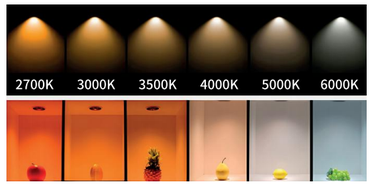

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate
FT-HGS10-7W	7W	85*85*79	75*75	200-240V	560-595Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-10W	10W	85*85*90	75*75	200-240V	800-850Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-12W	12W	85*85*90	75*75	200-240V	960-1020Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-15W	15W	85*85*100	75*75	200-240V	1200-1275Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20
FT-HGS10-20W	20W	85*85*100	75*75	200-240V	1600-1700Lm	Osram or Epistar COB	2700-6000K	>80Ra or 90Ra	8° /15° /24° /38° /55°	0.5	Triac,0-10V,DALI	IP20





型号 Model	FT-HGS10-2*7W	FT-HGS10-2*10W	FT-HGS10-2*12W	FT-HGS10-2*15W	FT-HGS10-2*20W
功率 Power	2*7W	2*10W	2*12W	2*15W	2*20W
尺寸 Size(mm)	170*85*79	170*85*90	170*85*90	170*85*100	170*85*100
开孔 Cut out（mm）	165*75				
输入电压 Voltage	200-240V				
光通量 Lumen	1120-1190Lm	1600-1700Lm	1920-2040Lm	2400-2550Lm	3200-3400Lm
光源 Chip	Osram or Epistar COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	8° /15° /24° /38° /55°				
功率因素 PF	0.5				
可否调光 Dim	Triac,0-10V,DALI				
防护等级 IP Rate	IP20				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				



型号 Model	FT-HGS10-3*7W	FT-HGS10-3*10W	FT-HGS10-3*12W	FT-HGS10-3*15W	FT-HGS10-3*20W
功率 Power	3*7W	3*10W	3*12W	3*15W	3*20W
尺寸 Size(mm)	225*85*79	225*85*90	225*85*90	225*85*100	225*85*100
开孔 Cut out（mm）	250*75				
输入电压 Voltage	200-240V				
光通量 Lumen	1680-1785Lm	2400-2550Lm	2880-3060Lm	3600-3825Lm	4800-5100Lm
光源 Chip	Osram or Epistar COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	8° /15° /24° /38° /55°				
功率因素 PF	0.5				
可否调光 Dim	Triac,0-10V,DALI				
防护等级 IP Rate	IP20				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				





型号 Model	FT-HGS10-4*7W	FT-HGS10-4*10W	FT-HGS10-4*12W	FT-HGS10-4*15W	FT-HGS10-4*20W
功率 Power	4*7W	4*10W	4*12W	4*15W	4*20W
尺寸 Size(mm)	170*170*79	170*170*90	170*170*90	170*170*100	170*170*100
开孔 Cut out（mm）	165*165				
输入电压 Voltage	200-240V				
光通量 Lumen	2240-2380Lm	3200-3400Lm	3840-4080Lm	4800-5100Lm	6400-6800Lm
光源 Chip	Osram or Epistar COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	8° /15° /24° /38° /55°				
功率因素 PF	0.5				
可否调光 Dim	Triac,0-10V,DALI				
防护等级 IP Rate	IP20				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				

LED DOWN LIGHT


FT-HGS14 | series
Mini Led Spotlight

3W/5W/7W/10W/12W/15W



FEATURES


- Deep Recessed Anti-Glare- UGR<19
- CE/RoHS/SAA certified for worldwide markets
- Dimmable 0-100%-Smooth brightness adjustment
- Compact&Sleek Design- Ultra-small form factor
- High CRI ⩾ 90-Professional-grade color rendering quality
- Ideal for display lighting in retail/homes/hotels/museums



Finish: White Black



光束角度图
Beam Angle Diagram

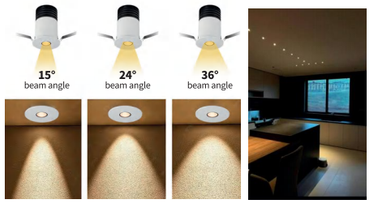

更多图片
More pictures



规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	开孔 Cut out（mm）	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate
FT-HGS14-3W	3W	D40*H54	¢ 35	200-240V	180Lm	XPE	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	/	IP20
FT-HGS14-5W	5W	D50*H71	¢ 45	200-240V	350Lm	Osram or Bridgelux COB	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	Triac,0-10V,DALI	IP20
FT-HGS14-7W	7W	D50*H71	¢ 45	200-240V	480Lm	Osram or Bridgelux COB	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	Triac,0-10V,DALI	IP20
FT-HGS14-10W	10W	D50*H71	¢ 45	200-240V	700Lm	Osram or Bridgelux COB	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	Triac,0-10V,DALI	IP20
FT-HGS14-12W	12W	D60*H85	¢ 55	200-240V	900Lm	Osram or Bridgelux COB	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	Triac,0-10V,DALI	IP20
FT-HGS14-15W	15W	D60*H85	¢ 55	200-240V	1050Lm	Osram or Bridgelux COB	2700-6000K	>80Ra or 90Ra	15° /24° /36°	0.5	Triac,0-10V,DALI	IP20

LED DOWN LIGHT





型号 Model	FT-HGS10-7W	FT-HGS10-10W	FT-HGS10-12W	FT-HGS10-15W	FT-HGS10-18W	FT-HGS10-20W	FT-HGS10-25W	FT-HGS10-30W
功率 Power	7W	10W	12W	15W	18W	20W	25W	30W
尺寸 Size(mm)	D110*H75	D145*H90	D145*H90	D145*H100	D145*H100	D172*H105	D172*H120	D172*H120
开孔 Cut out（mm）	¢ 60	¢ 80	¢ 80	¢ 80	¢ 80	¢ 100	¢ 100	¢ 100
输入电压 Voltage	200-240V							
光通量 Lumen	560-595Lm	800-850Lm	960-1020lm	1200-1275Lm	1440-1530Lm	1600-1700Lm	2000-2125Lm	2400-2550Lm
光源 Chip	Osram or Bridgelux COB							
色温 Color temperature	2700-6000K							
显色指数 CRI	>80Ra or 90Ra							
发光角度 Beam Angle	8° /15° /24° /38° /55°							
功率因素 PF	0.5						0.95	
可否调光 Dim	Triac,0-10V,DALI							
防护等级 IP Rate	IP20							
认证 Certificate	CE/EMC/LVD/ROHS/SAA							
质保 Warranty	3 or 5 years warranty							



型号 Model	FT-HGS11-7W	FT-HGS11-10W	FT-HGS11-10W	FT-HGS11-12W	FT-HGS11-15W	FT-HGS11-20W	FT-HGS11-20W	FT-HGS11-25W	FT-HGS11-25W	FT-HGS11-30W	FT-HGS11-35W
功率 Power	7W	10W	10W	12W	15W	20W	20W	25W	25W	30W	35W
尺寸 Size(mm)	D64*H87 Short radiator	D64*H87 Long radiator	D85* H92	D85* H92	D85* H100	D85* H100	D105* H120	D105* H120	D105* H150	D105*H 150	D105* H150
开孔 Cut out（mm）	¢ 55	¢ 55	¢ 75	¢ 75	¢ 75	¢ 95	¢ 95	¢ 95	¢ 95	¢ 95	¢ 95
输入电压 Voltage	200-240V										
光通量 Lumen	560-595Lm	800-850Lm	800-850Lm	960-1020Lm	1200-1275Lm	1600-1700Lm	1600-1700Lm	2000-2125Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Bridgelux COB										
色温 Color temperature	2700-6000K										
显色指数 CRI	>80Ra or 90Ra										
发光角度 Beam Angle	8° /15° /24° /38° /55°										
功率因素 PF	0.5							0.95			
可否调光 Dim	Triac,0-10V,DALI										
防护等级 IP Rate	IP20										
认证 Certificate	CE/EMC/LVD/ROHS/SAA										
质保 Warranty	3 or 5 years warranty										

HGS12/HGS13/HGS15 防眩射灯
HGS12/HGS13/HGS15 Anti-glare LED Down Light





型号 Model	FT-HGS12-7W	FT-HGS12-10W	FT-HGS12-10W	FT-HGS12-12W	FT-HGS12-20W
功率 Power	7W	10W	10W	12W	20W
尺寸 Size(mm)	D64*H88	D64*H88	D84*H98	D84*H98	D104*H116
开孔 Cut out（mm）	¢ 55	¢ 55	¢ 75	¢ 75	¢ 95
输入电压 Voltage	200-240V				
光通量 Lumen	560-595Lm	800-850Lm	800-850Lm	960-1020lm	1600-1700Lm
光源 Chip	Osram or Bridgelux COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	15° /24° /36° /55°				
功率因素 PF	0.5				
可否调光 Dim	Triac,0-10V,DALI				
防护等级 IP Rate	IP65				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				



型号 Model	FT-HGS13-3W	FT-HGS13-5W	FT-HGS13-7W	FT-HGS13-10W	FT-HGS13-12W	FT-HGS13-12W	FT-HGS13-15W
功率 Power	3W	5W	7W	10W	12W	12W	15W
尺寸 Size(mm)	D30*H44	D40*H47	D40*H66	D50*H70	D60*H74	D70*H55	D80*H58
开孔 Cut out（mm）	¢ 25	¢ 35	¢ 35	¢ 45	¢ 55	¢ 65	¢ 75
输入电压 Voltage	200-240V						
光通量 Lumen	560-595Lm	800-850Lm	960-1020lm	1200-1275Lm	1440-1530Lm	1600-1700Lm	2000-2125Lm
光源 Chip	Osram or Bridgelux COB						
色温 Color temperature	2700-6000K						
显色指数 CRI	>80Ra or 90Ra						
发光角度 Beam Angle	15° /24° /36°						
功率因素 PF	0.5						
可否调光 Dim	/	Triac,0-10V,DALI					
防护等级 IP Rate	IP20						
认证 Certificate	CE/EMC/LVD/ROHS/SAA						
质保 Warranty	3 or 5 years warranty						





型号 Model	FT-HGS15-5W	FT-HGS15-7W	FT-HGS15-10W	FT-HGS15-5W	FT-HGS15-7W	FT-HGS15-10W	FT-HGS15-12W	FT-HGS15-7W	FT-HGS15-10W	FT-HGS15-12W	FT-HGS15-15W	FT-HGS15-15W
功率 Power	5W	7W	10W	5W	7W	10W	12W	7W	10W	12W	15W	20W
尺寸 Size(mm)	D38 *H53	D38 *H76	D38 *H95	D45 *H58	D45 *H58	D45 *H80	D45 *H106	D55 *H63	D55 *H86	D55 *H86	D65 *H86	D65 *H105
开孔 Cut out（mm）	¢ 35	¢ 35	¢ 35	¢ 40	¢ 40	¢ 40	¢ 40	¢ 50	¢ 50	¢ 50	¢ 60	¢ 60
输入电压 Voltage	200-240V											
光通量 Lumen	350Lm	490Lm	700Lm	350Lm	490Lm	700Lm	900Lm	490Lm	700Lm	900Lm	1050Lm	1400Lm
光源 Chip	Osram or Bridgelux COB											
色温 Color temperature	2700-6000K											
显色指数 CRI	>80Ra or 90Ra											
发光角度 Beam Angle	15° /24° /36° /50°											
功率因素 PF	0.5											
可否调光 Dim	Triac,0-10V,DALI											
防护等级 IP Rate	IP20											
认证 Certificate	CE/EMC/LVD/ROHS/SAA											
质保 Warranty	3 or 5 years warranty											


HGS16/ HGS17/HGS18 迷你款射灯
HGS16/ HGS17/HGS18 Mini Embedded Anti-glare LED Down Light





型号 Model	FT-HGS16-5W	FT-HGS16-7W	FT-HGS16-10W	FT-HGS16-5W	FT-HGS16-7W	FT-HGS16-10W	FT-HGS16-12W	FT-HGS16-7W	FT-HGS16-10W	FT-HGS16-12W	FT-HGS16-15W	FT-HGS16-20W
功率 Power	5W	7W	10W	5W	7W	10W	12W	7W	10W	12W	15W	20W
尺寸 Size(mm)	D38 *H57	D38 *H80	D38 *H99	D45 *H68	D45 *H68	D45 *H90	D45 *H116	D55 *H73	D55 *H96	D55 *H96	D65 *H95	D65 *H115
开孔 Cut out（mm）	¢ 35	¢ 35	¢ 35	¢ 40	¢ 40	¢ 40	¢ 40	¢ 50	¢ 50	¢ 50	¢ 60	¢ 60
输入电压 Voltage	200-240V											
光通量 Lumen	350Lm	490Lm	700Lm	350Lm	490Lm	700Lm	900Lm	490Lm	700Lm	900Lm	1050Lm	1400Lm
光源 Chip	Osram or Bridgelux COB											
色温 Color temperature	2700-6000K											
显色指数 CRI	>80Ra or 90Ra											
发 光 角 度 Beam Angle	15° /24° /36°											
功率因素 PF	0.5											
可否调光 Dim	Triac,0-10V,DALI											
防护等级 IP Rate	IP20											
认证 Certificate	CE/EMC/LVD/ROHS/SAA											
质保 Warranty	3 or 5 years warranty											





型号 Model	FT-HGS17-3W	FT-HGS17-5W	FT-HGS17-7W
功率 Power	3W	5W	7W
尺寸 Size(mm)	D21.5*H66	D30*H66	D35*H66
开孔 Cut out（mm）	¢ 18	¢ 25	¢ 30
输入电压 Voltage	200-240V		
光通量 Lumen	180Lm	300Lm	420Lm
光源 Chip	Osram XPE		
色温 Color temperature	2700-6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	15° /24° /36°		
功率因素 PF	0.5		
可否调光 Dim	Black /White/Gold		
防护等级 IP Rate	IP20		
认证 Certificate	CE/EMC/LVD/ROHS/SAA		
质保 Warranty	3 or 5 years warranty		





型号 Model	FT-HGS18-3W	FT-HGS18-5W	FT-HGS18-7W
功率 Power	3W	5W	7W
尺寸 Size(mm)	D23*H66	D30*H66	D35*H66
开孔 Cut out（mm）	¢ 20	¢ 25	¢ 30
输入电压 Voltage	200-240V		
光通量 Lumen	180Lm	300Lm	420Lm
光源 Chip	Osram XPE		
色温 Color temperature	Osram XPE		
显色指数 CRI	Osram XPE		
发光角度 Beam Angle	15° /24° /36°		
功率因素 PF	0.5		
可否调光 Dim	Black /White/Gold		
防护等级 IP Rate	IP20		
认证 Certificate	CE/EMC/LVD/ROHS/SAA		
质保 Warranty	3 or 5 years warranty		


GL03 系列的 LED 筒灯（圆形 / 方形 / 双头面框）
GL03（Round and frame）/Two head Series of LED Down Light





型号 Model	FT-GL03-8W	FT-GL03-10W	FT-GL03-12W	FT-GL03-15W	FT-GL03-20W	FT-GL03-25W	FT-GL03-30W	FT-GL03-35W
功率 Power	8W	10W	12W	15W	20W	25W	30W	35W
尺寸 Size(mm)	¢ 90*80	¢ 90*80	¢ 90*80	¢ 115*112	¢ 140*125	¢ 140*125	¢ 140*125	¢ 160*130
开孔 Cut out（mm）	¢ 75	¢ 75	¢ 75	¢ 100	¢ 120	¢ 120	¢ 120	¢ 145
输入电压 Voltage	200-240V							
光通量 Lumen	640-680Lm	800-850Lm	960-1020Lm	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB							
色温 Color temperature	2700-6000K							
显色指数 CRI	>80Ra or 90Ra							
发光角度 Beam Angle	15° / 24°				15° / 24° /38°			
功率因素 PF	0.5						0.95	
防护等级 IP Rate	IP40							
可否调光 Dim	Triac,0-10V,DALI							
外壳颜色 Shell color	Black /White							
认证 Certificate	CE/EMC/LVD/ROHS/SAA							
质保 Warranty	3 or 5 years warranty							





型号 Model	FT-GL03-8W	FT-GL03-10W	FT-GL03-12W	FT-GL03-15W	FT-GL03-20W	FT-GL03-25W	FT-GL03-30W	FT-GL03-35W
功率 Power	8W	10W	12W	15W	20W	25W	30W	35W
尺寸 Size(mm)	90*90*80	90*90*80	90*90*80	115*115*112	140*140*125	140*140*125	140*140*125	160*160*130
开孔 Cut out（mm）	75*75	75*75	75*75	100*100	120*120	120*120	120*120	145*145
输入电压 Voltage	200-240V							
光通量 Lumen	640-680Lm	800-850Lm	960-1020Lm	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB							
色温 Color temperature	2700-6000K							
显色指数 CRI	>80Ra or 90Ra							
发光角度 Beam Angle	15° / 24°				15° / 24° /38°			
功率因素 PF	0.5						0.95	
防护等级 IP Rate	IP40							
可否调光 Dim	Triac,0-10V,DALI							
外壳颜色 Shell color	Black /White							
认证 Certificate	CE/EMC/LVD/ROHS/SAA							
质保 Warranty	3 or 5 years warranty							






型号 Model	FT-GL03-2*8W	FT-GL03-2*10W	FT-GL03-2*12W	FT-GL03-2*15W	FT-GL03-2*20W	FT-GL03-2*25W	FT-GL03-2*30W	FT-GL03-2*35W
功率 Power	2*8W	2*10W	2*12W	2*15W	2*20W	2*25W	2*30W	2*35W
尺寸 Size(mm)	L170*W90 *H100	L170*W90 *H100	L170*W90 *H100	L210*W115 *H112	L250*W140 *H125	L250*W140 *H125	L250*W140 *H125	L303*W160 *H130
开孔 Cut out（mm）	155*75	155*75	155*75	200*100	230*120	230*120	230*120	280*145
输入电压 Voltage	200-240V	200-240V	200-240V	200-240V	200-240V	200-240V	200-240V	200-240V
光通量 Lumen	1280-1360Lm	1600-1700Lm	1920-2040Lm	2400-2550Lm	3200-3400Lm	4000-4250Lm	4800-5100Lm	5600-5950Lm
光源 Chip	Osram or Epistar COB							
色温 Color temperature	2700-6000K							
显色指数 CRI	>80Ra or 90Ra							
发光角度 Beam Angle	15° / 24°				15° / 24° /38°			
功率因素 PF	0.5						0.95	
防护等级 IP Rate	IP40							
可否调光 Dim	Triac,0-10V,DALI							
外壳颜色 Shell color	Black /White							
认证 Certificate	CE/EMC/LVD/ROHS/SAA							
质保 Warranty	3 or 5 years warranty							

GL04 系列的 LED 筒灯（圆形 / 方形 / 双头面框）
GL04（Round and frame）/Two head Series of LED Down Light






型号 Model	FT-GL04-10W	FT-GL04-15W	FT-GL04-20W	FT-GL04-25W	FT-GL04-30W	FT-GL04-35W
功率 Power	10W	15W	20W	25W	30W	35W
尺寸 Size(mm)	¢ 90*H92	¢ 115*H120	¢ 135*H140	¢ 135*H140	¢ 160*H150	¢ 160*H150
开孔 Cut out（mm）	¢ 75	¢ 95	¢ 120	¢ 120	¢ 145	¢ 145
输入电压 Voltage	200-240V					
光通量 Lumen	800-850Lm	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° / 24°	15° / 24° /36°				
功率因素 PF	0.5			0.95		
防护等级 IP Rate	IP40					
可否调光 Dim	Triac,0-10V,DALI					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					





型号 Model	FT-GL04-10W	FT-GL04-15W	FT-GL04-20W	FT-GL04-25W	FT-GL04-30W	FT-GL04-35W
功率 Power	10W	15W	20W	25W	30W	35W
尺寸 Size(mm)	L90*W90*H92	L115*W115*H120	L140*W140*H140	L140*W140*H140	L160*W160*H150	L160*W160*H150
开孔 Cut out（mm）	75*75	95*95	125*125	125*125	145*145	145*145
输入电压 Voltage	200-240V					
光通量 Lumen	800-850Lm	1200-1275lm	1600-1700Lm	2000-2125Lm	2400-2550Lm	2800-2975Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° / 24°	15° / 24° /36°				
功率因素 PF	0.5			0.95		
防护等级 IP Rate	IP40					
可否调光 Dim	Triac,0-10V,DALI					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					





型号 Model	FT-GL04-2*10W	FT-GL04-2*15W	FT-GL04-2*20W	FT-GL04-2*25W	FT-GL04-2*30W	FT-GL04-2*35W
功率 Power	2*10W	2*15W	2*20W	2*25W	2*30W	2*35W
尺寸 Size(mm)	L170*W90*H92	L210*W115*H120	L250*W140*H140	L250*W140*H140	L303*W160*H150	L303*W160*H150
开孔 Cut out（mm）	155*75	190*95	230*120	230*120	280*145	280*145
输入电压 Voltage	200-240V					
光通量 Lumen	1600-1700Lm	2400-2550Lm	3200-3400Lm	4000-4250Lm	4800-5100Lm	5600-5950Lm
光源 Chip	Osram or Epistar COB					
色温 Color temperature	2700-6000K					
显色指数 CRI	>80Ra or 90Ra					
发光角度 Beam Angle	15° / 24°	15° / 24° /36°				
功率因素 PF	0.5			0.95		
防护等级 IP Rate	IP40					
可否调光 Dim	Triac,0-10V,DALI					
外壳颜色 Shell color	Black /White					
认证 Certificate	CE/EMC/LVD/ROHS/SAA					
质保 Warranty	3 or 5 years warranty					

GL05 单头 / 双头 / 三头系列的筒灯
GL05-one/two/three head Series of LED Down Light






型号 Model	FT-GL05-7W	FT-GL05-10W	FT-GL05-12W	FT-GL05-15W
功率 Power	7W	10W	12W	15W
尺寸 Size(mm)	L100*W100*H125	L100*W100*H125	L100*W100*H125	L100*W100*H125
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	560-595Lm	800-850lm	960-1020Lm	1200-1275lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /38°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			





型号 Model	FT-GL05-2*7W	FT-GL05-2*10W	FT-GL05-2*12W	FT-GL05-2*15W
功率 Power	2*7W	2*10W	2*12W	2*15W
尺寸 Size(mm)	L200*W100*H125	L200*W100*H125	L200*W100*H125	L200*W100*H125
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	1120-1190Lm	1600-1700lm	1920-2040Lm	2400-2550Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /38°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			





型号 Model	FT-GL05-3*7W	FT-GL05-3*10W	FT-GL05-3*12W	FT-GL05-3*15W
功率 Power	3*7W	3*10W	3*12W	3*15W
尺寸 Size(mm)	L285*W100*H125	L285*W100*H125	L285*W100*H125	L285*W100*H125
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	1680-1785Lm	2400-2550Lm	2880-3060Lm	3600-3825Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /38°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

GL07 单头 / 双头 / 三头系列的筒灯
GL07-one/two/three head Series of LED Down Light





型号 Model	FT-GL07-7W	FT-GL07-12W	FT-GL07-15W	FT-GL07-20W
功率 Power	7W	12W	15W	20W
尺寸 Size(mm)	88*88*H75	88*88*H85	88*88*H102	115*115*H87
开孔 Cut out（mm)	75*75	75*75	75*75	95*95
输入电压 Voltage	200-240V			
光通量 Lumen	560-595Lm	960-1020lm	1200-1275lm	1600-1700lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /36°			
功率因素 PF	0.5			
防护等级 IP Rate	IP40			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White	Black /White	Black /White	Black /White
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			





型号 Model	FT-GL07-2*7W	FT-GL07-2*12W	FT-GL07-2*15W	FT-GL07-2*20W
功率 Power	2*7W	2*12W	2*15W	2*20W
尺寸 Size(mm)	168*88*H75	168*88*H85	168*88*H102	216*115*H87
开孔 Cut out（mm)	¢ 160*75	¢ 160*75	¢ 160*75	¢ 200*95
输入电压 Voltage	200-240V			
光通量 Lumen	1120-1190Lm	1920-2040Lm	2400-2550Lm	3200-3400Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /36°			
功率因素 PF	0.5			
防护等级 IP Rate	IP40			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White	Black /White	Black /White	Black /White
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			





型号 Model	FT-GL07-3*7W	FT-GL07-3*12W	FT-GL07-3*15W	FT-GL07-3*20W
功率 Power	3*7W	3*12W	3*15W	3*20W
尺寸 Size(mm)	247*88*H75	247*88*H85	247*88*H102	318*115*H87
开孔 Cut out（mm)	¢ 240*75	¢ 240*75	¢ 240*75	¢ 300*95
输入电压 Voltage	200-240V			
光通量 Lumen	1680-1785Lm	2880-3060Lm	3600-3825Lm	4800-5100Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /36°			
功率因素 PF	0.5			
防护等级 IP Rate	IP40			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White	Black /White	Black /White	Black /White
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

GL08 单头 / 双头 / 三头系列的筒灯
GL08-one/two/three head Series of LED Down Light





型号 Model	FT-GL08-7W	FT-GL08-10W	FT-GL08-12W	FT-GL08-15W
功率 Power	7W	10W	12W	15W
尺寸 Size(mm)	105*105*130			
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	560-595Lm	800-850lm	960-1020Lm	1200-1275lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	8° /15° /24° /38° /55°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

型号 Model	FT-GL08-2*7W	FT-GL08-2*10W	FT-GL08-2*12W	FT-GL08-2*15W
功率 Power	2*7W	2*10W	2*12W	2*15W
尺寸 Size(mm)	200*105*130			
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	1120-1190Lm	1600-1700lm	1920-2040Lm	2400-2550Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	8° /15° /24° /38° /55°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

型号 Model	FT-GL08-3*7W	FT-GL08-3*10W	FT-GL08-3*12W	FT-GL08-3*15W
功率 Power	3*7W	3*10W	3*12W	3*15W
尺寸 Size(mm)	295*105*130			
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	1680-1785Lm	2400-2550Lm	2880-3060Lm	3600-3825Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	8° /15° /24° /38° /55°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

GL02/GL07 四头 /GL08 四头系列的筒灯
GL02/GL07 four head/GL08 four head series Down Light





型号 Model	FT-GL02-20W	FT-GL02-25W	FT-GL02-30W	FT-GL02-35W	FT-GL02-40W
功率 Power	20W	25W	30W	35W	40W
尺寸 Size(mm)	D90*H95	D90*H95	D105*H115	D105*H115	D135*H140
开孔 Cut out（mm)	¢ 80	¢ 80	¢ 95	¢ 95	¢ 115
输入电压 Voltage	200-240V				
光通量 Lumen	3600-3825Lm	4800-5100lm	6000-6375Lm	7200-7650Lm	8400-8925Lm
光源 Chip	Osram or Epistar COB				
色温 Color temperature	2700-6000K				
显色指数 CRI	>80Ra or 90Ra				
发光角度 Beam Angle	15° /24° /36° /60°				
功率因素 PF	0.5				
防护等级 IP Rate	IP40				
可否调光 Dim	Triac,0-10V,DALI				
外壳颜色 Shell color	Black /White				
认证 Certificate	CE/EMC/LVD/ROHS/SAA				
质保 Warranty	3 or 5 years warranty				



型号 Model	FT-GL07-4*7W	FT-GL07-4*12W	FT-GL07-4*15W	FT-GL07-4*20W
功率 Power	4*7W	4*12W	4*15W	4*20W
尺寸 Size(mm)	168*168*H70	168*168*H85	168*168*H102	216*216*H87
开孔 Cut out（mm)	¢ 160*160			¢ 200*200
输入电压 Voltage	200-240V			
光通量 Lumen	2240-2380Lm	3840-4080Lm	4800-5100Lm	6400-6800Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	15° / 24° /36°			
功率因素 PF	0.5			
防护等级 IP Rate	IP40			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			


型号 Model	FT-GL08-4*7W	FT-GL08-4*10W	FT-GL08-4*12W	FT-GL08-4*15W
功率 Power	4*7W	4*10W	4*12W	4*15W
尺寸 Size(mm)	200*200*130			
开孔 Cut out（mm)	Surface mounted			
输入电压 Voltage	200-240V			
光通量 Lumen	1680-1785Lm	3200-3400Lm	3840-4080Lm	4800-5100Lm
光源 Chip	Osram or Epistar COB			
色温 Color temperature	2700-6000K			
显色指数 CRI	>80Ra or 90Ra			
发光角度 Beam Angle	8° /15° /24° /38° /55°			
功率因素 PF	0.5			
防护等级 IP Rate	IP20			
可否调光 Dim	Triac,0-10V,DALI			
外壳颜色 Shell color	Black /White			
认证 Certificate	CE/EMC/LVD/ROHS/SAA			
质保 Warranty	3 or 5 years warranty			

FT-LL1 | series
Linear Light

20W/25W/35W/40W/45W/50W/55W

FEATURES

- Surface-mounted or suspended options
- Customizable sizing (e.g., 1ft/2ft/4ft)
- ⩾ 80/90 CRI for accurate color rendering
- 50,000-Hour Lifespan: L70 @ Ta=25° C
- Global commercial warranty support
- PMMA/PC cover with glare-free light distribution

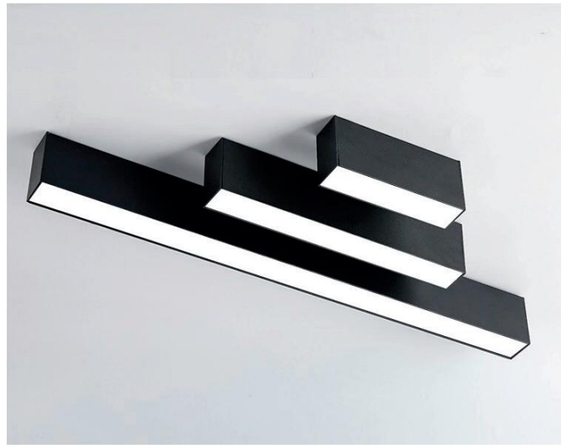

Finish: Sand White Sand Sliver Sand Black



Finish: White Black

产品应用
Product application



更多图片
More pictures







规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate	外壳颜色 Shell color
FT-LL1F2-20W	20W	600*50*70	200-240V	1600-1700lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.5	Triac,0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F2-25W	25W	600*50*70	200-240V	2000-2125lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	Triac,0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F4-35W	35W	1200*50*70	200-240V	2800-2975 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	Triac,0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F4-40W	40W	1200*50*70	200-240V	3200-3400lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	Triac,0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F4-45W	45W	1200*50*70	200-240V	3600-3825 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F4-50W	50W	1200*50*70	200-240V	4000-4250 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F5-50W	50W	1500*50*70	200-240V	4000-4250 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	0-10V,DALI	IP40	Black /White/Silvery
FT-LL1F5-55W	55W	1500*50*70	200-240V	4400-4675 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	0-10V,DALI	IP40	Black /White/Silvery

FT-LL1 | series
Linear Track Light

10W/12W/15W/20W/25W/35W/40W
/45W/50W

FEATURES

- Flicker-Free Operation
- Wide Voltage Compatibility
- Certified Safety & Compliance
- Uniform illumination with minimal glare (UGR <19)
- Available in 3 practical sizes: 0.3m, 0.6m, and 1.2m
- Allows for effortless mounting and repositioning on track







Finish: Sand White Sand Sliver Sand Black



产品应用
Product application



更多图片
More pictures







规格参数
Product Specifications

型号 Model	功率 Power	尺寸 Size(mm)	输入电压 Voltage	光通量 Lumen	光源 Chip	色温 Color temperature	显色指数 CRI	发光角度 Beam Angle	功率因素 PF	可否调光 Dim	防护等级 IP Rate	外壳颜色 Shell color
FT-LL1F1-10W	10W	300*50*50	200-240V	800-850lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.5	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F1-12W	12W	300*50*50	200-240V	960-1020Lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.5	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F1-15W	15W	300*50*50	200-240V	1200-1275lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.5	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F2-20W	20W	600*50*50	200-240V	1600-1700lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.5	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F2-25W	25W	600*50*50	200-240V	2000-2125lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F4-35W	35W	1200*50*50	200-240V	2800-2975 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	Triac	2/3/4-phase	Black /White/Silvery
FT-LL1F4-40W	40W	1200*50*50	200-240V	3200-3400lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	/	2/3/4-phase	Black /White/Silvery
FT-LL1F4-45W	45W	1200*50*50	200-240V	3600-3825 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	/	2/3/4-phase	Black /White/Silvery
FT-LL1F4-50W	50W	1200*50*50	200-240V	4000-4250 lm	SAN' an	3000K/ 4000K/ 6000K	>80Ra or 90Ra	140°	0.95	/	2/3/4-phase	Black /White/Silvery

FEITL

Dongguan Fitlight Lighting Co.,Ltd.

LL2 系列的嵌入式线条灯 /LL3 系列的无缝拼接线条灯

LL2 Embedded linear light/LL3 Seamless Splicing linear light





Finish:

Sand White Sand Sliver Sand Black

型号 Model	FT-LL2F1-10W	FT-LL2F1-20W	FT-LL2F1-30W
功率 Power	10W	20W	30W
尺寸 Size(mm)	L148*W46*H37.5	L280*W46*H37.5	L414*W46*H37.5
开孔 Cut out（mm)	L145*W35	L275*W35	L410*W35
输入电压 Voltage	200-240V		
光通量 Lumen	800-850lm	1600-1700Lm	2400-2550Lm
光源 Chip	OSRAM		
色温 Color temperature	2700-5000K		
显色指数 CRI	>80Ra or 90Ra		
发光角度 Beam Angle	140°		
功率因素 PF	0.5		0.95
可否调光 Dim	Triac,0-10V,DALI		
外壳颜色 Shell color	Black /White/Silvery		
认证 Certificate	CE/EMC/LVD/ROHS/SAA		
质保 Warranty	3 or 5 years warranty		

MAGNETIC SERIES

Splicing style





Finish:

Sand White Sand Sliver Sand Black

型号 Model	FT-LL3F2-20W	FT-LL3F2-25W	FT-LL3F2-30W	FT-LL3F4-40W	FT-LL3F4-45W	FT-LL3F4-50W	FT-LL3F4-60W
功率 Power	20W	25W	30W	40W	45W	50W	60W
尺寸 Size(mm)	600*50*70	600*50*70	600*50*70	1200*50*70	1200*50*70	1200*50*70	1200*50*70
输入电压 Voltage	200-240V						
光通量 Lumen	1800Lm	2250Lm	2700Lm	3600Lm	4050Lm	4500Lm	5400Lm
光源 Chip	SAN' an						
色温 Color temperature	2700-5000K						
显色指数 CRI	>80Ra or 90Ra						
发光角度 Beam Angle	140°						
功率因素 PF	0.5	0.95					
可否调光 Dim	Triac,0-10V,DALI			0-10V,DALI			
防护等级 IP Rate	IP20						
外壳颜色 Shell color	Black /White						
认证 Certificate	CE/EMC/LVD/ROHS/SAA						
质保 Warranty	3 or 5 years warranty						



2.0 MAGNETIC TRACK LIGHT

2.0 磁吸泛光灯 / 格栅灯 / 折叠格栅灯系列
2.0 Magnetic Flood Light/Grille Light/Folding Grille Light



型号 Model	FT-20F30-10W	FT-20F60-20W	FT-20F90-30W
功率 Power	10W	20W	30W
尺寸 Size(mm)	L307*W22*H25	L607*W22*H25	L907*W22*H25
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	120°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		



型号 Model	FT-20S6T-6W	FT-20S12T-12W	FT-20S18T-18W	FT-20S24T-24W
功率 Power	6W	12W	18W	24W
尺寸 Size(mm)	L115*W22*H25	L223*W22*H25	L331*W22*H25	L439*W22*H25
驱动 Driver	48V			
光源 Chip	OSRAM			
色温 Color temperature	3000K/ 4000K/ 6000K			
显色指数 CRI	>90Ra			
发光角度 Beam Angle	24°			
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）			
质保 Warranty	5 years			



型号 Model	FT-20SR6T-6W	FT-20SR12T-12W	FT-20SR18T-18W
功率 Power	6W	12W	18W
尺寸 Size(mm)	L113*W22*H82	L226*W22*H82	L334*W22*H82
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		

2.0 磁吸旋转格栅灯 / 轨道灯 / 吊线灯系列
2.0 Magnetic Folding Grille Light/Track Light/Pendant Light



型号 Model	FT-20SR6T-6W	FT-20SR12T-12W	FT-20SR18T-18W
功率 Power	6W	12W	18W
尺寸 Size(mm)	L123*W33.6*H75	L231*W33.6*H75	L339*W33.6*H75
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		



型号 Model	FT-20T-5W	FT-20T-10W	FT-20T-18W	FT-20T-20W
功率 Power	5W	10W	18W	20W
尺寸 Size(mm)	Ø35*H80	Ø45*H100	Ø55*H109	Ø65*H120
驱动 Driver	48V			
光源 Chip	OSRAM			
色温 Color temperature	3000K/ 4000K/ 6000K			
显色指数 CRI	>90Ra			
发光角度 Beam Angle	24°			
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）			
质保 Warranty	5 years			



型号 Model	FT-20D30-6W	FT-20D40-10W	FT-20D55-12W
功率 Power	6W	10W	12W
尺寸 Size(mm)	ф30*L300	ф40*L300	ф60*L300
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		


Connection module 连接模块


2.0 -明装轨道条
2.0 Surfact rail


2.0 -暗装轨道条
2.0 Recessed rail


2.0 -批灰轨道条
2.0 Recessed rail



2.0 -明装水平转角
2.0 90° Surface corner



2.0 -明装阴角（Yin）
2.0 Surface Yin corner


2.0 -暗装水平转角
2.0 Recessed corner


2.0-暗装阴角（Yin）
2.0 Recessed Yin corner


2.0 -暗装阳角（Yang）
2.0 Recessed Yang corner


2.0-暗装T字型
2.0 Recessed T corner


2.0 -暗装十字型
2.0 Recessed ＋ corner



2.0 -批灰水平转角
2.0 Recessed corner


2.0-批灰阴角（Yin）
2.0 Recessed Yin corner


2.0-批灰阳角（Yang）
2.0 Recessed Yang corner


2.0-批灰T字型
2.0 Recessed T corner


2.0 -批灰十字型
2.0 Recessed ＋ corner


2.0 -明装T字型
2.0 Surface T corner



2.0-明装十字型
2.0 Surface ＋ corner



2.0-输入模块
2.0 Through conductive


2.0-转角连接
2.0 Corner conductive


2.0 -直接连接
2.0 Input conductive

CONNECTION MODE 连接方式

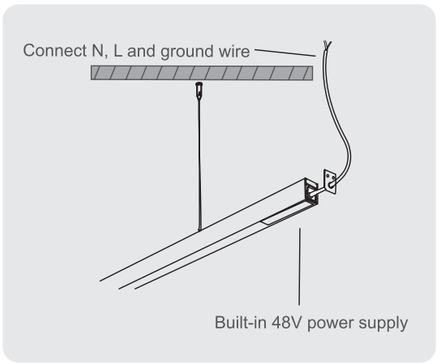

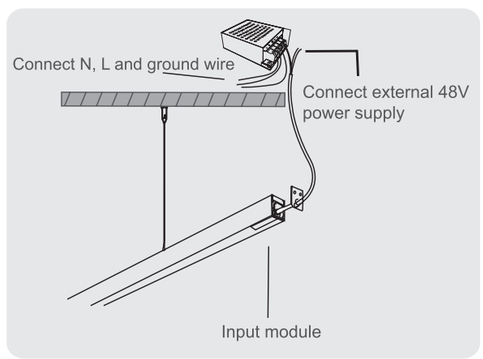



FEITL Dongguan Fitlight Lighting Co.,Ltd.



型号 Model	FT-20F26-6W	FT-20F26-12W	FT-20F26-18W
功率 Power	6W	12W	18W
尺寸 Size(mm)	121*25.6*30.5	237*25.6*30.5	353*25.6*30.5
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	120°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		



型号 Model	FT-20S26-6W	FT-20S26-12W	FT-20S26-18W
功率 Power	6W	12W	18W
尺寸 Size(mm)	121*25.6*30.5	237*25.6*30.5	353*25.6*30.5
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		



型号 Model	FT-20SR26-6W	FT-20SR26-12W	FT-20SR26-18W
功率 Power	6W	12W	18W
尺寸 Size(mm)	127*33.6*59.2	235.5*33.6*59.5	343*33.6*59.2
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		



型号 Model	FT-20T26-6W	FT-20T26-10W	FT-20T26-18W	FT-20T26-20W
功率 Power	5W	10W	18W	20W
尺寸 Size(mm)	Ø35*H80	Ø45*H100	Ø55*H109	Ø65*H120
驱动 Driver	48V			
光源 Chip	OSRAM			
色温 Color temperature	3000K/ 4000K/ 6000K			
显色指数 CRI	>90Ra			
发光角度 Beam Angle	24°			
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）			
质保 Warranty	5 years			




型号 Model	FT-20D26-6W	FT-20D26-10W	FT-20D26-12W
功率 Power	6W	10W	12W
尺寸 Size(mm)	ϕ30*L300	ϕ40*L300	ϕ60*L300
驱动 Driver	48V		
光源 Chip	OSRAM		
色温 Color temperature	3000K/ 4000K/ 6000K		
显色指数 CRI	>90Ra		
发光角度 Beam Angle	24°		
可否调光 Dim	0-10V/ Dali/Tuya（Blutooth/ Zigbee）		
质保 Warranty	5 years		

MAGNETIC SERIES




8W Magnetic downlight 24°

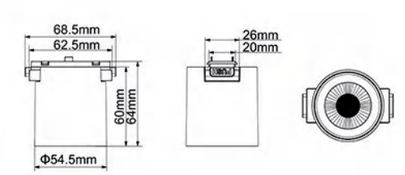




15W circle complementary lighting 120°

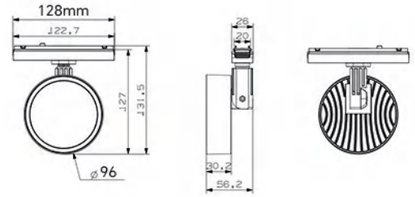




15W Square spotlight 24°

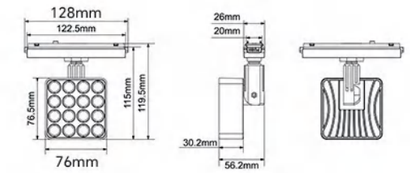




15W Circular spotlight 24°

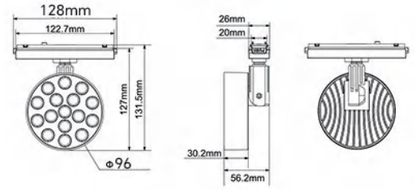



15W Rectangular spotlight 24°

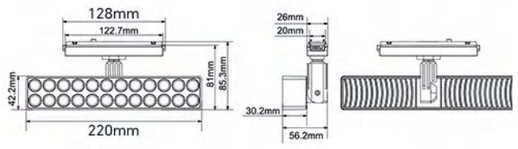

Accessories



I Connector　T Connector　L Connector　X Connector　End Cap　Maanetic　External power　Vertical corner

MAGNETIC SERIES