


CAD FILE:

PIN	ø2.0	ø2.5
APPD.	√	

SCHEMATIC

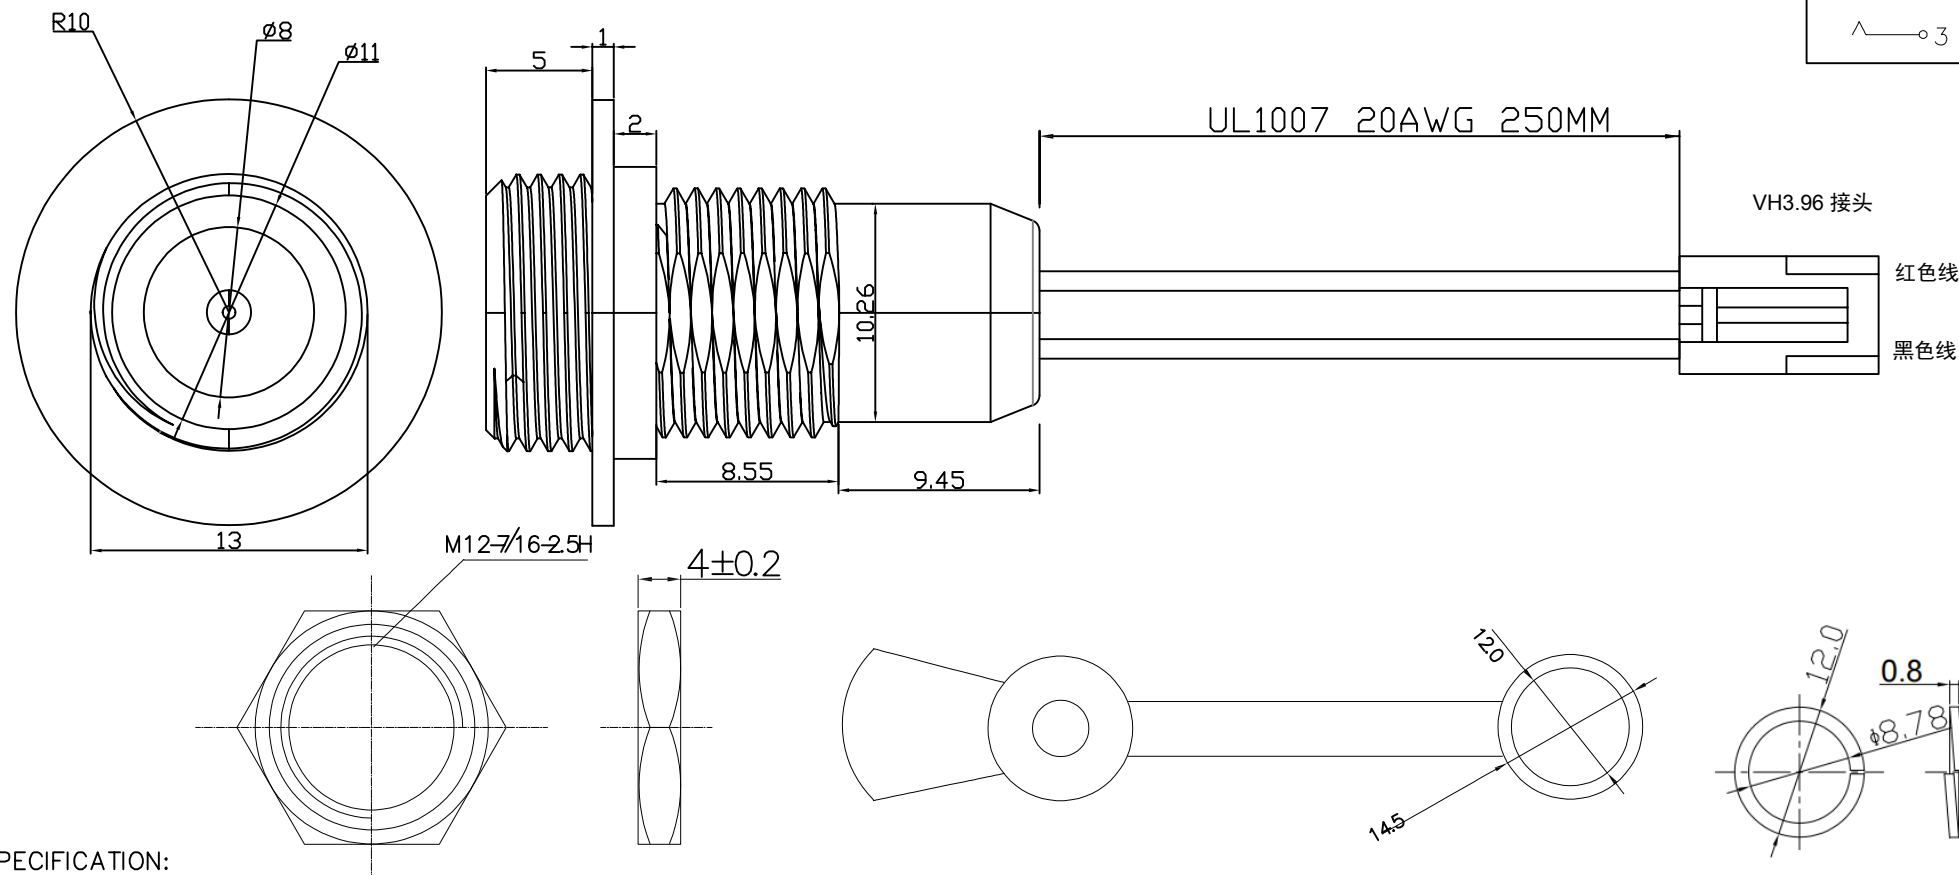

SPECIFICATION:

- 1.Rating DC 50V 10.0A;
- 2.Contact resistance $\leq 0.03\Omega$;
- 3.Insulation resistance 100M Ω (DC250V);
- 4.Withstand voltage 500VAC ;
- 5.Insertion and extraction force 3-20N;
- 6.life test 5,000 cycles。

8					TOLERANCE UNLESS SPECIFIED				
7	WIRE	1007-22AWG	—	RED/BLACK					
6	CAP	SILICONE	1	BLACK	WITHIN 1.5: $\pm 0.1\text{mm}$ OVER 1.5: $\pm 0.2\text{mm}$ ANGLES: $\pm 2^\circ$				
5	OUT-SHELL	PVC-25P	1	BLACK	ISSUE	DATE	DESCRIPTIONS		APPD.
4	PIN	H59 BRASS	1	NI PLATED	TITLE: DC JACK		UNIT:mm	DRWG. NO.:	
3	SPRING	BRASS	1	NI PLATED	MODEL NO: DC-022XA-100720AWG-250MM-VH396		SCALE:4:1	DWN	
2	FLAT PIECE	H62 BRASS	1	NI PLATED				CHK'D	
1	INSIDE-HOUSING	PBT	1		XIAMEN JNBEILI ELECTRONICS CO.,LTD			APPD.	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING					