Power Splitter

950X015X

- ***Wide-band design, cover 340-3800MHz***
- ***Low PIM < -160dBc***
- ***Compact size and light weight***
- ***Easy to be installed***
- ***Suitable for indoor and outdoor applications***
- ***Square tube***

Technical Data

Electrical Specifications

Type No.	PIM3 (@2x43 dBm Carrier) (dBc)	≤-150	95020153	95030153	95040153
		≤-155	95020155	95030155	95040155
		≤-160	95020157	95030157	95040157
Frequency Range (MHz)			340-3800		
For connecting...antennas			2 Way	3 Way	4 Way
Distribution Loss(dB)			3.0	4.8	6.0
Insertion Loss (dB)			≤0.3	≤0.6	≤0.6
Return Loss (dB)			≥19@340-2700&≥18@3400-3800		
Input Power (W)			≤500		
Peak Power (W)			≤2000		
Impedance (Ω)			50		

Mechanical Specifications

Dimensions, HxWxD (excluding connectors and mounting bracket) (mm)	249x25x25	272.5x25x25	294.9x25x25
Weight (including connectors and mounting bracket) (kg)	0.57	0.63	0.76
Packing Size(mm)	290x85x50	335x85x50	355x85x65
Connector Type	7-16 Female (Twist head)		
Color	Light Gray (Customized)		
Mounting	Wall Mounted		

Environmental Specifications

Operational Temperature (°C)	-25 to +65
Operational Humidity (%)	≤95
Ingress Protection Class	IP65 (Indoor and Outdoor)

Accessories (order separately)

Type No.	Description
30505.0043051	Bracket
50501.0330100	Screw

Outline Drawing

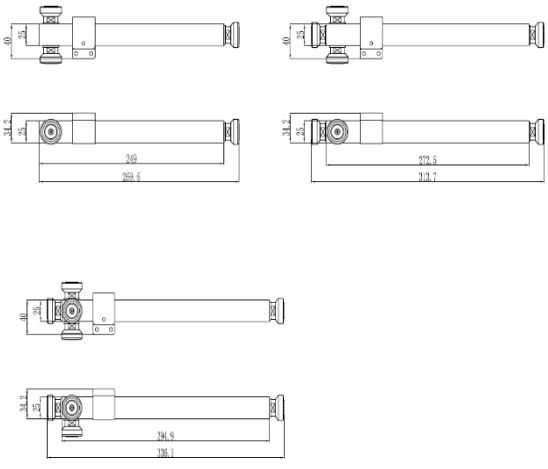

@2024 HILINKS TECHNOLOGY CO., LTD V 1.0 All Rights Reserved. Any Previous Datasheet Issued Become Invalid. www.hilinkstech.com