

Terminal Load

954XX1X7V31

HILINKS

- *Frequency Range DC-6000 MHz*
- *Low PIM < -160dBc*
- *High reliability*
- *Suitable for indoor and outdoor applications*
- *Wall mounting*

Technical Data

Electrical Specifications

Type No.	N Female	95444137V31
	N Male	95444147V31
	4.3-10 Female	95444157V31
	4.3-10 Male	95444167V31
	7-16 Female	95444177V31
	7-16 Male	95444187V31
Input Power (W)	25	
Frequency Range (MHz)	DC-6000	
Return Loss (dB)	≤-19@340-3800, ≤-18@3800-6000	
Intermodulation (3rd order, dBc)	≤-160@2x37dBm	
Impedance (Ω)	50	


Mechanical Specifications

Dimensions, HxWxD (excluding connectors and mounting bracket) (mm)	176x145x47.5	
Weight (including connectors and mounting bracket) (kg)	N Female/ Male	1.9
	4.3-10 Female/ Male	1.9
	7-16 Female/ Male	2.0
Packing Size(mm)	280x215x125	
Color	Light Gray (Customized)	
Mounting	Wall mounting	

Environmental Specifications

Operational Temperature (°C)	-40 to +65
Operational Humidity (%)	≤95
Ingress Protection Class	IP65 (Indoor and Outdoor)

Outline Drawing

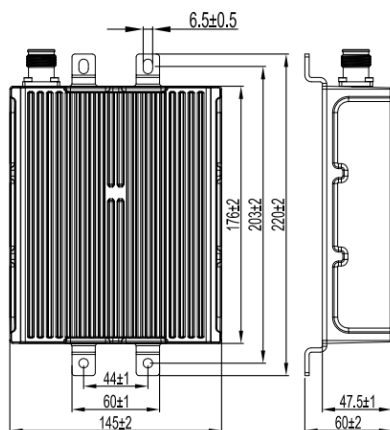

25W

