


KING KONG NR SERIES SOLAR PANELS

GSMO-NBEF70-20A

70W20V

Grade A high-efficiency
monocrystalline silicon
laminated solar panel

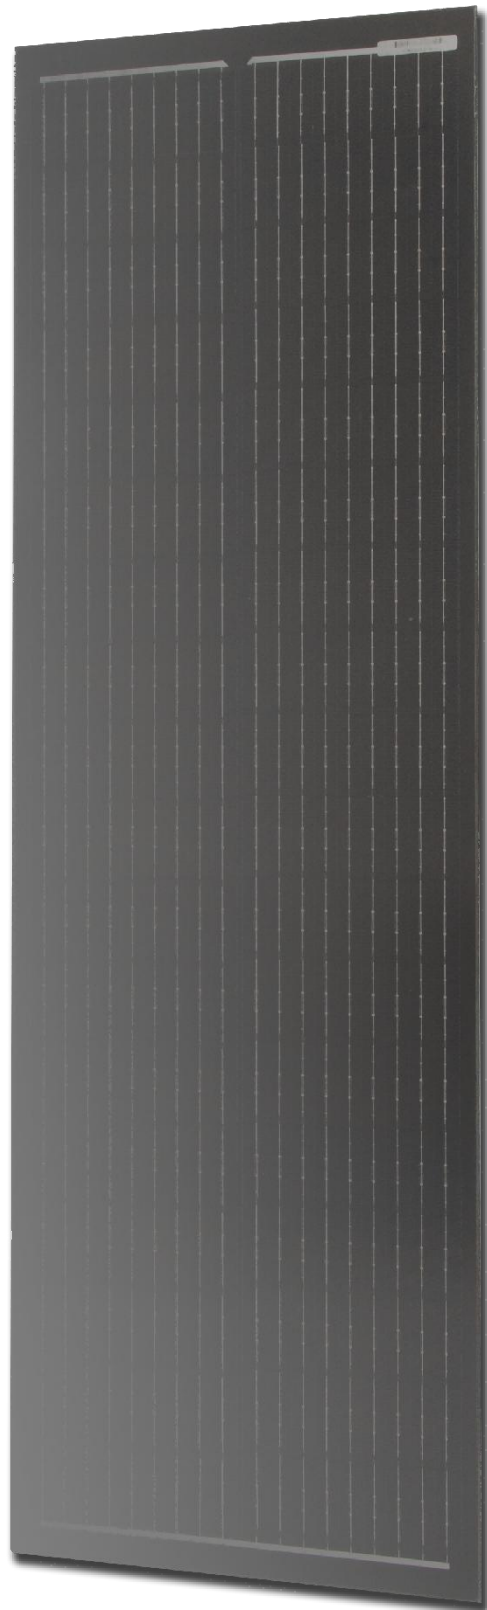

XI'AN GO SOLARV NEW ENERGY
TECHNOLOGY CO., LTD.

Committed to diverse applications of PV




GSMO-NBEF70-20A

70W20V

PERC

The Kingkong NR Series modules are standard monocrystalline solar panels, integrating high-efficiency PERC monocrystalline cells with a conversion efficiency of over 23%. Encapsulated in 3.2mm ultra-clear tempered glass, these panels benefit from a mature manufacturing process, ensuring stable power output and exceptional durability. Under standard test conditions (STC), the power retention rate is guaranteed to be $\geq 90\%$ after 10 years and $\geq 80\%$ after 20 years.

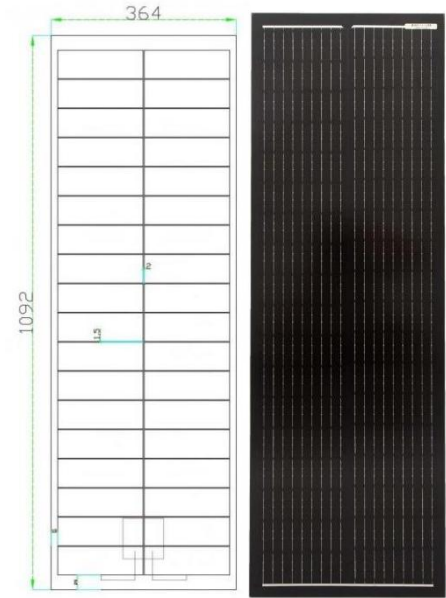

MECHANICAL PARAMETERS

Cells configuration	2×18
Junction box	Single-cell junction box, One diode
Output Cables	Customized according to requirements
Glass Type	3.2mm Tempering、Ultra white
Frame	No frame
Net weight	3.45Kg
Size	1092*346*5mm

ELECTRICAL PERFORMANCE PARAMETERS

Cell type	PERC Monocrystalline
Model	GSMO-NBEF70-20A
Standard power	70W
Peak voltage (Vmp)	22.69V
Peak Current (Imp)	3.18A
Open Circuit Voltage	26.74V
Short Circuit Current	3.38A
Test standards	STC : AM1.5 1000W/m ² 25°C

WORKING PARAMETERS

OTR	- 40°C — +80°C
Power Tolerance	±2%
System Voltage	DC1000V
Maximum fuse rating	10A
Nominal temperature	45±2°C
Safety Class	Class II
Fire resistance rating	Class C

LOAD CAPACITY

Front static load	3600Pa
Rear static load	2400Pa
Hail Impact test	Diameter: 25mm, Impact speed: 23m/s

TEMPERATURE COEFFICIENT

TC Power	- 0.30%/°C
TC Voltage	- 0.28%/°C
TC Current	+0.05%/°C



All data contained in this specification are subject to change without further notice.