

# Standable Battery

## 24V 200AH

### Technology

Lithium Iron Phosphate (LiFePO4)	
Nominal Voltage	25.6V
Rated Capacity	200Ah
Charge Method	CC/CV
Charge Voltage	29.2V
Bulk/Absorption Voltage	29.2V
BMS Balancing Voltage	Any cell voltage $\geq 3.45V$ Max Voltage difference between cells $> 30mV$ In Charging
Equalize Voltage	Not applicable
Float Voltage *	Not applicable
Temperature Compensation	No/Disable
Charge Cut-off Voltage	29.2V
Discharge Cut-off Voltage	20V
Recommended Charge Current	100A
Recommended Discharge Current	100A
Maximum Continuous Charge Current	200A
Maximum Continuous Discharge Current	200A
Peak Current	210A/1s
WiFi	Yes
Bluetooth	Yes
Communication	CAN/RS485/RS232
Self Heating	No
Protection Rating	IP30
BMS Protection	<ul style="list-style-type: none"> <li>Over and Low voltage</li> <li>Charge and Discharge Over current</li> <li>Short circuit</li> <li>High and Low temperature</li> </ul>
Internal Resistance	$\leq 15m\Omega$
BMS Leakage Current	$\leq 10mA$
Charge Temperature Range	32°F (0°C) to 131°F (55°C)
Discharge Temperature Range	-4°F (-20°C) to 131°F (55°C)
Storage Temperature 1 week	-4°F (-20°C) to 149°F (65°C)
Storage Temperature 1 month	-4°F (-20°C) to 113°F (40°C)
Storage Temperature 1 year	-4°F (-20°C) to 77°F (25°C)
Humidity Operating:	5% to 90 % RH
Humidity Storage:	35% to 85% RH
Certifications: MSDS; UN38.3; CE; PSE	
Cycle Life	6000 cycles

## FEATURES:

- BMS Protection**  
 Overcharge/Over-discharge Protection, Charge/Discharge Over-current Protection, Short-Circuit Protection, Battery Voltage Self-Balancing, High and Low Discharge Cut-off.
- Long Lifespan**  
 Can be cycled up to 6000 times, with a lifespan of up to 20 years.
- Multi-Brand Compatibility**  
 Compatible with multiple inverter protocols from various brands, supports CAN/RS485 for seamless communication with popular solar inverters.
- More secure and efficient**  
 Each battery has two pairs terminals for positive and negative poles, allow more connections to improve the conductive efficiency and safety.
- Smart Monitoring**  
 Easily monitor your battery's status through the mobile app, which supports both Bluetooth and WiFi connections. Stay informed on your battery's health and performance in real-time.
- Easy to Install and fix**  
 There are sturdy handles on both sides of the top of the battery, which supports lifting by ropes, and the bottom is equipped with bracket for easy mounting.
- Capacity Expansion**  
 Up to 15 units can be connected in parallel, expandable to 76.8kWh.

Max Connected  
IN Parallel  
**15 Units**

Max Connected  
IN Series  
**1 Units**

# Unit Dimensions







## Mechanical

Length	17.72in / 450mm
Width	8.54in / 217mm
Height	22.83in / 580mm
Weight	116.84lbs / 53kg
Terminals	M8 insert

## Materials

Case and Cover	METAL
Color	WHITE

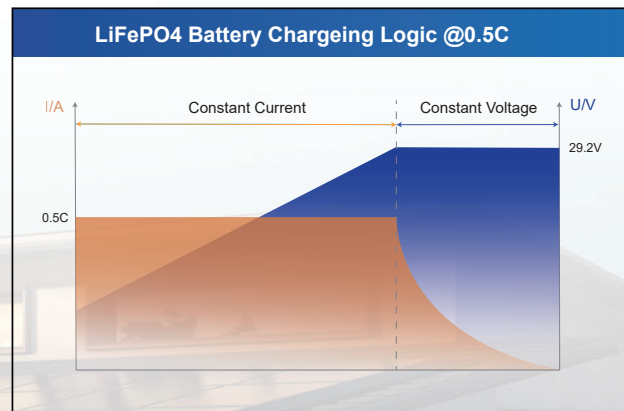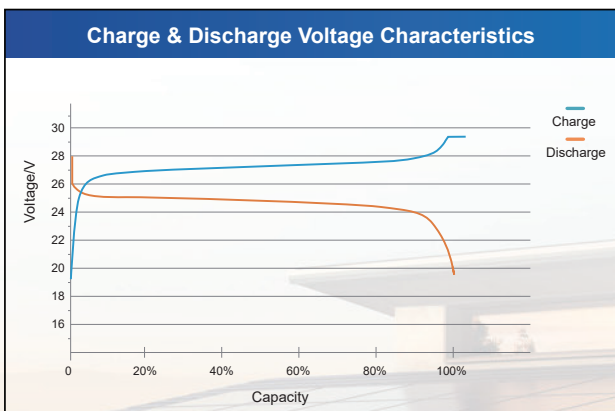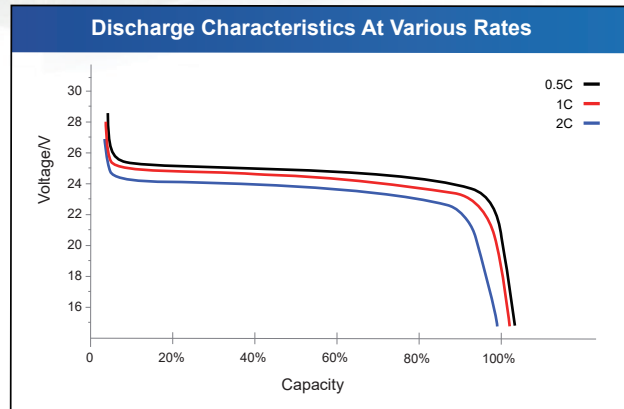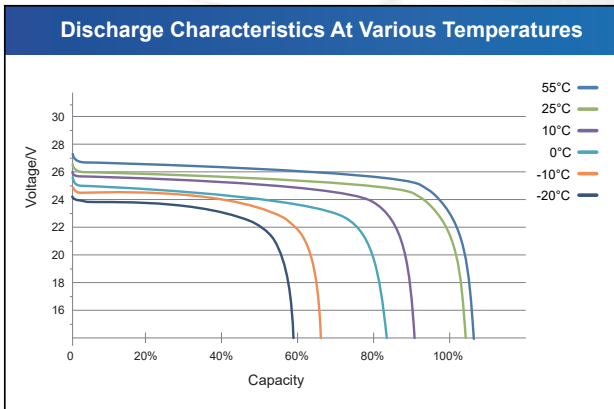

## PLEASE NOTE

- ★ Lithium batteries ship under Class 9 Dangerous Goods PI 965 Section IA. Please contact your carrier company to determine their requirements for shipping. MSDS Sheets are available upon request.
- ★ Float charging is not applicable to lithium iron phosphate batteries, long-term float charging will accelerate battery aging or damage. If you have to set the float voltage for MPPT/PWM charge controller in solar system, we suggest to set it to (12V Battery)13.2V-13.6V, (24V Battery)26.4V-27.2V, (36V Battery)39.6V-40.8V, (48V Battery)52.8V-54.4V.