
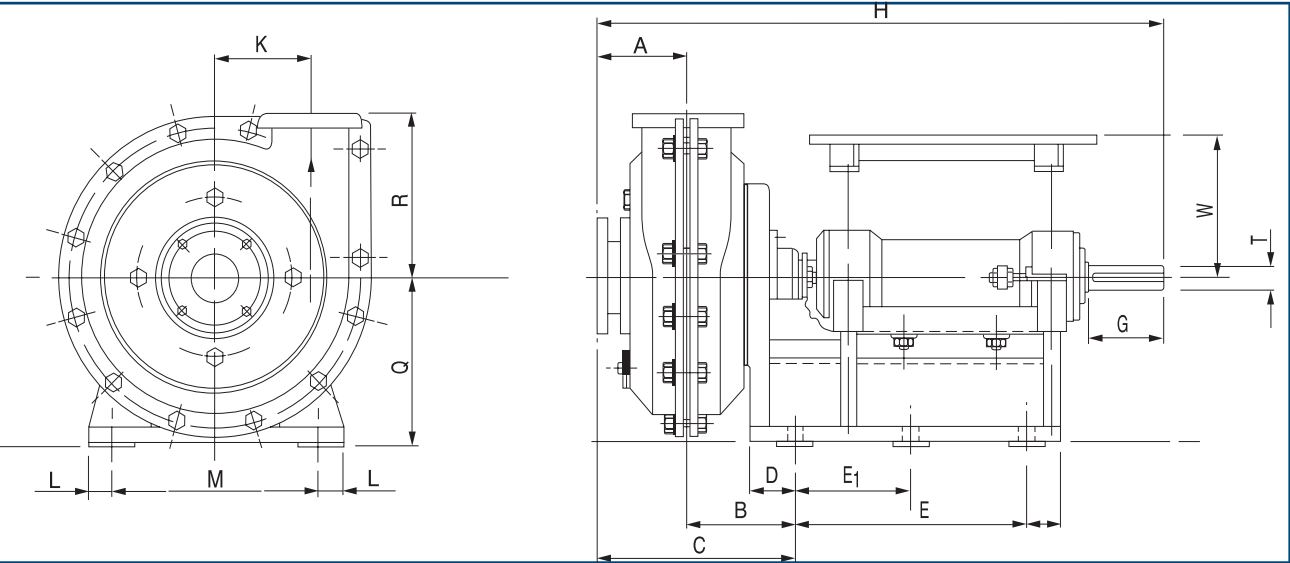
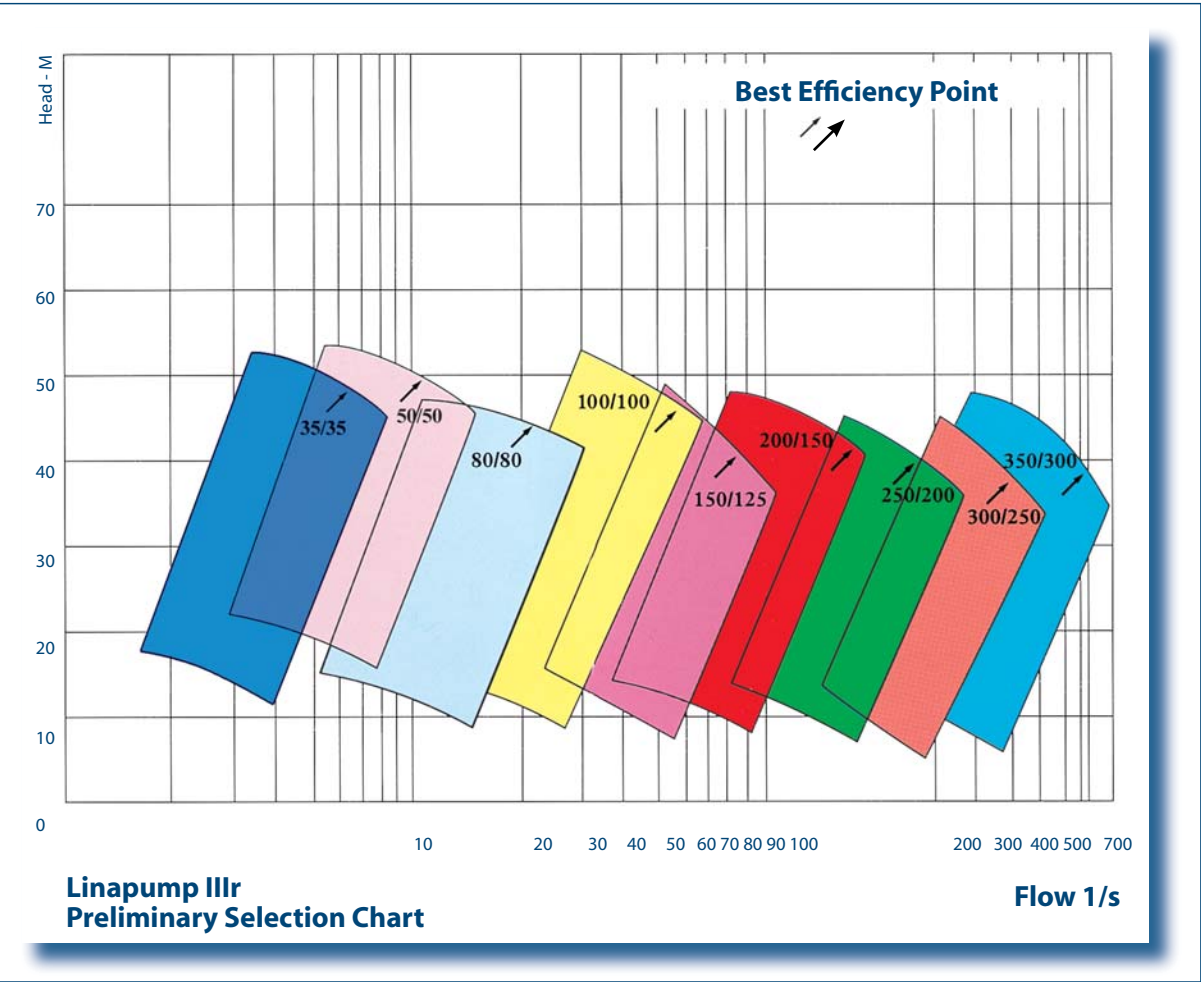


Design Specifications and Options

Linapump IIIr standard casing is designed for a maximum working pressure of 10 bar. Higher pressure casings are available for series pumping. Please contact Linatex for higher pressure applications.

Suction and discharge flanges are universal and available in metric BS4504 and ASA150 drilling patterns as standard. Other drilling patterns are available to order. Orientation of discharge to 4 positions according to installation requirements.

The Linapump IIIr range of pumps is designed and manufactured in accordance with appropriate International Quality Standards, such as ISO9000.

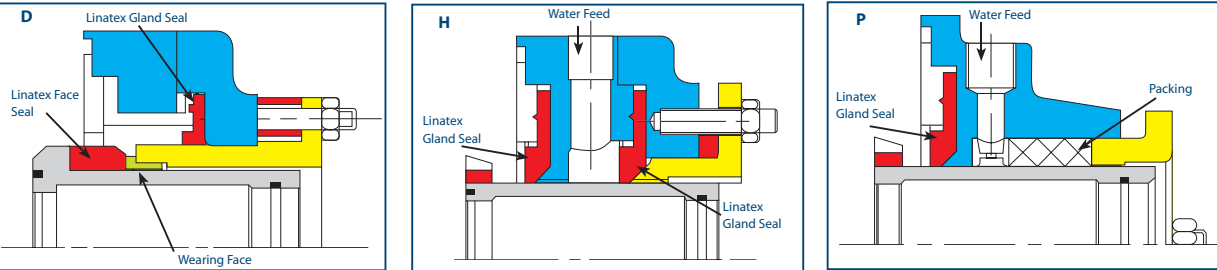

PUMP SIZE (mm)	MASS (kg)	Dimensions in mm																
		A	B	C	D	E	E1	F	G	H	K	L	M	Q	R	T	W	W
35 x 35	142	87	137	224	49.5	310	-	46	70	725	111	20	285	250	216	40	165	220
50 x 50	156	92.5	132	224.5	49.5	310	-	46	70	725	120.5	20	285	250	241	40	165	220
80 x 80	326	120	180	300	65	355	-	50	120	915	168	30	360	300	295	45	250	310
100 x 100	440	132	169	301	57	460	-	40	127	998.5	184	30	400	336	324	60	272	372
150 x 125	608	211	234	445	100	479	-	100	189	1286	210	30	480	390	368	65	340	440
200 x 150	736	217.5	223	440.5	90	468	-	66	174	1312.5	222	35	490	428	394	70	345	445
250 x 200	1250	309	270	579	108	660	330	76	200	1600	321	40	660	550	406	90	430	585
300 x 250	1956	317.5	285	602.5	70	640	320	70	200	1697.5	368	40	750	600	483	100	-	-
350 x 300	-	322	329	651	90	660	330	93	230	1752	441	40	770	650	560	110	-	-