

LDBJ9-40.5 型电流互感器

LDBJ9-40.5 type current transformer


概述 Summarize

LZZBJ9-40.5 型电流互感器适用于额定频率为 50Hz 或 60Hz、额定电压为 40.5kV 的电力系统中，作电能计量、电流测量和继电保护用。
产品执行标准为 GB20840.1-2010、GB20840.2-2014。

The LZZBJ9-40.5 type current transformer is suitable for power systems with a rated frequency of 50Hz or 60Hz and a rated voltage of 40.5kV, and is used for electric energy metering, current measurement and relay protection.
The product execution standards are GB20840.1-2010 and GB20840.2-2014.



型号及其含义 Model and its meaning

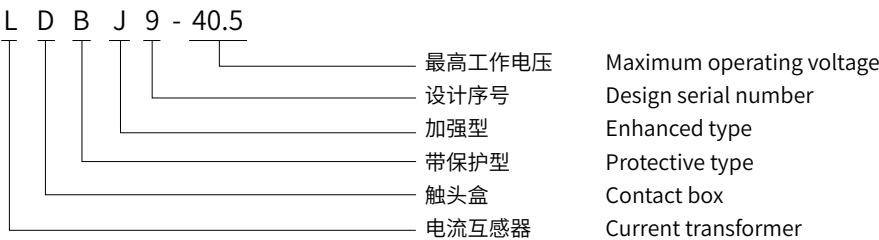

正常使用条件 Normal service condition

- 安装场所：户内。
- 环境温度：最高 40℃；最低 -5℃；
- 日平均气温不超过 30℃。大气条件：大气中无严重污秽。
- Installation site: Indoor.
- Ambient temperature: Up to 40℃ Minimum temperature: -5℃
- The daily average temperature does not exceed 30℃ . Atmospheric conditions: There is no severe pollution in the atmosphere.

技术参数 Technical parameters

产品型号 Product model	额定一次电流 Rated primary current (A)	准确级组合 Accuracy level combination	额定二次输出 Rated secondary output (VA)				一秒 热稳定电流 One-second thermal stabilization current	额定 动稳定电流 Rated dynamic stable current
			0.2S	0.2	0.5	5P10		
LDBJ9-40.5	20-300	0.2(S)/5P10 0.5(S)/5P10	10	10	20	30	150lin	375lin
	400					40	54	120
	500					63	130	
	600-800							
	1000-1500		15	30	50	80	130	
	2000-3000					100	160	

外形图及安装尺寸 Outline and mounting dimensions

