

LZZBW-35A 型电流互感器

LZZBW-35A type current transformer

概述 Summarize

LZZBW-35A 型电流互感器适用于额定频率为 50Hz 或 60Hz、额定电压为 35kV 的电力系统中，作电能计量、电流测量和继电保护用。


产品执行标准为 GB20840.1-2010、GB20840.2-2014。

LZZBW-35A current transformer is suitable for electric energy measurement, current measurement and relay protection in power system with rated frequency of 50Hz or 60Hz and rated voltage of 35kV.

The product implementation standards are GB20840.1-2010 and GB20840.2-2014.



型号及其含义 Model and its meaning

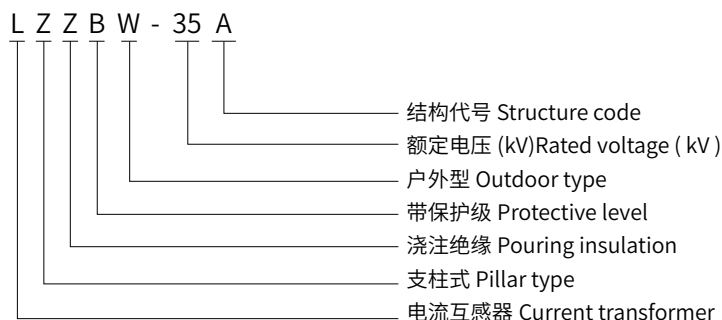

正常使用条件 Normal service condition

- 安装场所: 户外。
- 环境温度: 最高气温40℃; 最低气温-25℃; 日平均气温不超过 30℃。
- 大气条件: 大气中无严重污秽
- Installation place : outdoor.
- Ambient temperature : maximum temperature 40 ° C ; minimum temperature-25 ° C ; the average daily temperature does not exceed 30 ° C.
- Atmospheric conditions : no serious pollution in the atmosphere

技术参数 Technical parameter

LZZBW-35A 电流互感器技术参数表 LZZBW-35A current transformer technical parameter table

产品型号 Product model	额定一次电流 (A) Rated primary current	准确级组合 Accuracy level combination	额定输出 (VA) Rated output			额定短时热电流 (kA/s) Rated short-term thermal current	额定动稳定电流 (kA) Rated dynamic stability current
			0.2	0.5	5P20		
LZZBW-35A	20-100	0.2/5P20 0.5/5P20	10	15	15	150lin	375lin
	150-200					31.5	80
	300-500					31.5/2	
	600-1200		15	30	20	31.5/4	
	1500		20	40	30	40/4	125

外形图及安装尺寸 Outline and mounting dimensions

