

D363/D364 系列电流互感器

D363/D364 Series current transformer

适用范围 Scope of application

A range of (2 frames) combination design 3 in 1 plastic case current transformer, save more space comparing general unit CT.

特点 Feature


- 二种安装方式：底板 / 汇流排
- 内置翻盖式端子
- 节省更多的空间
- 额定一次电流从 30A 到 600A
- Two installation methods: floor / bus bar
- Built-in flip-cover terminal
- Save more space
- Rated primary current from 30A to 600A


标准 Standard

IEC60044-1 GB1208-2006

技术参数 Technical parameters


额定频率 Rated Frequency	50/60Hz
耐受电压 Rated Test Voltage	3kv AC.(1min)
额定热电流 Rated short-time thermal current (Ith)	60In
动稳定电流 Rated dynamic current	2.5Ith
额定电压 Rated voltage (Um)	0.72Kv AC.
过载 Continuous overload (Id)	1.2In
工作温度范围 Operating temperature	-10° C ~50° C
外壳阻燃等级 Housing self-extinguishing class	VO
准确限制系数 Safety factor	FS 5
二次电流 Secondary current	5A/1A

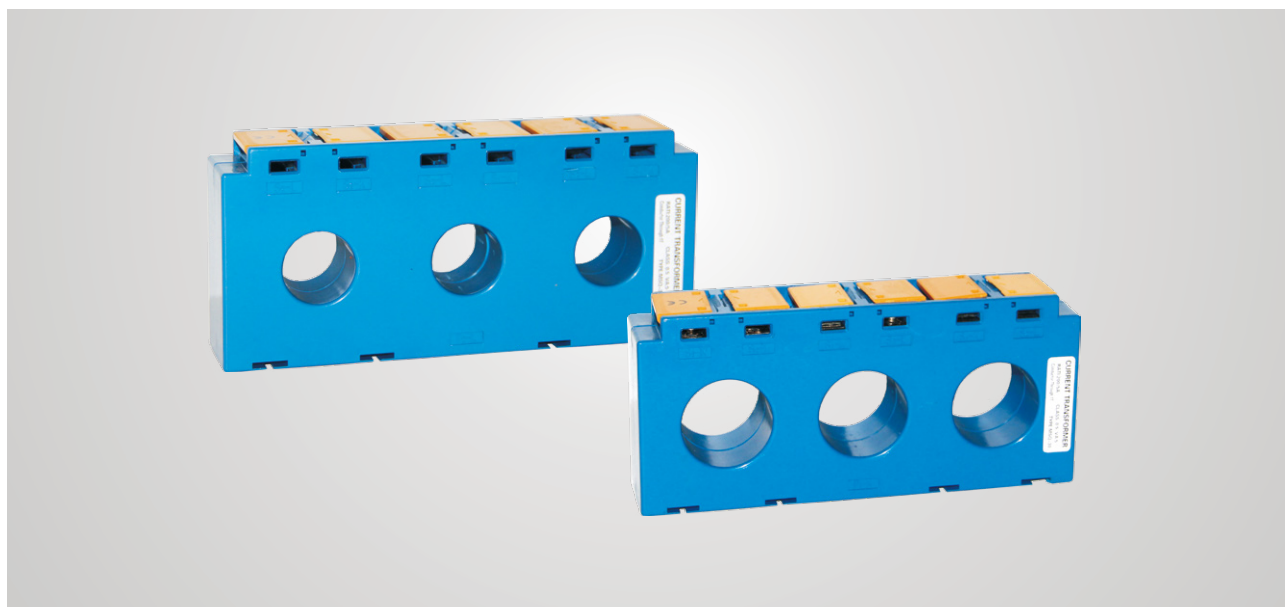



D363

型号 Model	电流比 A Current ratio	负荷 (VA) Burden
		1.0
D363	75/5	1.5
	100/5	1.5
	150/5	2.5
	200/5	3.75
	250/5	5
	300/5	5
	400/5	5
	500/5	5

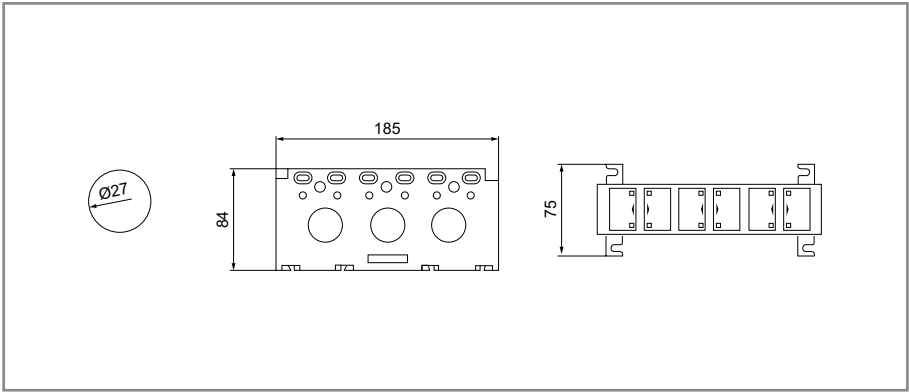

D364

型号 Model	电流比 A Current ratio	负荷 (VA) Burden
		1.0
364	300/5	3.75
	400/5	5
	500/5	5
	600/5	5

