

LMK(DP)-0.66 型电流互感器

LMK(DP)-0.66 current transformer

适用范围 Scope of application

LMK(DP)-0.66 型电流互感器主要用于户内，供额定电压为 0.66kV 及以下，额定频率为 50Hz 的交流电路中作为电流、电能测量或继电保护用。产品为塑壳式电流互感器，广泛应用于成套柜体，其安装方法可采用母排固定和底板固定安装方法，适合任意方向安装。

符合标准：GB/T 20840

The LMK(DP)-0.66 type current transformer is mainly used indoors and is applied in AC circuits with a rated voltage of 0.66kV or less and a rated frequency of 50Hz for current, energy measurement or relay protection purposes. The product is a molded case current transformer, which is widely used in complete cabinet bodies. Its installation methods can adopt busbar fixation and base plate fixation installation methods, and it is suitable for installation in any direction.


Standard: GB/T 20840

正常工作条件及安装条件

Normal working conditions and installation conditions

- 安装场所：户内
- 环境温度：-5℃ ~ +40℃
- 环境湿度：相对湿度不大于 80%
- 海拔高度：不超过 1000m
- 大气条件：大气中无严重污秽
- Installation place: indoor
- Ambient temperature: -5℃ ~ +40℃
- Ambient humidity: The relative humidity is less than 80%
- Altitude: No more than 1000m
- Atmospheric conditions: no serious pollution in the atmosphere

型号及其含义 Model and its meaning

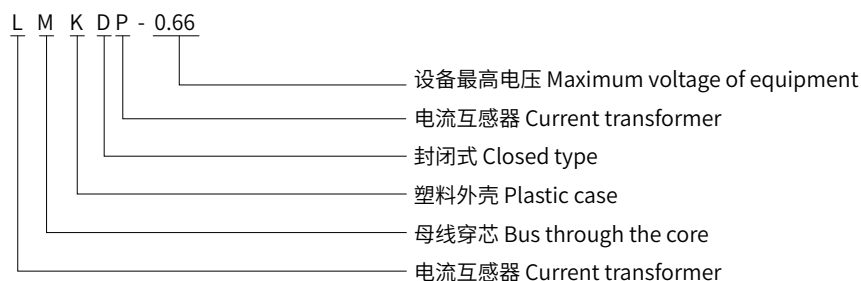



30*20



60*40



80*50



80*80



100*50

型号 Model	电流比 (A) Current ratio	额定二次负荷 (VA) Rated secondary load	穿心匝数 Number of turns through the heart	外形及安装尺寸 Outline overall and installing dimensions
		0.5/1		
30*20	100/5	1.0	1	
	150/5	1.0	1	
	200/5	1.0	1	
	300/5	1.0	1	
	400/5	2.5	1	
60*40	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
80*50	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
80*80	400/5	1.0	1	
	500/5	1.0	1	
	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
100*50	600/5	2.5	1	
	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	5.0	1	



120*80



140*60



160*80

型号 Model	电流比 (A) Current ratio	额定二次负荷 (VA) Rated secondary load	穿心匝数 Number of turns through the heart	外形及安装尺寸 Outline overall and installing dimensions
		0.5/1		
120*80	800/5	2.5	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	10.0	1	
140*60	3000/5	10.0	1	
	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	10.0	1	
	3000/5	10.0	1	
	4000/5	10.0	1	
160*80	1000/5	5.0	1	
	1200/5	5.0	1	
	1500/5	5.0	1	
	2000/5	5.0	1	
	2500/5	10.0	1	
	3000/5	10.0	1	
	4000/5	10.0	1	
	5000/5	20.0	1	
	6000/5	20.0	1	