


LMZK-10 充气柜专用开启式电流互感器

LMZK-10 Open-type current transformer dedicated to gas-filled cabinets

型号及其含义 Model and its meaning

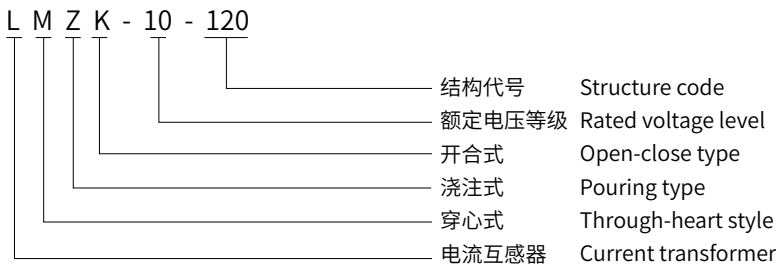

技术参数 Technical parameters

- 负荷的功率因数: $\text{COC}\phi=0.8$ (滞后)

■ 额定二次电流: 5A 或 1A

■ 额定频率: 50Hz 或 60Hz

■ 污秽等级: III 级

■ 环境温度: 最低温度 -5°C , 最高温度 40°C , 日均温度不超过 30°C

■ 海拔高度: $\leq 1000\text{m}$

■ 产品标准: GB/T20840.1 GB/T20840.2
- Power factor of load: $\text{COC}\phi=0.8$ (lag)

■ Rated secondary current: 5A or 1A

■ Rated frequency: 50Hz or 60Hz

■ Contamination level: Grade III

■ Ambient temperature: Minimum temperature -5°C , maximum temperature 40°C , daily average temperature not exceeding 30°C

■ Altitude: $\leq 1000\text{m}$

■ Product standards: GB/T20840.1 / GB/T20840.2

型号 Model	用途 Purpose	测量电流互感器 Measure the current transformer			保护电流互感器 Protect the current transformer		双绕组电流互感器 Double-winding current transformer			
		准确级及额定负载 Accuracy level and rated load (VA)			准确级及额定负载 Accuracy level and rated load (VA)		准确级及额定负载 Accuracy level and rated load (VA)			
		0.5	1	3	10P5	10P10	0.5	1	10P10	10P5
LMZK-10-120	50/5	-	-	2.5	-	-	-	-	-	-
	75/5	-	-	2.5	-	-	-	-	-	-
	100/5	-	2.5	-	2.5	-	-	-	-	-
	150/5	-	2.5	-	3.75	1.5	-	-	-	-
	200/5	2.5	2.5	-	5	2.5	-	-	-	-
	300/5	2.5	2.5	-	5	2.5	-	2.5	-	1.5
	400/5	5	5	-	5	2.5	2.5	2.5	-	2.5
	500/5	5	5	-	5	2.5	2.5	2.5	-	2.5
	600/5	5	5	-	5	2.5	2.5	2.5	-	2.5

外形图及安装尺寸 Outline and mounting dimensions

