



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

Product Specification

Customer: _____

Model Name: _____ H070IWS50I1K002-CT24 _____

Date: _____ 2023.08.16 _____

Version: _____ A0 _____

☒ Preliminary Specification

☐ Final Specification

For Customer's Acceptance

Approved by	Comment

Approved by	Reviewed by	Prepared by



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

Table of Contents

1. Record of Revision	3
2. General Specifications	4
3. Input/Output Terminals	5~7
4. Absolute Maximum Ratings	8
5. Electrical Characteristics	8~15
6. Optical Characteristics	16~18
7. Environmental / Reliability Tests	19
8. Mechanical Drawing	20
9. Packing	21
10. Precautions For Use of LCD modules	22



1. Record of Revision

Rev	Issued Date	Description	Editor
A0	2023/08/16	First Release.	



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

2 General Specifications

Feature		Spec
Characteristics	Size	7 inch
	Resolution	1024(horizontal)*600(Vertical)
	Interface	24-bit RGB
	Connect type	Connector
	Color Depth	16.7M
	Technology type	a-Si
	Display Spec. Pixel pitch (mm)	0.1506 x 0.1432
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	Normally Black
	Driver IC	HX8282/HX8696
	Surface Treatment	HC
	Viewing Direction	ALL
Mechanical	LCM (W x H x D) (mm)	164.9*100*8.50
	Active Area(mm)	154.21*85.92
	With /Without TSP	Without TSP
	Weight (g)	TBD
	LED Numbers	30 LEDs

Note 1: Viewing direction is follow the data which measured by optics equipment.

Note 2: Requirements on Environmental Protection: RoHS

Note 3: LCM weight tolerance: +/- 5%



3 Input/Output Terminals

PIN	PIN NAME	DESCRIPTION
1	LEDA	LED backlight (Anode).
2	LEDA	
3	LEDK	LED backlight (Cathode).
4	LEDK	
5	GND	Power ground
6	VCOM	Common Voltage.
7	DVDD	Digital Power.
8	MODE	DE/SYNC mode select. Normally pull high. H: DE mode. L: HSD/VSD mode.
9	DE	Data Enable signal.
10	VS	Vertical sync input. Negative polarity.
11	HS	Horizontal sync input. Negative polarity.
12	B7	Blue Data Input (MSB).
13	B6	Blue Data Input.
14	B5	Blue Data Input.
15	B4	Blue Data Input.
16	B3	Blue Data Input.
17	B2	Blue Data Input.
18	B1	Blue Data Input.
19	B0	Blue Data Input (LSB).
20	G7	Green Data Input (MSB).
21	G6	Green Data Input.
22	G5	Green Data Input.
23	G4	Green Data Input.
24	G3	Green Data Input.
25	G2	Green Data Input.
26	G1	Green Data Input.
27	G0	Green Data Input (LSB).
28	R7	Red Data Input (MSB).
29	R6	Red Data Input.
30	R5	Red Data Input.
31	R4	Red Data Input.
32	R3	Red Data Input.
33	R2	Red Data Input.
34	R1	Red Data Input.
35	R0	Red Data Input (LSB).
36	GND	Power ground.
37	DCLK	Clock input.
38	GND	Power ground.



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

39	L/R	Left or Right Display Control.	Note:1
40	U/D	Up / Down Display Control.	Note:1
41	VGH	Positive Power for TFT.	
42	VGL	Negative Power for TFT.	
43	AVDD	Analog Power.	
44	RESET	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high.(R=10K Ω , C=1 μ F)	
45	NC.	Not connect.	
46	VCOM	Common Voltage.	
47	DITHB	Dithering function enable control. (Normally pull high) DITHB="L", to enable internal dithering function. DITHB="H", to disable internal dithering function.	
48	GND	Power ground.	
49	NC.	Not connect.	
50	NC.	Not connect.	




深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

【Note1】SHLR : left or right setting
UPDN : up or down setting

UPDN	SHLR	FUNCTION
0	1	Normal Display
0	0	Inverse Left and Right
1	1	Inverse Up and Down
1	0	Inverse Left and Right Inverse Up and Down

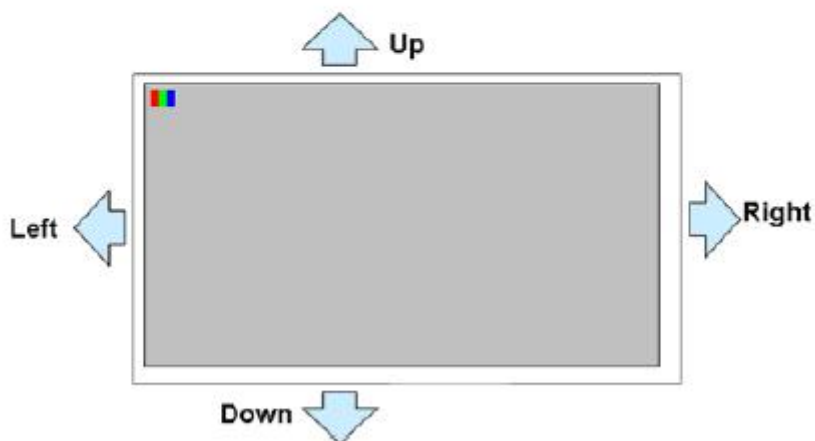



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

4 Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit
Logic Supply Voltage	DVDD	-0.5	3.96	V
Analog Supply Voltage	AVDD	-0.5	14.85	V
High Supply Voltage	VGH	-0.3	40	V
Low Supply Voltage	VGL	-20	0.3	V
Operating Temperature	T _{OP}	-30	85	°C
Storage Temperature	T _{ST}	-40	85	°C

5 Electrical Characteristics

5.1 Typical operation conditions

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Input signal Voltage	VCOM	3.7	4.2	4.7	V	-
Logic Supply Voltage	DVDD	2.3	3.3	3.6	V	-
Analog Supply Voltage	AVDD	6.5	11	13.5	V	
Low Supply Voltage	VGL	-7.5	-7	-6.5	V	
High Supply Voltage	VGH	16.5	17	17.5	V	
Output High Voltage	VIH	0.7xVDD	-	VDD	V	-
Output Low Voltage	VIL	0	-	0.3xVDD	V	-

Note 1: Please adjust VCOM to make the flicker level be minimum. Typ VCOM 电压值

只做参考，具体以实际效果为准（根据FLICKER 状态可调整）

Note 2: The gate IC is the HX8696-A, The source IC is the HX8282-A



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Current for Driver	I_{GH}	-	0.2	1.0	mA	$V_{GH} = 17V$
	I_{GL}	-	0.2	1.0	mA	$V_{GL} = -7.0V$
	IDV_{DD}	-	8	20	mA	$DV_{DD} = 3.3V$
	IAV_{DD}	-	20	50	mA	$AV_{DD} = 11V$



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

5.2.1 power signal sequence

TTL mode DC electrical characteristics

(VDD=3.0~3.6V, AVDD=6.5~13.5V, GND=AGND=0V, TA=-20°C~+85°C)

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Power supply voltage	VDD	3.0	-	3.6	V	-
Power supply voltage	AVDD	6.5	-	13.5	V	-
Power supply voltage	AVDDL	6.5	-	13.5	V	Full range application
		-	V8+0.1	-	V	Half AVDD application
Power supply voltage	AGNDH	0			V	Full range application
		-	V7-0.1	-	V	Half AVDD application
AVDD regulate output	AVDDG	8.9	9	9.1	V	AVDD=10V, VDD=3.3V, with Resistor loading $\geq 30K\ \Omega$, and Capacitor loading $\geq 4.7\mu F$
Low level input voltage	V _{IL}	0	-	0.3VDD	V	For digital circuit
High level input voltage	V _{IH}	0.7VDD	-	VDD	V	For digital circuit
Output low voltage	V _{OL}	-	-	GND+0.4	V	I _{OL} =400 μA
Output high voltage	V _{OH}	VDD-0.4	-	-	V	I _{OH} =-400 μA
Pull low/high resistance	R _i	200	250	300	k Ω	For the digital input pin @VDD=3.3V
Input leakage current	I _i	-	-	± 1	μA	For digital circuit
Digital Operation current	I _{dd}	-	12	20	mA	Fclk=50MHz, LD=48KHz, VDD=3.3V, No load
Digital stand-by current	I _{st1}	-	10	50	μA	Clock & all functions are stopped
Analog Operating current	I _{dda}	-	8	10	mA	No load, Fclk=50MHz, LD=48KHz @ AVDD=10V, V1=8V, V14=0.4V
Analog Stand-by current	I _{st2}	-	10	50	μA	No load, clock & all functions are stopped
Input level of V1~V7	V _{ref1}	0.4AVDD	-	AVDD-0.1	V	Gamma correction voltage input
Input level of V8~V14	V _{ref2}	0.1	-	0.6AVDD	V	Gamma correction voltage input
Output Voltage deviation	V _{od1}	-	± 20	± 35	mV	V _o =AGND+0.1V~AGND+0.5V & V _o =AVDD-0.5V~AVDD-0.1V
Output Voltage deviation	V _{od2}	-	± 15	± 20	mV	V _o =AGND+0.5V~AVDD-0.5V
Output Voltage Offset between Chips	V _{oc}	-	-	± 20	mV	V _o =AGND+0.5V~AVDD-0.5V
Dynamic Range of Output	V _{dr}	0.1	-	AVDD-0.1	V	SO1~SO1200
Sinking Current of Outputs	I _{OLy}	80	-	-	μA	SO1~SO1200; V _o =0.1V vs. 1.0V, AVDD=13.5V
Driving Current of Outputs	I _{OHy}	80	-	-	μA	SO1~SO1200; V _o =0.1V vs. 12.5V, AVDD=13.5V
Resistance of Gamma Table	R _g	0.7*R _n	1.0*R _n	1.3*R _n	Ω	R _n : Internal gamma resistor

Table 9.2: DC electrical characteristics



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

TTL mode AC electrical characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
VDD Power On Slew rate	T_{POR}	-	-	20	ms	From 0V to 90% VDD
GRB pulse width	T_{GRB}	50	-	-	μ s	-
DCLK cycle time	T_{csh}	14	-	-	ns	-
DCLK pulse duty	T_{csh}	40	50	60	%	-
VSD setup time	T_{rst}	5	-	-	ns	-
VSD hold time	T_{vhd}	5	-	-	ns	-
HSD setup time	T_{rst}	5	-	-	ns	-
HSD hold time	T_{hhd}	5	-	-	ns	-
Data set-up time	T_{dsu}	5	-	-	ns	D0[7:0], D1[7:0], D2[7:0] to DCLK
Data hold time	T_{dhd}	5	-	-	ns	D0[7:0], D1[7:0], D2[7:0] to DCLK
DE setup time	T_{esu}	5	-	-	ns	-
DE hold time	T_{ehd}	5	-	-	ns	-
Output stable time	T_{sst}	-	-	6	μ s	10% to 90% target voltage. CL=90pF, R=10K ohm (Cascade)
				3		Dual gate

Table 10.1: TTL mode AC electrical characteristics



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.


5.2.2 Interface Timing

To prevent the device damage from latch up, the power on/off sequence shown below must be followed.

Power on: VDD, GND _ AVDD, AGND _ V1 to V14

Power off: V1 to V14 _ AVDD, AGND _ VDD, GND


Power on/off control

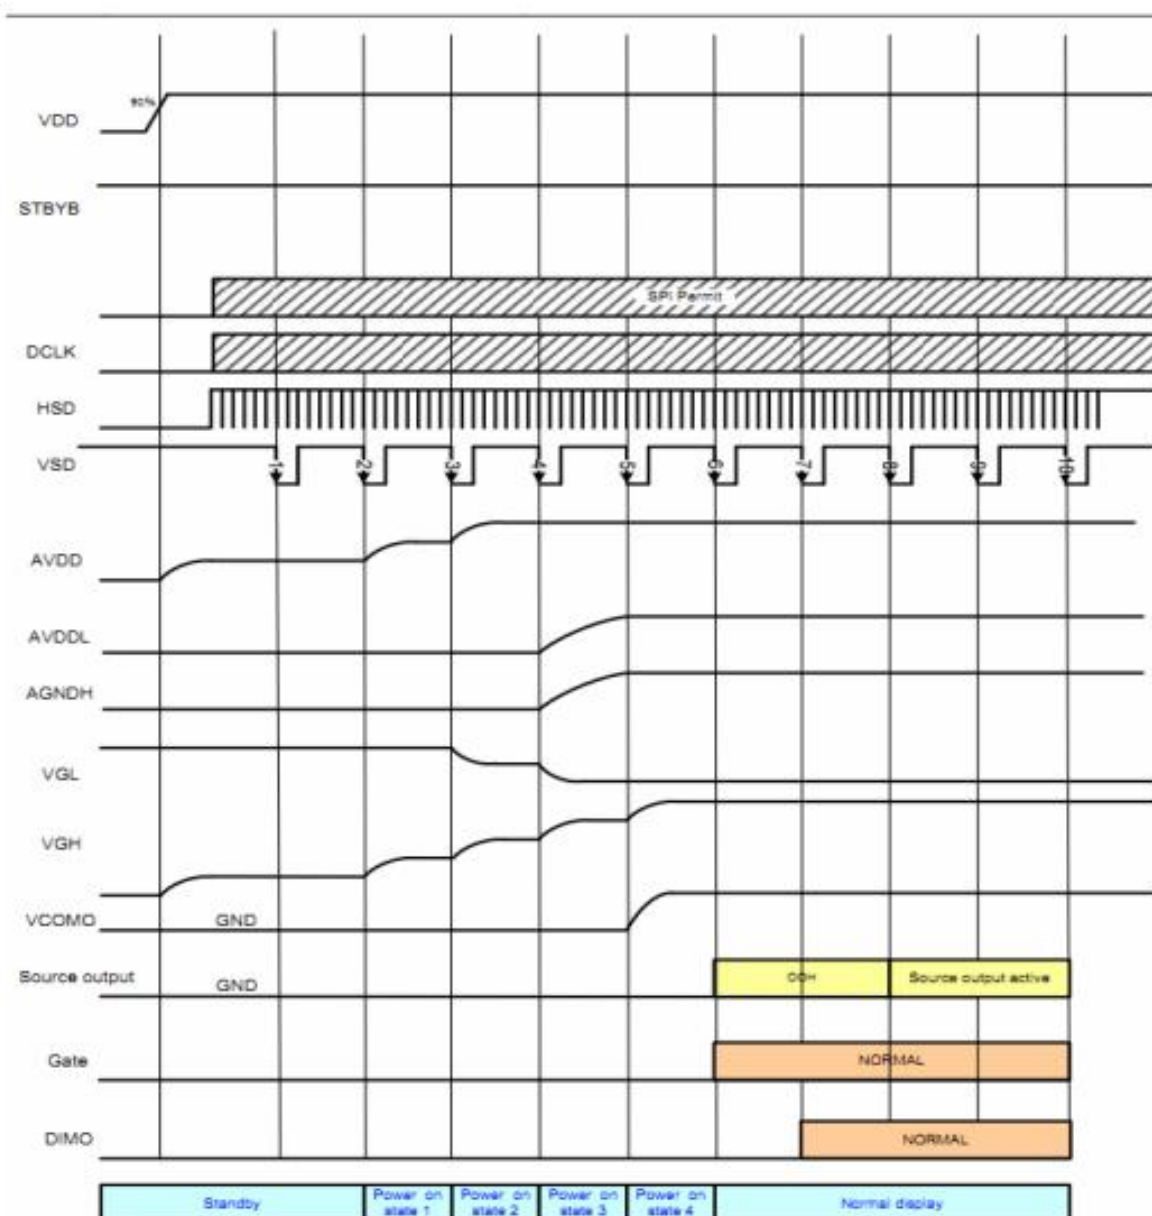



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

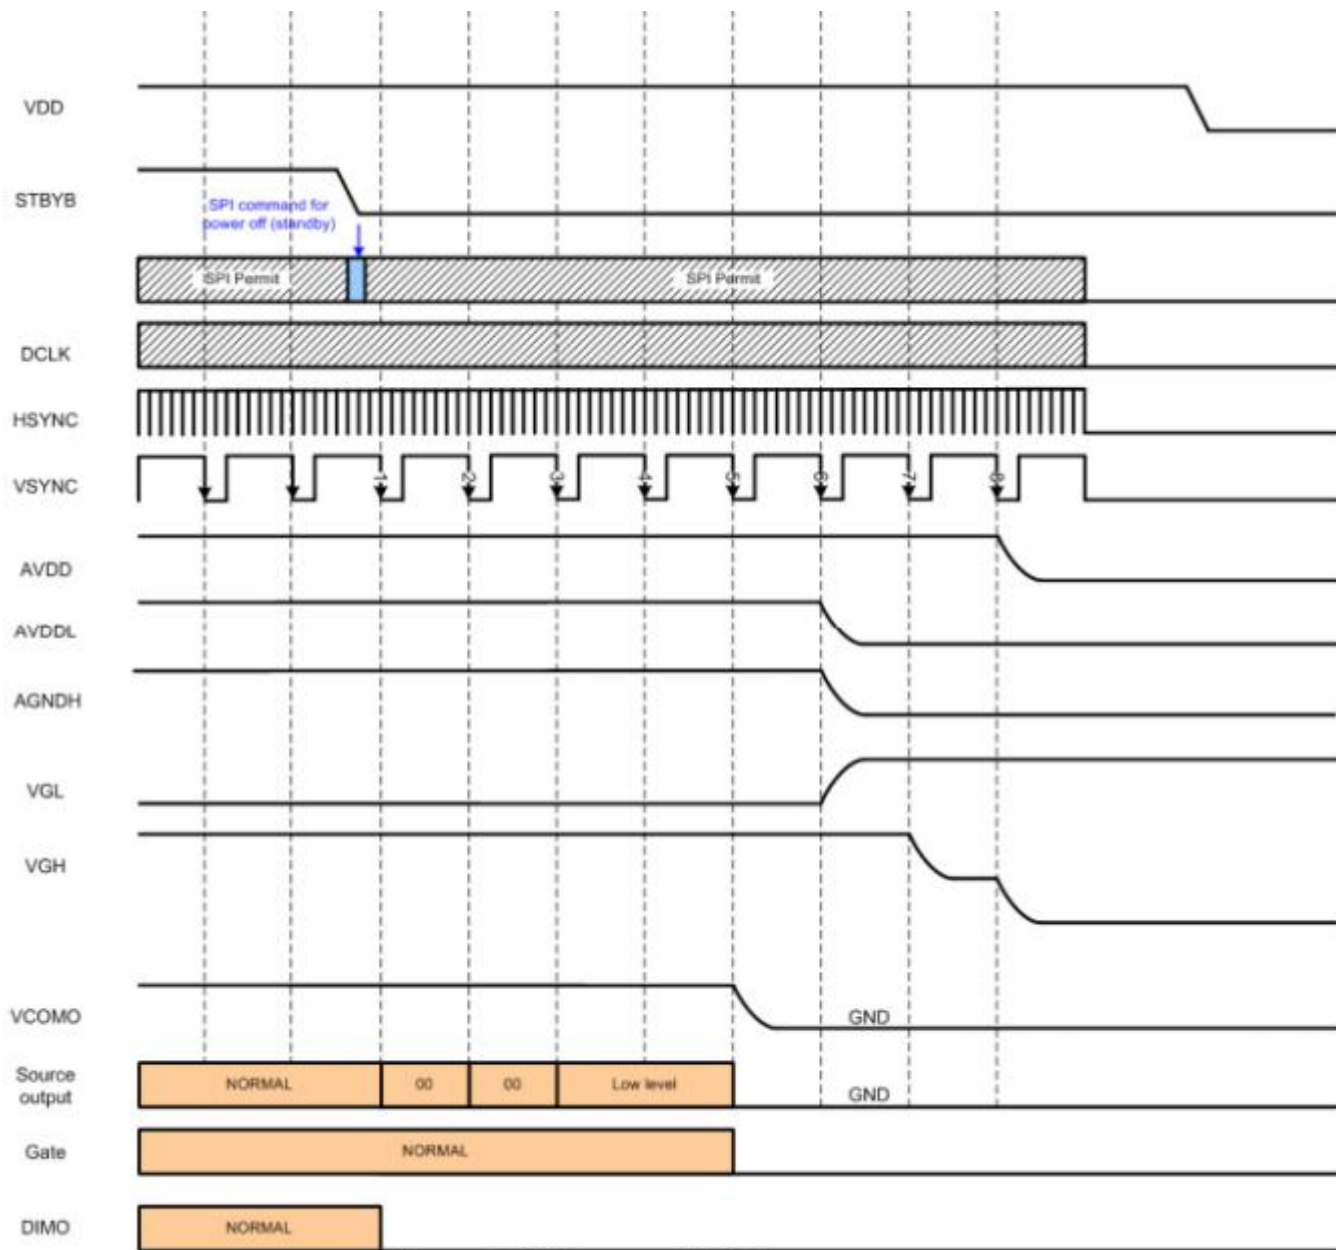

Power off timing sequence



深圳市勋瑞光电科技有限公司


Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

5.4 Timing characteristics of input signals

DE mode (1024x600)

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	40.8	51.2	67.2	MHz
Horizontal Display Area	thd	1024			DCLK
HSD Period	th	1114	1344	1400	DCLK
HSD Blanking	thb+ thfp	90	320	376	DCLK
Vertical Display Area	tvd	600			T _H
VSD Period	tv	610	635	800	T _H
VSD Blanking	tvbp+ tvfp	10	35	200	T _H

Input Clock and Data Timing Diagram

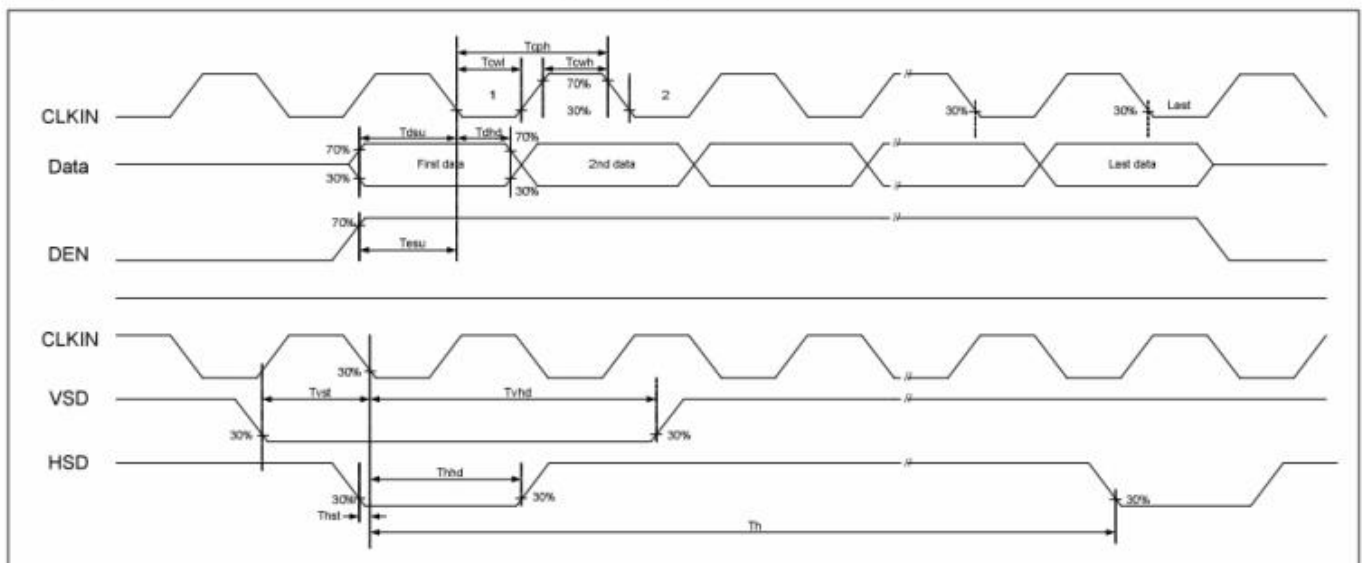




5.4 Driving Backlight

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I_F	-	300	-	mA	
Forward Voltage	V_F	8.4	9	10.2	V	
colour temperature		-	-	-	K(kelvin)	
Backlight Power consumption	W_{BL}	-	TBD	-	W	
LED life-span	-	25000	-	-	Hrs	

Note 1: Each LED : $I_F = 30\text{ mA}$, $V_F = 3\text{V}$.

Note 2: Optical performance should be evaluated at $T_a = 25^\circ\text{C}$ only.

Note 3: If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

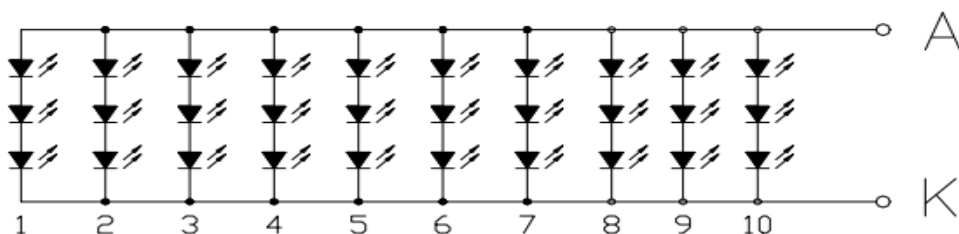



6 Optical Characteristics

Items		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angles		θ_T	Center CR≥10	80	85	-	Degree.	Note2
		θ_B		80	85	-		
		θ_L		80	85	-		
		θ_R		80	85	-		
Contrast Ratio		CR	$\Theta =0$	800	1000	-	-	Note1 Note3
Response Time		T_r+T_f	25°C	-	25	35	ms	Note1 Note4
Chromaticity	White	X_W	Backlight is on	0.305	0.335	0.365	-	Note1 Note5
		Y_W		0.325	0.355	0.385	-	
	Red	X_R		0.594	0.614	0.634	-	
		Y_R		0.320	0.340	0.360	-	
	Green	X_G		0.268	0.288	0.308	-	
		Y_G		0.513	0.533	0.553	-	
	Blue	X_B		0.118	0.138	0.158	-	
		Y_B		0.116	0.136	0.156	-	
Uniformity		U		75	-	-	%	Note1 Note6
LCM Luminance		L		900	1000	-	cd/m2	Note1 Note7

Test Conditions:

1. $V_{DD}=3.3V$, the ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note 2.
3. Contrast Ratio (CR) = L_{255} / L_0
 L_{255} : Luminance of gray level 255
 L_0 : Luminance of gray level 0


Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

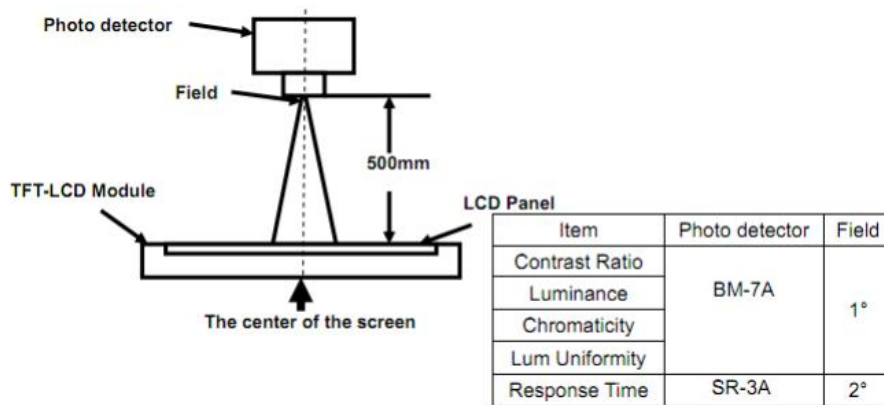

Note 2: Definition of viewing angle range and measurement system.
viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

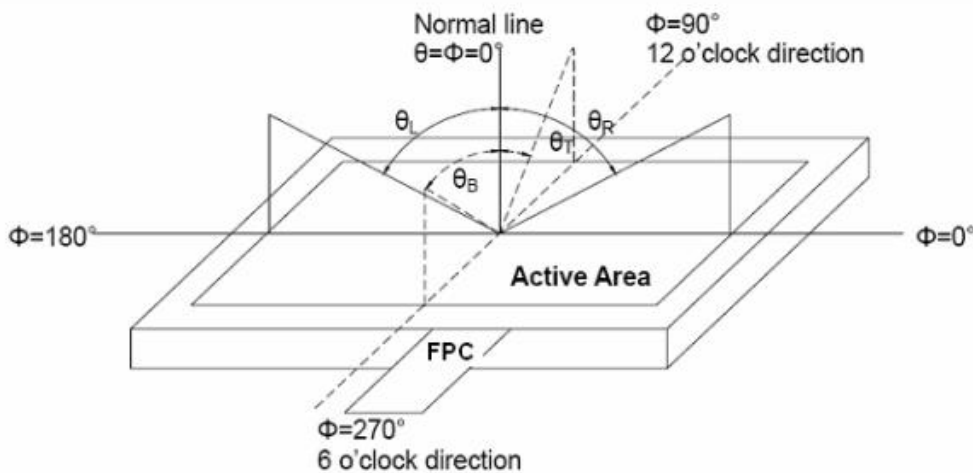


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

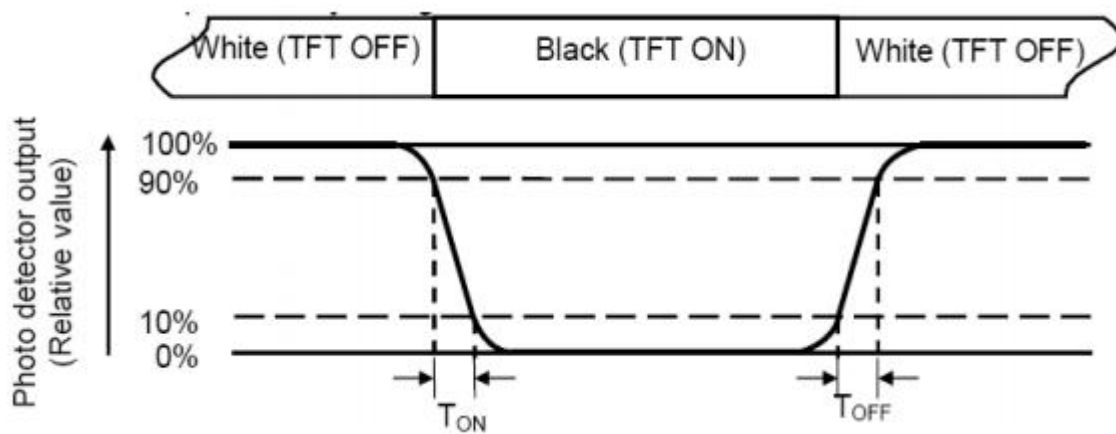

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity(U) = $L_{min} / L_{max} \times 100\%$

L-----Active area length W----- Active area width

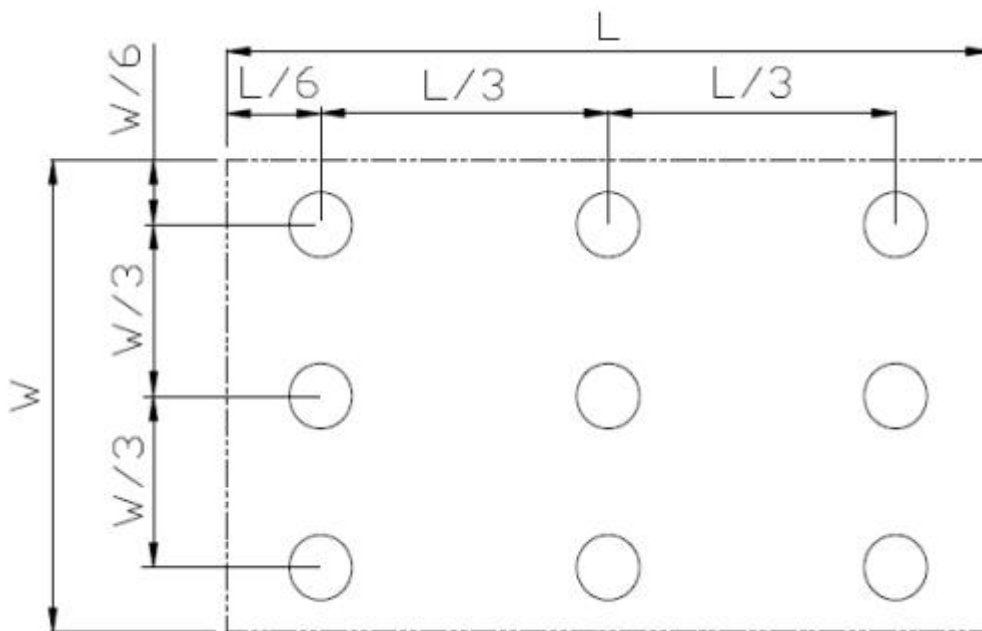


Fig. 2 Definition of uniformity

L_{max} : The measured maximum luminance of all measurement position.

L_{min} : The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

7 Environmental / Reliability Tests





No	Test Item	Condition	Remarks
1	High Temperature Opeartion	T _s = +85°C, 96hrs	Note 1 IEC60068-2-2, GB2423. 2-89
2	Low Temperature Opeartion	T _a = -30°C, 96hrs	Note 2 IEC60068-2-1 GB2423.1-89
3	High Temperature Storage	T _a = +85°C, 96hrs	IEC60068-2-2 GB2423. 2-89
4	Low Temperature Storage	T _a = -40°C, 96hrs	IEC60068-2-1 GB/T2423.1-89
5	High Temperature & Humidity Storage	T _a = +60°C, 90% RH max, 96 hours	IEC60068-2-3 GB/T2423.3-2006
6	Thermal Shock (Non-operation)	-40°C 30 min ~ +85°C 30 min Change time: 5min, 20 Cycle	Start with cold temperature,end with high temperature IEC60068-2-14, GB2423.22-87
7	Electro Discharge (Opeartion) Static	C=150pF, R=330 Ω, 5 points/panel Air:±8KV, 5 times; Contact: ±4KV, 5 times; (Environment: 15°C ~ 35°C, 30% ~ 60%, 86Kpa ~ 106Kpa)	IEC61000-4-2 GB/T17626.2-1998
8	Vibration (Non-operation)	Frequency range: 10~55Hz, Stroke: 1.mm Sweep: 10Hz~55Hz~10Hz 2 hours for each direction of X .Y. Z. (package condition)	IEC60068-2-6 GB/T2423.5-1995
9	Shock (Non-operation)	60G 6ms, ± X, ±Y , ± Z 3 times for each direction	IEC60068-2-27 GB/T2423.5-1995
10	Package Drop Test	Height: 80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/T2423.8-1995

Note: 1. T_s is the temperature of panel's surface.

2. T_a is the ambient temperature of sample.

8 Mechanical Drawing

REV.	DATE	MODIFICATION
A0	2023.08.16	First Issue

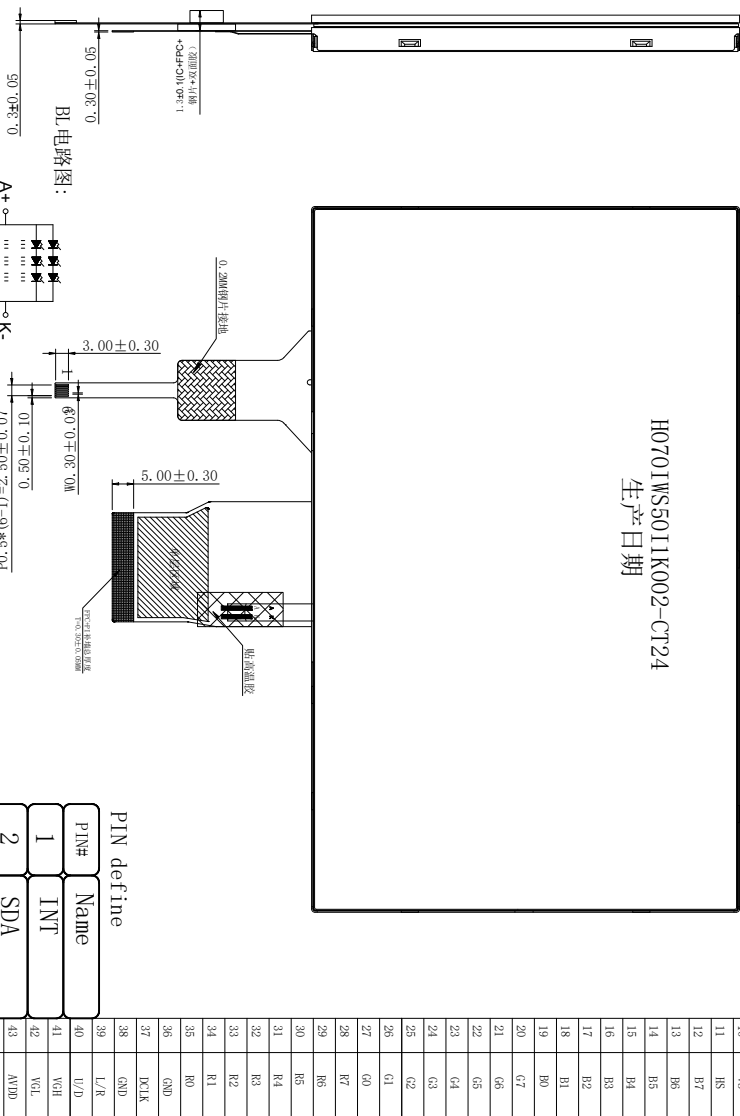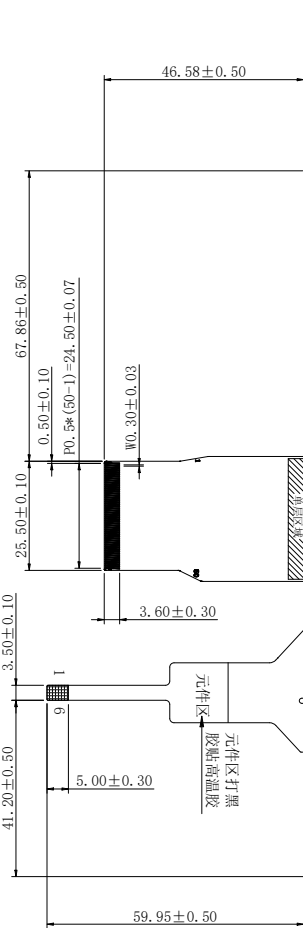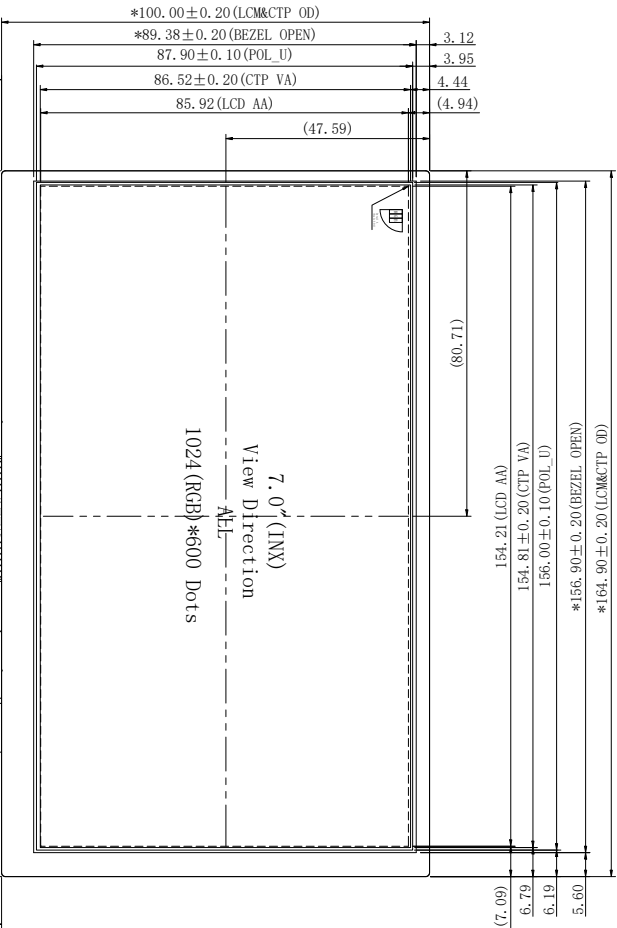

NOTES:

1. DISPLAY TYPE: 7.0 INCH TFT /Normally BLACK Transmissive
2. BACKLIGHT: 30 CHIP WHITE LED, IN PARALLEL
3. OPERATING TEMP: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. STORAGE TEMP: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
5. RESOLUTION: 1024RGBx600
6. LCD IC: TBD
7. Typical Lumiance: 900cd/m² (MIN), 1000cd/m² (TYP)
8. " () " reference dimension. " * " critical dimension
9. RoHS Compliant

- 技术要求:
- 1、结构为:G+G IC: G1911 通道数:TX20 RX12
 - 2、盖板材质: 物理钢化, T=1.8mm 表面硬度: 6H
 - 3、成品可视区透光率: $\geq 85\%$
 - 4、要求肉眼看不到蚀刻纹
 - 5、TP翘曲度 $\leq 0.3\text{mm}$
 - 6、未标注公差为 $\pm 0.2\text{mm}$, 未注倒边 $CO.15 \pm 0.05\text{mm}$
 - 7、操作环境: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$, $20\% \sim 90\% \text{RH}$
 - 8、所有材料符合RoHS标准

INTERFACE	RGB Interface	 深圳市勋磊光电科技有限公司 Zunnu Photoelectric Technology (Shenzhen) Co., Ltd.	MODEL NAME	PART NO.	
	FPC Connector		TFT Display Module	H0701WS5011K002-CT24	
VIEWING DIRECTION	ALL	CHKD	DWN	REV. A0	SHEET OF 1/1
Gray Scale DIRECTION	FREE	PROJECTION	TOLERANCE UNLESS SPECIFIED		
		3RD ANGLE 	UNIT	mm	SCALE 1:1



PIN#	Name	L/R
1	INT	40
2	SDA	41
3	SCL	42
4	RESET	43
5	GND	44
6	VDD (3.3V)	45

			
Xuzhou Xingguang Electronic Technology Co., Ltd. Xuzhou photoelectric technology (Shenzhen) Co., Ltd.			
ME	PART NO.	HOTO1WS5011K002-CT24	
Delay Module	REV.	SHEET OF	1/1
	TOLERANCE UNLESS SPECIFIED		
	UNIT	SCALE	
3RD ANGLE	mm	1:1	

深圳福晶光电科技有限公司 Xinru Photonics Technology (Shenzhen) Co., Ltd.			
e	PART NO.		
	H0701WMS5011K002-CT24		
	REV.	SHEET OF	
	A0	1/1	
	TOLERANCE UNLESS SPECIFIED		
	UNIT	SCALE	
	mm	1:1	



深圳市勋瑞光电科技有限公司

Xunrui Shenzhen Optoelectronics Technology Co., Ltd.

9 Packing

Packing Method

TBD



10. Precautions For Use of LCD modules

10.1 Handling Precautions

10.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6. Do not attempt to disassemble the LCD Module.

10.1.7. If the logic circuit power is off, do not apply the input signals.

10.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

10.1.8.1. Be sure to ground the body when handling the LCD Modules.

10.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.

10.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

10.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

10.2 Storage Precautions

10.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0℃ ~ 40℃ Relatively humidity: ≤80%

10.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.