



Round



Square

Alvon-Ivexa - IP65 Mini Spike Light/Lawn Light



※ Features:

- ◆ IP Rate: IP65;
- ◆ Working Temp: -20°C~+45°C;
- ◆ Lumens: Depends on the chip CRI, decorative cup color, etc..
- ◆ Lifetime: 50,000Hrs;
- ◆ Light source : AUUCKSUN;
- ◆ Materials: Aluminum+Glass;
- ◆ With CE, RoHs;
- ◆ 5 years' warranty;
- ◆ Function: ON/OFF /DALI /Traic/ 0-10V...
- ◆ DC24V.

※ Application:

This mini garden light features a compact size and adjustable head, making it ideal for precise, small-area lighting and ambiance creation. With an IP65 waterproof rating, it withstands outdoor rain and snow for long-term stable operation.

- ◆ Garden , Landscape, Potted plants, space outdoor area of a homestay;
- ◆ Courtyard ,Park ,Outer corridor, Trees, Passageway;
- ◆ Balconies, Villas entrances, Hotel exterior wall;


Mini size, space-saving, ideal for accent lighting in small areas such as potted plants, flower beds, and pathways.



Adjustable head: Flexible angle adjustment to cater to various lighting needs for plants and architecture.



IP65





High CRI (>90): Delivers true color rendering for plants and stone, elevating landscape aesthetics.

✧ Drawing

unit:mm


Spike light




Z240101-1.5

Z240102-1.5

Lawn light




Z270110-1.5



Z270109-1.5

✧ Parameters

CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80


CRI >90

Item No	Dimension (mm)	Power	Lumen $\pm 10\%$	Beam angle
Z240101-1.5	$\Phi 30 \times 27 \times 45 / 150$ mm	1.5W	105lm	15°/24°/45°/60°
Z240102-1.5	$22 \times 28 \times 45 / 150$ mm	1.5W	105lm	15°/24°/45°/60°
Z270110-1.5	$\Phi 30 \times 27 \times H700$ mm	1.5W	105lm	15°/24°/45°/60°
Z270109-1.5	$22 \times 28 \times H700$ mm	1.5W	105lm	15°/24°/45°/60°

✧ Color Option

Body color:Sandy black/Sandy white/Sandy brown/
Dark sandy brown...

※ Usage Scenario

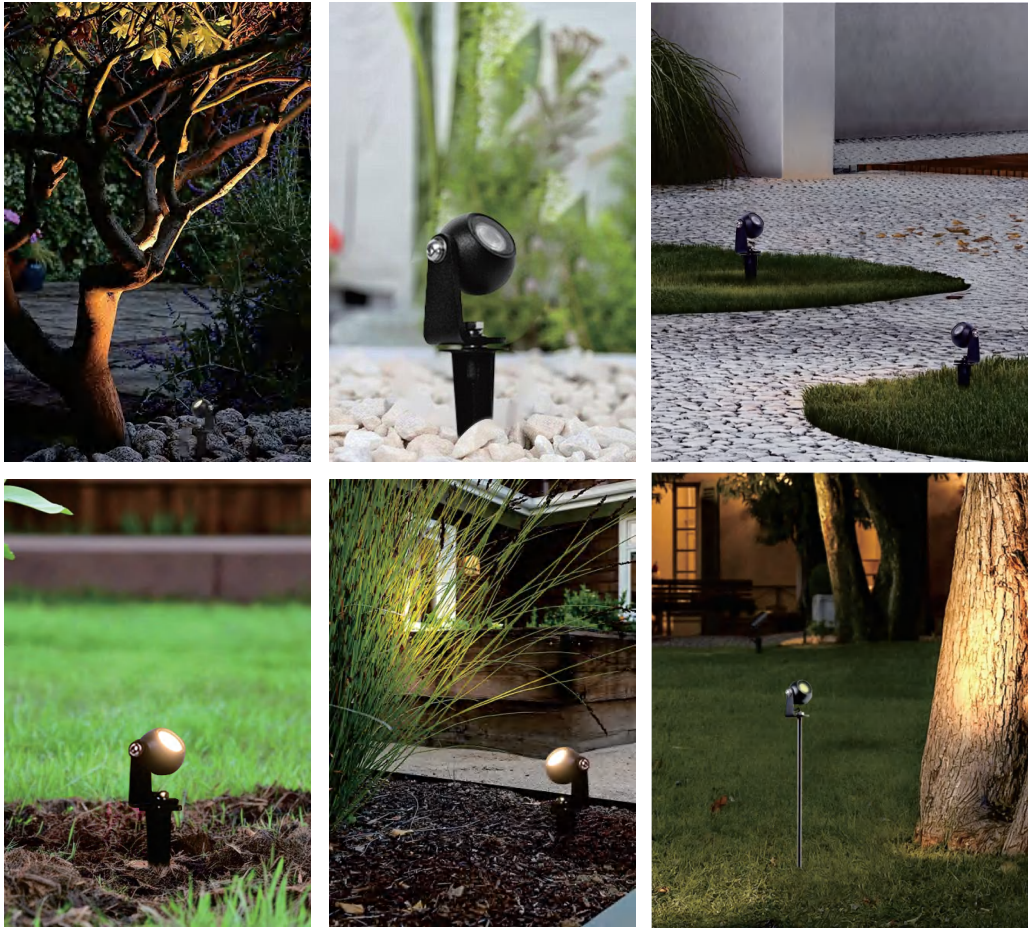

※ Package

Part No.	QTY/ Carton	Master Box(cm)	N.W.(KG)	G.W.(KG).
Z240101-1.5	50	20×20×33	/	/
Z240102-1.5	50	20×20×33	/	/
Z270110-1.5	25	20×20×74	/	/
Z270109-1.5	25	20×20×74	/	/

✂️ installation information

Installation Instruction			
Model: Z240101-1.5 Input: DC24V Power: 1.5W		FLG-1 	FLG-2
Safety Notice: Please read this installation instruction before you install, and must install by professional. If do not follow installation instruction, maybe lead to damage, fire or body hurt. 1. When use product, please pay attention to voltage. 2. Please use our local standard identification cable, and must be higher than product voltage and constant current. 3. Please power off before wiring or any operation. 4. If need to replace parts or repair, please ensure use specified parts of supplier and changed by supplier or other professional. If not be handled properly, it will lead to electric shock or other harmful effects. 5. Cable connection parts of outdoor lighting fixture need to be ensured waterproof.		FLG-3 	
		FLG-4 	
		ACCESSORY BAG 	

Installation Instruction			
Model: Z270109-1.5 Input: DC24V Power: 1.5W		FLG-1 	FLG-2
Safety Notice: Please read this installation instruction before you install, and must install by professional. If do not follow installation instruction, maybe lead to damage, fire or body hurt. 1. When use product, please pay attention to voltage. 2. Please use our local standard identification cable, and must be higher than product voltage and constant current. 3. Please power off before wiring or any operation. 4. If need to replace parts or repair, please ensure use specified parts of supplier and changed by supplier or other professional. If not be handled properly, it will lead to electric shock or other harmful effects. 5. Cable connection parts of outdoor lighting fixture need to be ensured waterproof.		FLG-3 	
		FLG-4 	
		FLG-5 	
		ACCESSORY BAG 	