Semi-outdoor Portable Dual-screen Advertising Machine










SHENZHEN LANDUN DISPLAY CO.,LTD


Product details



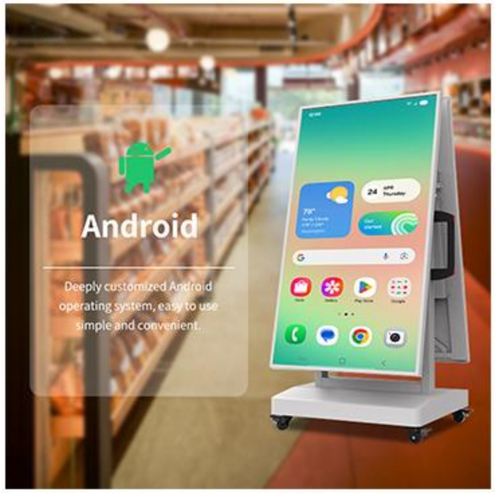







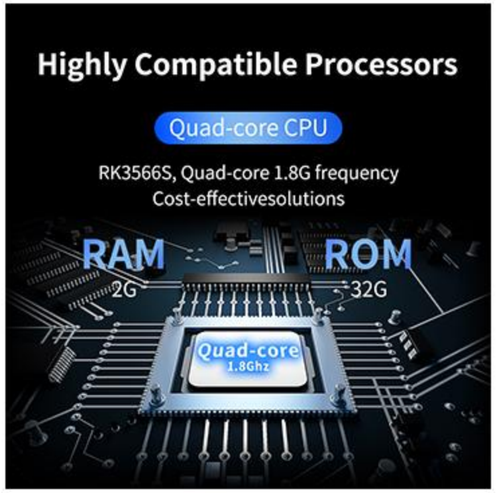



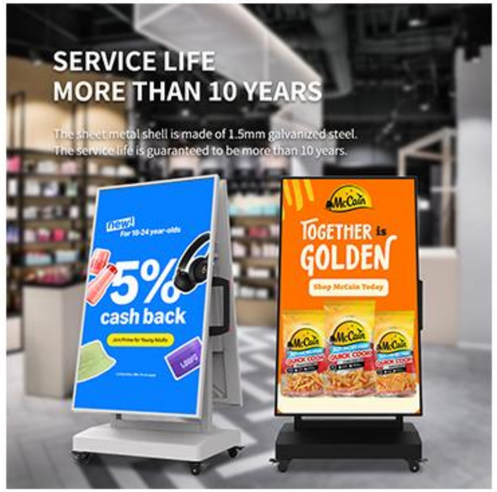

Application

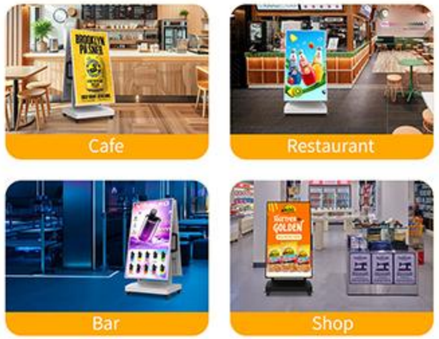

SHENZHEN LANDUN DISPLAY CO.,LTD

Product Parameters

Panel		
Panel type	43”LED Panel	49”LED Panel
Display size	943×530mm(W*H)	1074×604mm(W*H)
Display ratio	9:16	
Resolution	1080*1920	
Display color	16.7M	
Brightness	1000cd/㎡	
Contrast	1100:1	
Viewing angle	178°(H) / 178°(V)	
Response time	5ms	
Main Engine		
CPU	RK3566S 4-core 1.8G Android 11	
Memory	DDR3 2G	
Storage	Supports expansion with up to 32GB TF cards	
Network support	3G/4G wide area network, Ethernet, WiFi support, wireless peripheral expansion	
Video playback	Supports over 30 formats including AVI (H.264, DIVX, XVID), RM, RMVB, MKV (H.264, DIVX, XVID), WMV, MOV, MP4 (.H.264, MPEG, DIVX, XVID), DAT (VCD format), VOB (DVD format), PMP, MPEG,.MPG, FLV (H.263, H.264), ASF, TS, TP, 3GP, MPG, etc.	
Image format	Supports BMP, JPEG, PNG, and GIF	
USB2.0 interface	2 USB HOST standard interfaces, 2 USB expansion interfaces	

Product Parameters

System upgrade	Supports USB upgrade, SD card upgrade, and remote upgrade	
Battery		
Battery technology	Lithium iron phosphate batteries have a long service life, are safe and non-flammable, and offer stable performance	
Charging time	Charged for 7 hours	
Working hours	Work 10-12 hours (depending on the content being played)	
Battery capacity	120000 mAh	
Input voltage	24V	
Using Environment		
Working temperature	-15℃～45℃	
Storage temperature	-15℃～45℃	
Working humidity	10%～90%	
Storage humidity	10%～90%	
Power input	AC100V～240V	
Power consumption	⩽180W	⩽260W
Standby power consumption	⩽10W	⩽10W
Appearance color	White, black (customizable colors based on the color palette)	
IP Level	IP54	
Shell material	Galvanized steel plate + baked paint	
Product dimensions	1102mm*492mm*554mm	1294mm*532mm*632mm