NON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)，AWG 26 #，EN 0206，standard barrel

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **Manufactured from seamless tubing;a high quality design with no seams to split**
- **Parallel design results in only one crimp necessary.**



Product Classification

Model	EN 0206
Part Number	-
Detail Description	NON-INSULATED CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)，AWG 26 #，EN 0206，standard barrel

General Specifications

Material	Copper
Surface	Tin-plated

Dimensions

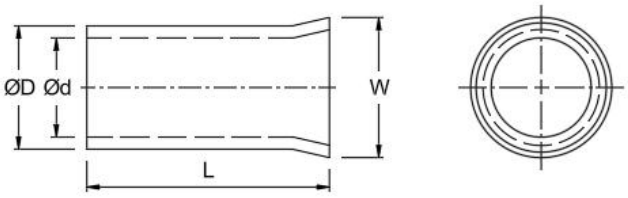

Overall Length (L)	0.24	in	6.0	mm
Tongue Width(W)	0.06	in	1.4	mm
Outer Diameter (D)	0.04	in	1.0	mm
Inner Diameter (d)	0.03	in	0.7	mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Electrical Specifications

Rating - Maximum Voltage	35kV

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)

Packaging and Weights

Included	Butt Splice
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg

Certifications and Compliance

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: JAN 16, 2026
Public