# 90 °Copper Lug, AWG 2/0#, one hole 3/8 ”,LX2/0-38FW,standard barrel, with inspection window,black

- **Barrel designed with internal chamfer at wire entry for smooth insertion of wire, preventing possible damage of the strands.**
- **Standard barrel length is recommended for installations with limited space availability.**
- **Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements.**
- **Connectors are clearly marked with stamping and barrel color coding.**
- **90 degree standard barrel for limited space applications.**




## Product Classification


| | |
|---|---|
| Model | LX2/0-38FW |
| Part Number | - |
| Detail Description | 90 ° Copper Lug, AWG 2/0#, one hole 3/8 ” ,LX2/0-38FW,standard barrel, with inspection window,black |

## General Specifications

| | |
|---|---|
| Colour Code | Black |
| Material | Copper |
| Tongue Type | Standard |
| Tongue Angle | 90 degree |
| Surface | Tin-plated |
| Inspection Window | With inspection window |

## Dimensions

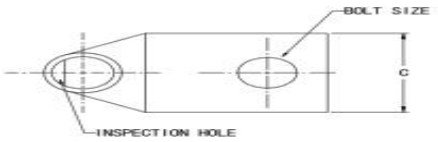

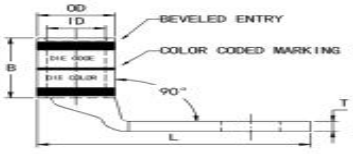
| | | | | |
|---|---|---|---|---|
| Bolt Size | 3/8 | in | 10.0 | mm |
| Tongue Width (C) | 0.83 | in | 21.1 | mm |
| Barrel length (B) | 0.94 | in | 23.9 | mm |
| Overall length (L) | 1.66 | in | 42.2 | mm |
| Outer diameter (OD) | 0.56 | in | 14.2 | mm |
| Inner diameter (ID) | 0.45 | in | 11.4 | mm |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

| | |
|---|---|
| **Electrical Specifications** | |
| Rating - Maximum Voltage | 35KV |
| **Environmental Specifications** | |
| Operating Temperature | -40 °C to +90°C (-40 °F to +212 °F) |
| Storage Temperature | -40 °C to +80 °C (-40 °F to +176 °F) |
| **Packaging and Weights** | |
| Included | Lug |
| Packaging Quantity and UOM | 1 pcs |
| Piece Weight | - lb \| - kg |
| **Certifications and Compliance** | |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS | Compliant |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.