NON-INSULATED BLADE TERMINALS，AWG 22-16 #，Without hole，

TPIN1.25F-18/3.0

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Brazed seam provides a stronger barrel design, minimizes any possible splitting and eliminated folding.**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **The blade-style design is more suitable for compact electrical assemblies.**
- **Bare copper has excellent ductility, ensuring a tighter crimp fit and a stronger, more stable cold-weld connection.**




Product Classification

Model	TPIN1.25F-18/3.0
Part Number	-
Detail Description	NON-INSULATED BLADE TERMINALS，AWG 22-16 #，Without hole，TPIN1.25F-18/3.0

General Specifications

Material	Copper
Tongue Type	Blade
Tongue Angle	Straight
Surface	Tin-plated

Dimensions

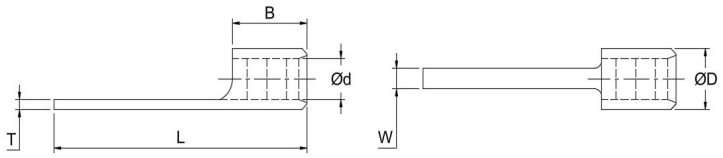

Tongue Width (W)	0.12	in	3.0	mm
Overall Length (L)	0.89	in	22.5	mm
Barrel Length (B)	0.18	in	4.5	mm
Outer Diameter (D)	0.13	in	3.4	mm
Inner Diameter (d)	0.07	in	1.7	mm
Tongue Thickness (T)	0.03	in	0.8	mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.
Revised: JAN 16, 2026
Public

Electrical Specifications	
Rating - Maximum Voltage	35kV
Environmental Specifications	
Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Packaging and Weights	
Included	Lug
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg
Certifications and Compliance	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.