NYLON-INSULATED TWIN CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)，AWG 2*20#，TENY 7510，Nylon-insulated，White，Twin cord

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **Manufactured from seamless tubing;a high quality design with no seams to split.**
- **Parallel design results in only one crimp necessary.**
- **"colour code" colored sheath help choose the right connector.**



Product Classification

Model	TENY 7510
Part Number	-
Detail Description	NYLON-INSULATED TWIN CORD END TERMINAL (APPLY IN FLEXIBLE WIRE)，AWG 2*20#，TENY 7510，Nylon-insulated，White，Twin cord

General Specifications

Color Code	White
Material	Copper
Tongue Type	Tube
Tongue Angle	Straight
Surface	Tin-plated

Dimensions

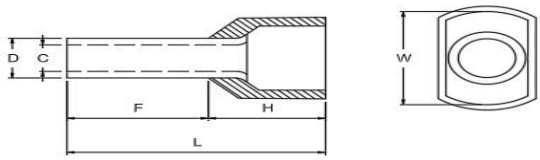

Tongue Length (F)	0.39 in | 10.0 mm
Overall Length (L)	0.70 in | 17.8 mm
Tongue Width (W)	0.22 in | 5.5 mm
Barrel Length (H)	0.31 in | 7.8 mm
Outer Diameter (D)	0.08 in | 2.1 mm
Inner Diameter (C)	0.07 in | 1.8 mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: JAN 16, 2026
Public

Electrical Specifications	
Rating - Maximum Voltage	35KV
Environmental Specifications	
Operating Temperature	-40 °C to +105°C (-40 °F to +221 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Packaging and Weights	
Included	Butt Splice
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg
Certifications and Compliance	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.