BUTT SPLICE DIN 46341，AWG 16-14＃，With wire stop hole，DBNT 2.5，Long barrel

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Positive center wire stops for proper depth of wire insertion.**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **Manufactured from seamless tubing;a high quality design with no seams to split.**
- **Bare copper has excellent ductility, ensuring a tighter crimp fit and a stronger, more stable cold-weld connection.**



Product Classification

Model	DBNT 2.5
Part Number	-
Detail Description	BUTT SPLICE DIN 46341，AWG 16-14＃，With wire stop hole，DBNT 2.5，Long barrel

General Specifications

Material	Copper
Surface	Tin-plated

Dimensions

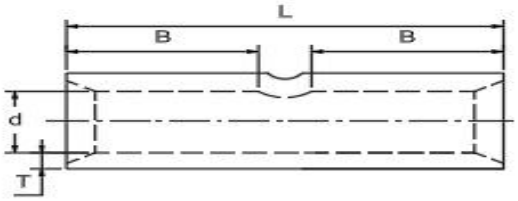

Overall Length (L)	0.59	in	15.0	mm
Barrel Length (B)	0.20	in	5.0	mm
Inner Diameter (d)	0.09	in	2.3	mm
Material Thickness (T)	0.03	in	0.8	mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.
Revised: JAN 16, 2026
Public

Electrical Specifications

Rating - Maximum Voltage	35kV

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)

Packaging and Weights

Included	Butt Splice
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg

Certifications and Compliance

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.