# PARALLEL SPLICE DIN 46341，AWG 250/300 MCM，DPNT 150，Small barrel

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **Manufactured from seamless tubing;a high quality design with no seams to split.**
- **Parallel design results in only one crimp necessary.**
- **Bare copper has excellent ductility, ensuring a tighter crimp fit and a stronger, more stable cold-weld connection.**



## Product Classification

| | |
|---|---|
| Model | DPNT 150 |
| Part Number | - |
| Detail Description | PARALLEL SPLICE DIN 46341，AWG 250/300 MCM，DPNT 150，Small barrel |

## General Specifications

| | |
|---|---|
| Material | Copper |
| Surface | Tin-plated |

## Dimensions

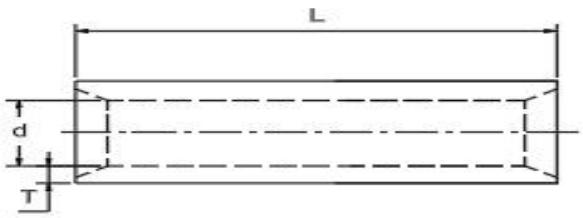


| | |
|---|---|
| Overall Length (L) | 1.02 in \| 26.0 mm |
| Barrel Length (B) | 0.94 in \| 24.0 mm |
| Inner Diameter (d) | 0.75 in \| 19.0 mm |
| Material Thickness (T) | 0.13 in \| 3.2 mm |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.
Revised: JAN 16, 2026
Public

## Electrical Specifications

| | |
|---|---|
| Rating - Maximum Voltage | 35kV |

## Environmental Specifications

| | |
|---|---|
| Operating Temperature | -40 °C to +90°C (-40 °F to +212 °F) |
| Storage Temperature | -40 °C to +80 °C (-40 °F to +176 °F) |

## Packaging and Weights

| | |
|---|---|
| Included | Butt Splice |
| Packaging Quantity and UOM | 1 pcs |
| Piece Weight | - lb \| - kg |

## Certifications and Compliance

| | |
|---|---|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS | Compliant |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.