# NON-INSULATED RING TERMINALS DIN46234，AWG 12-10＃，one hole 1/4 ”，

## DR6-6

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars.**
- **Brazed seam provides a stronger barrel design, minimizes any possible splitting and eliminated folding.**
- **Electro-tin plated for durable, long lasting resistance to corrosion.**
- **Ring tongue design provides a secure termination under screw head that cannot be removed without the complete removal of the screw.**
- **Bare copper has excellent ductility, ensuring a tighter crimp fit and a stronger, more stable cold-weld connection.**



### Product Classification

| | |
|---|---|
| Model | DR6-6 |
| Part Number | - |
| Detail Description | NON-INSULATED RING TERMINALS DIN46234，AWG 12-10＃，one hole 1/4 ”，DR6-6 |

### General Specifications

| | |
|---|---|
| Material | Copper |
| Tongue Type | Ring |
| Tongue Angle | Straight |
| Surface | Tin-plated |

### Dimensions

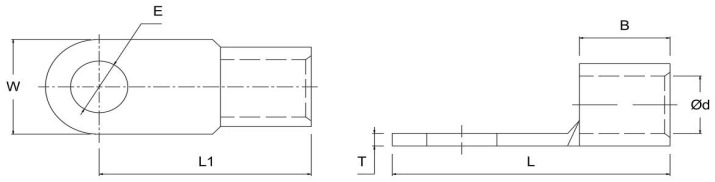


| | | | | |
|---|---|---|---|---|
| STUD SIZE | 1/4 | in | 6.0 | mm |
| Bolt Size (E) | 0.26 | in | 6.5 | mm |
| Tongue Width (W) | 0.43 | in | 11.0 | mm |
| Overall Length (L) | 0.85 | in | 21.5 | mm |
| Copper Wire Length (L1) | 0.63 | in | 16.0 | mm |
| Inner Diameter (d) | 0.14 | in | 3.6 | mm |
| Barrel Length (B) | 0.24 | in | 6.0 | mm |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.
Revised: JAN 16, 2026
Public

## Electrical Specifications

| | |
|---|---|
| Rating - Maximum Voltage | 35kV |

## Environmental Specifications

| | |
|---|---|
| Operating Temperature | -40 °C to +90°C (-40 °F to +212 °F) |
| Storage Temperature | -40 °C to +80 °C (-40 °F to +176 °F) |

## Packaging and Weights

| | |
|---|---|
| Included | Lug |
| Packaging Quantity and UOM | 1 pcs |
| Piece Weight | - lb \| - kg |

## Certifications and Compliance

| | |
|---|---|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS | Compliant |



©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.