NYLON-INSULATED PIGGY BACK DISCONNECTS DOUBLE CRIMP，AWG 12-10#，PBDNYD5.5-250，Nylon-insulated，Yellow，FUNNEL ENTRY

- **Brass cable lugs offer excellent corrosion resistance and mechanical strength**
- **Insulation is locked in place, will not twist off, maintaining proper dielectric values.**
- **"colour code" colored sheath help choose the right connector.**
- **Combination connector allows for more than one connection to a circuit.**



Product Classification

Model	PBDNYD5.5-250
Part Number	-
Detail Description	NYLON-INSULATED PIGGY BACK DISCONNECTS DOUBLE CRIMP，AWG 12-10#，PBDNYD5.5-250，Nylon-insulated，Yellow，FUNNEL ENTRY

General Specifications

Color Code	Yellow
Material	Brass
Tongue Type	Piggy back
Tongue Angle	Straight
Surface	Tin-plated

Dimensions

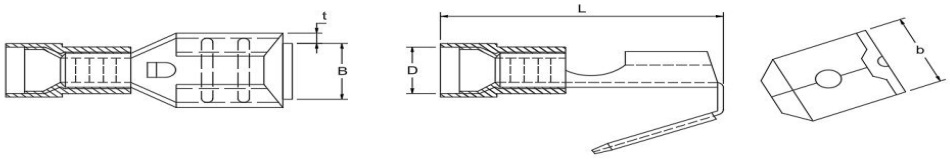

TAB SIZE	6.4*0.8
Outer Diameter (D)	0.26 in | 6.6 mm
Female Tongue Width (B)	0.26 in | 6.7 mm
Overall Length (L)	1.02 in | 26.0 mm
Male Tongue Width (b)	0.25 in | 6.4 mm
Material Thickness (t)	0.02 in | 0.4 mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: JAN 16, 2026
Public

Electrical Specifications	
Rating - Maximum Voltage	600V
Environmental Specifications	
Operating Temperature	-40 °C to +105°C (-40 °F to +221 °F)
Storage Temperature	-40 °C to +80°C (-40 °F to +176 °F)
Packaging and Weights	
Included	Lug
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg
Certifications and Compliance	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.