DATASHEET

NYLON-INSULATED RING TERMINALS，AWG 22-16#，one hole 5/16”，DRNY2.5-1B，Nylon-insulated，Red

- **Copper cable lugs are designed for connecting copper cables, coils and Bus-bars**
- **Ring tongue design provides a secure termination under screw head that cannot be removed without the complete removal of the screw.**
- **The barrel length has been designed to allow easy and accurate positioning of the dies during the crimping operation.**
- **Insulation is locked in place, will not twist off, maintaining proper dielectric values.**
- **"colour code" colored sheath help choose the right connector.**



Product Classification

Model	DRNY2.5-1B
Part Number	-
Detail Description	NYLON-INSULATED RING TERMINALS，AWG 22-16#，one hole 5/16”，DRNY2.5-1B，Nylon-insulated，Red

General Specifications

Color Code	Red
Material	Copper
Tongue Type	Ring
Tongue Angle	Straight
Surface	Tin-plated

Dimensions

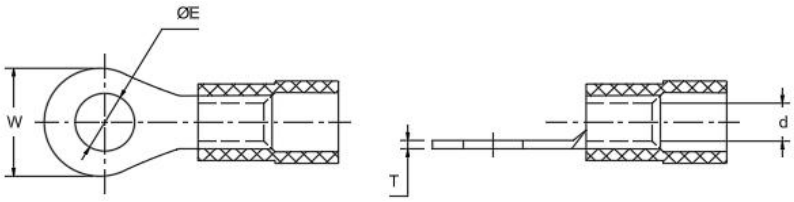

STUD SIZE	#3	in	2.5	mm
Bolt Size (E)	0.11	in	2.7	mm
Tongue Width (W)	0.24	in	6.0	mm
Inner Diameter (d)	0.06	in	1.6	mm
Tongue Thickness (T)	0.03	in	0.8	mm

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: JAN 16, 2026
Public

Electrical Specifications	
Rating - Maximum Voltage	35KV
Environmental Specifications	
Operating Temperature	-40 °C to +105°C (-40 °F to +221 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Packaging and Weights	
Included	Lug
Packaging Quantity and UOM	1 pcs
Piece Weight	- lb | - kg
Certifications and Compliance	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

©ZLX TERMINALS Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.