



Instructions

TP401

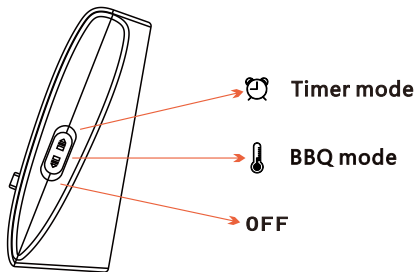

①



②

- ① ST/SP
 - BBQ mode: Meat settings/Temperature settings
 - Timer mode: Start/Pause
- ② HOUR
 - BBQ mode: Meat selection/Increase in value
 - Timer mode: Increase in hours
- ③ MIN
 - BBQ mode: Meat selection/Decrease in value
 - Timer mode: Decrease in hours
- ④
 - Click: Backlight on
 - Hold down for 2 S: °C/°F Switch

Timer mode: ②—③ Press at the same time to clear the value

Features:

Built-in seven meat barbecue modes

Time alarm & Temperature alarm

Backlight on time 8 seconds


Temperature range: $-50^{\circ}\text{C} \sim 300^{\circ}\text{C}$ ($-58^{\circ}\text{F} \sim 572^{\circ}\text{F}$)

Resolution: $1^{\circ}\text{C}/^{\circ}\text{F}$

Power Supply: 1.5V AAA*2PCS

③

Two strong magnets



WARNING

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- In order to extend the service life, do not use the probe completely immersed in water
- Please use the metal bracket to support the probe when grilling
- Don't expose probe or probe wire to open flames or barbeque.
- If using the probe lower than -50°C (-58°F) it will display "LLL"
- If using the probe higher than 300°C (572°F), it will display "HHH"

④

MADE IN CHINA

