
Fuseholder **ANS-400**

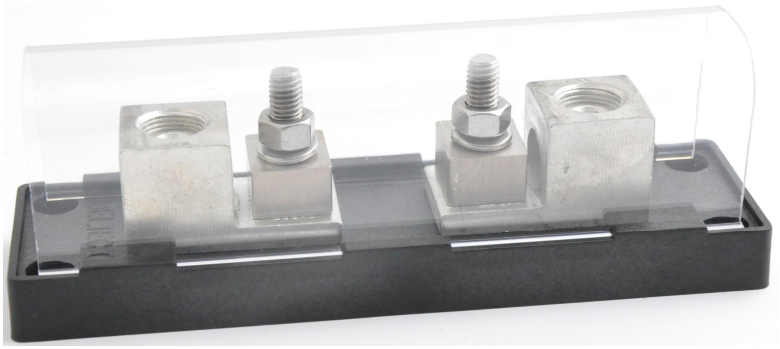

58VDC Max400A


RoHS

References
Weblinks
pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Technical Data

Fuse-Link	Type T fuse
Mounting	Fixing Nut
Rated Voltage	58VDC
Rated Current	Max 400A
Material: Shell	Glass fiber reinforced nylon UL 94V0
Material: Cover	Polycarbonate UL 94V0
Terminal Block	Nickel-plated brass (accepts #6 - 250 MCM wire gauges)
Hardware	Stainless steel
Nut torque	Max 10Nm
Dielectric Strength (Terminal Block to Base)	750 VDC
Operating Temperature	-40℃to+60℃
Unit Weight	291g
Storage Conditions	-55℃ to +80℃,
Product Marking	Type, Voltage, Current, Approvals

Abmessungen

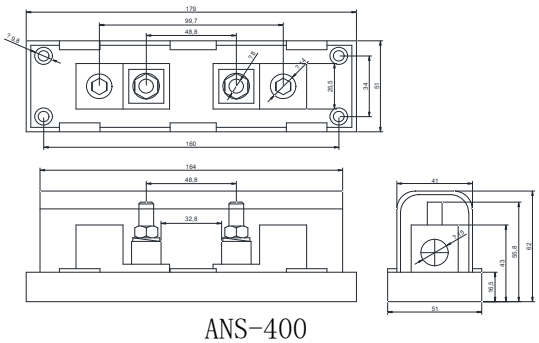

ANS-400