
Fuseholder **ANS-800A/B**



ANS-800A

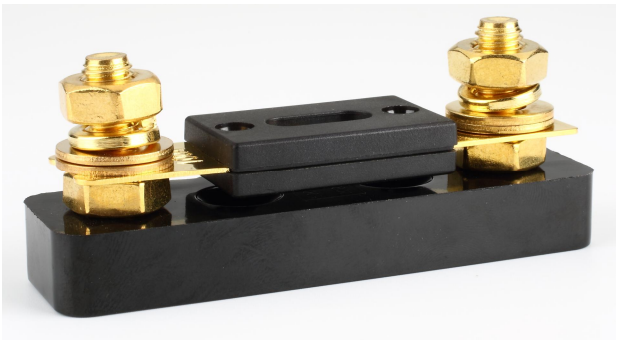

ANS-500B

58VDC Max800A


RoHS


References
Weblinks
pdf, General Product Information, Approvals, RoHS, CHINA-RoHS


Technical Data

Fuse-Link	Plastic fuse
Mounting	Fixing Nut
Rated Voltage	58VDC
Rated Current	Max 800A
Material: Shell	A:Phenolic resin UL 94V0
	B:Glass fiber reinforced nylon UL 94V0
Screw:	8.8 grade nickel plating
Nut torque	Max 10Nm
Dielectric Strength (Terminal Block to Base)	750 VDC
Admissible Ambient Air Tem	-40℃to85℃
Unit Weight (Socket/Cap)	94.3 g / 24.2g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals


Abmessungen

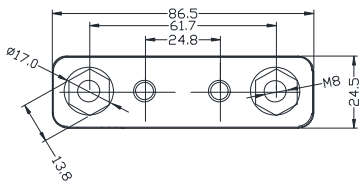





ANS-800A

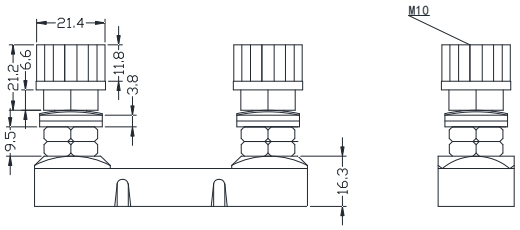

ANS-800B