Fuseholder Hinew Electric Co., Ltd. FHB02/H3-11A/B（H3）

Shock-Safe Fuseholder, 5 x 20 ,



FHB02



H3-11

Description

- Quick-conntect or solder terminals

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

- VDE Certificate Number: 134125
' UL File Number: E239034

References

Weblinks


pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Technical Data


Shocksafe Category	PC2	Soldering Methods	Iron
Fuse-Link	5 x 20mm	Solderability	350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2
Mounting	Panel Mount, Front-Side		
Mounting	Fixing Nut	Resistance to Soldering Heat	350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2
Terminal	Solder or Quick-Connect 4.0 x 0.5 mm		
Rated Voltage	250VAC	Contact Resistance	< 5mΩ at 20 mV
Rated Current	2.5W10A (VDE), 10A (UL)	Dielectric Strength	> 3kV between L-N
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23℃		> 4kV between L/N-PE
	Admissible power acceptance at hig her ambient temperature see derating curves		(50Hz; 1 min)
		Impulse Withstand Voltage	> 4kV between L-N
			> 6kV between L/N-PE
Degree of Protection	IP 40	Insulation Resistance	> 10MΩ between L-N
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140		> 100MΩ between L/N-PE (500VDC; 1 min)
Admissible Ambient Air Temp	-40℃to85℃	Overvoltage Category	I - III acc. to IEC 60664-1
Climatic Category	40/085/21 acc. to IEC 60068-1	Pollution Degree	1 - 3 acc. to IEC 60664-1
Material: Socket	thermosetting, black, UL 94V-0	Admissible Torque on Fixing Nut	max 1.2Nm
Material: Terminals	Nickel plated copper	Panel Thickness s	max 7mm
Unit Weight	3 g /3.6 g/2.8g/3.5/2.2g/2.4g		
Storage Conditions	0℃ to 60℃, max. 70% r.h.		
Product Marking	Type, Voltage, Current, Approvals		

Hinew Electric Co., Ltd.

Abmessungen

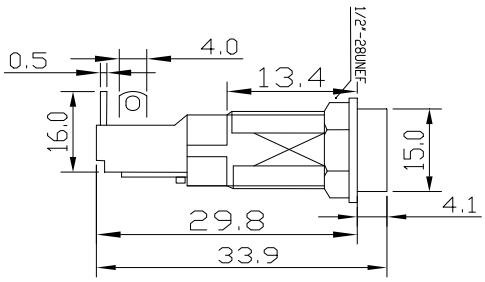


H3-02

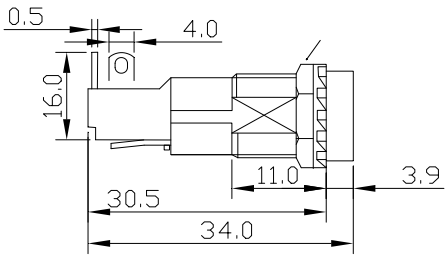



H3-11

Mounting holes



Derating Curves

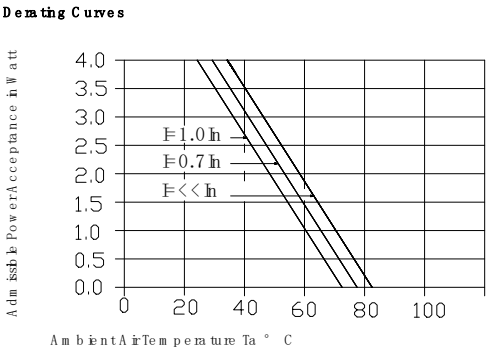

Optional accessories		Description
11TG		plug-in cap
11BTG		screw cap
11XLM		metal nut
02LM		02 Nut

Hinew Electric Co., Ltd.

11LM		11 Nuts
02DP		meson (black)
11DP		Meson (white)
03JQ		waterproof rubber ring Waterproof grade after installation: IP67