Hinew Electric Co., Ltd.

Fuseholder H3-03A/B/C/D(H3)

Shock-Safe Fuseholder, 5 x 20 ,



H3-03A



H3-03B
(H3-89)



H3-03C/H3-75



H3-03D

Description

wire connection

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

- VDE Certificate Number: 134125
' UL File Number: E239034

Technical Data

Shocksafe Category	PC2
Fuse-Link	A,B,C:5 x 20mm D:6x30
Mounting	lead type installation
Terminal	riveting
Rated Voltage	250VAC
Rated Current	2.5W10A (VDE), 10A (UL)
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23℃
	Admissible power acceptance at hig her ambient temperature see derating curves
Degree of Protection	IP 67
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Admissible Ambient Air Temp	-40℃to85℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	thermosetting, black, UL 94V-0
Material: Terminals	brass
Unit Weight (A/B/C/D)	2.8 g / 4.3 g/2.5g/2.73g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	, Type, Voltage, Current, Approvals

Contact Resistance	< 5mΩ at 20 mV
Dielectric Strength	> 3kV between L-N
	> 4kV between L/N-PE
	(50Hz; 1 min)
Impulse Withstand Voltage	> 4kV between L-N
	> 6kV between L/N-PE
Insulation Resistance	> 10MΩ between L-N
	> 100MΩ between L/N-PE
	(500VDC; 1 min)
Overvoltage Category	I - III acc. to IEC 60664-1
Pollution Degree	1 - 3 acc. to IEC 60664-1

Hinew Electric Co., Ltd.

Specifications

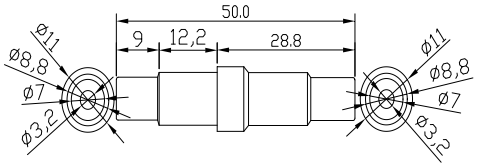

H3-03A

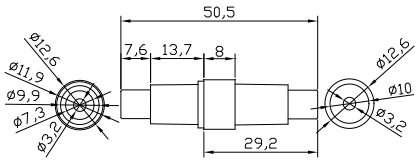

H3-03B(H3-89)

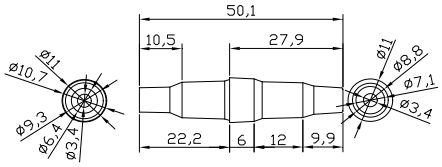

H3-03C

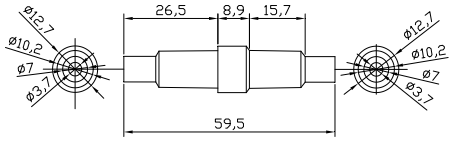

H3-03D

Derating Curves

Derating Curves

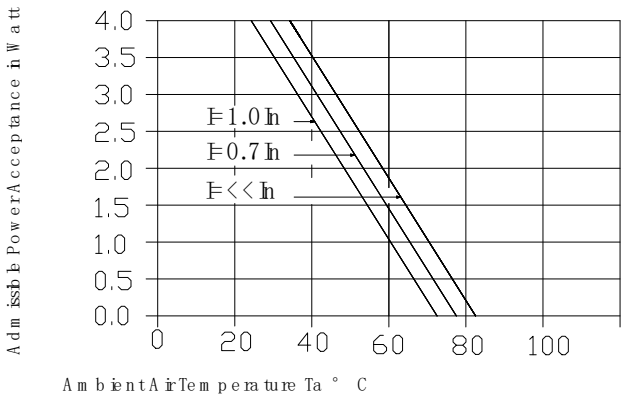

Optional accessories		Description
03JQ		waterproof rubber ring Waterproof grade after installation: IP67
protective case		Add protective cover and waterproof ring to reach IP67
EP520		Ear pads Brass
03TH		spring

Wire length, color and diameter can be customized upon request.
Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.