Fuseholder Hinew Electric Co., Ltd. H3-05, (H3)

Shock-Safe Fuseholder, 5 x 20mm ,



H3-05

250VAC 2.5W/10A

Description

wire connection

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store,

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals


- VDE Certificate Number: 134125
' UL File Number: E239034

Technical Data


Shocksafe Category	PC2	Contact Resistance	< 5mΩ at 20 mV
Fuse-Link	5 x 20mm	Dielectric Strength	> 3kV between L-N
Mounting	lead type installation		> 4kV between L/N-PE
Terminal	riveting		(50Hz; 1 min)
Rated Voltage	250VAC	Impulse Withstand Voltage	> 4kV between L-N
Rated Current	2.5W10A (VDE), 10A (UL)		> 6kV between L/N-PE
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23℃	Insulation Resistance	> 10MΩ between L-N
	Admissible power acceptance at hig her ambient temperature see derating curves		> 100MΩ between L/N-PE (500VDC; 1 min)
		Overvoltage Category	I - III acc. to IEC 60664-1
Degree of Protection	IP 67	Pollution Degree	1 - 3 acc. to IEC 60664-1
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140		
Admissible Ambient Air Temp.	-40℃to85℃		
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Socket	Thermoplastic plastic White UL94V-0		
Material: Terminals	brass		
Unit Weight	2.3 g		
Storage Conditions	0℃ to 60℃, max. 70% r.h.		
Product Marking	Type, Voltage, Current, Approvals		


Hinew Electric Co., Ltd.

Specifications

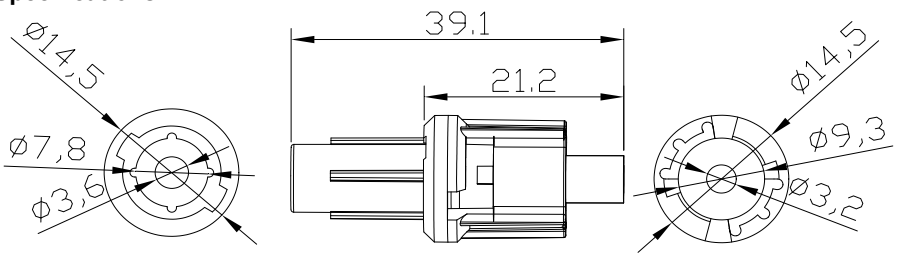

Derating Curves

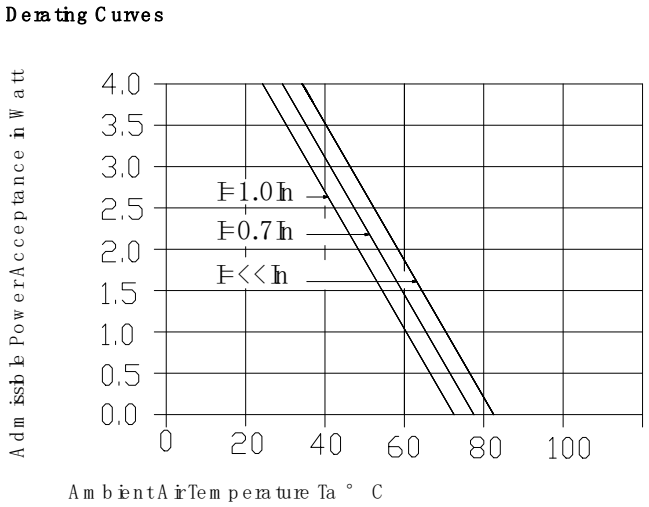

Required Accessory		Description
EP520		Ear pads Brass
07TH		spring
Wire		Optional 16#-22#AWG

Wire length, color and diameter can be customized upon request. Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.