Hinew Electric Co., Ltd.

Fuseholder H3-06A/B, (H3)

Shock-Safe Fuseholder, 6 x 30mm ,

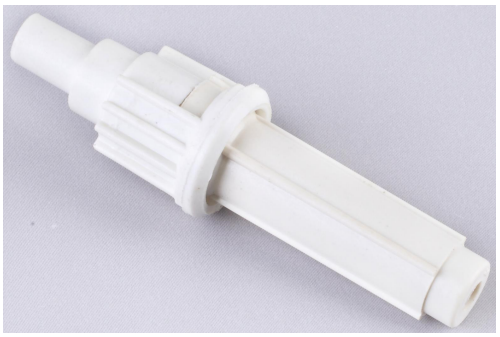

H3-05

250VAC 10A /500VAC 15A

Description

wire connection

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

' UL File Number: E239034

Technical Data

Shocksafe Category	PC2
Fuse-Link	6 x 30 mm
Mounting	lead type installation
Terminal	riveting
Rated Voltage	250VAC
Rated Current	10A (UL)
Degree of Protection	IP 40
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Admissible Ambient Air Temp	-40℃to85℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic plastic White UL94V-0
Material: Terminals	brass
Unit Weight A/B	3.17g/5.56g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Contact Resistance	< 5mΩ at 20 mV
Dielectric Strength	> 3kV between L-N > 4kV between L/N-PE (50Hz; 1 min)
Impulse Withstand Voltage	> 4kV between L-N > 6kV between L/N-PE
Insulation Resistance	> 10MΩ between L-N > 100MΩ between L/N-PE (500VDC; 1 min)
Overvoltage Category	I - III acc. to IEC 60664-1
Pollution Degree	1 - 3 acc. to IEC 60664-1

Specifications Hinew Electric Co., Ltd.

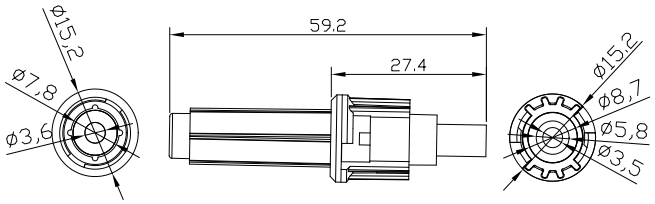

Derating Curves

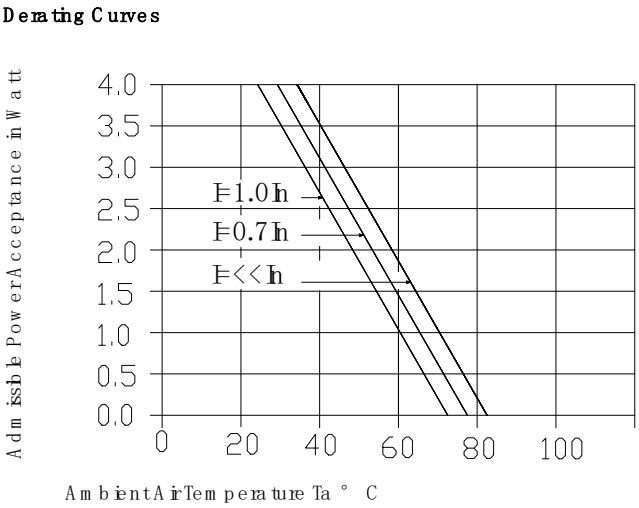

Required Accessory		Description
EP6300	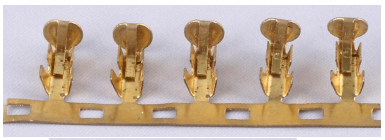	Ear pads Brass
07TH		spring
Wire		Optional 16#-22#AWG

Wire length, color and diameter can be customized upon request. Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.