
ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT Is CONSIDERED CONFIDENTIAL AND PROPRIETARY BY HINEW ELECTRIC APPLIANCE CO.,LTD. ALL DESIGN MANUFACTURING. USE. REPRODUCTION.AND ALL SALES RIGHTS. ARE EXPRESSLY RESERVED BY AND TO HINEW ELECTRIC APPLIANCE CO.,LID. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRANING REVISIONS				
REV	S/N	OESCRIPTION	APPROVED	DATE
B				



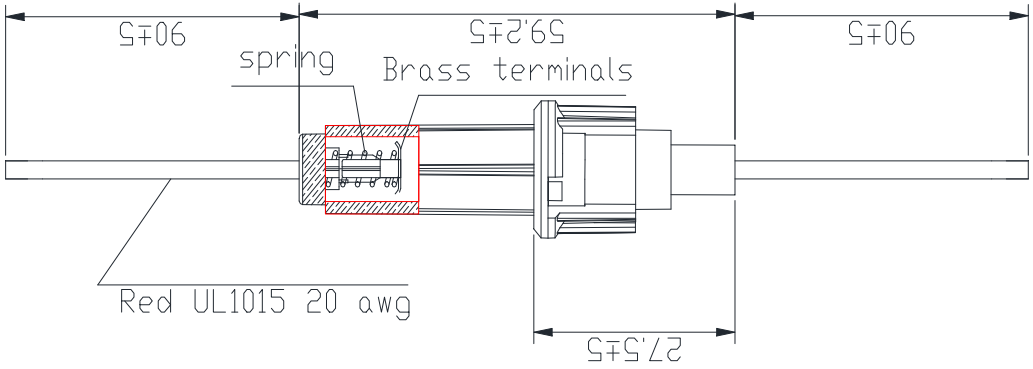

保险丝座内部线长28mm

NOTES: UNLESS OTHERWISE SPECIFIED

1. Electrical Rating: Max 10A 250VAC
2. Fuse : 6*30mm
3. Insulation Resistance At 500vdc: Min100MΩ
4. Dielectric Strength: Min AC 2000V
5. Insulating Boby: Nylon
6. Flame retardant level: UL94V0
7. Contacts: Brass
8. Red lead UL1015 20AWG.

HINEW ELECTRIC CO.,LTD				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERENCE DECIMALS ANGULAR x±0.5 ±2° xx±0.25 DO NOT SCALE DRAWING	NAME	FUSEHOLDER	DATA	
			REVIEW	
	MODEL	H3-6C		
	DRAWING	HUANG	UNIT	mm
File NO. 1803006		NO		