Hinew Electric Co., Ltd.

Fuseholder H3-12A/B/C/D/E/H3-26, H3-57 (H3)

Shock-Safe Fuseholder, 5 x 20 ,




H3-12A/C



H3-12B/D



H3-12E



H3-57



H3-26

Description

- Quick-conntect or solder terminals

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals


- VDE Certificate Number: 134125
' UL File Number: E239034

Technical Data


Shocksafe Category	PC2	Soldering Methods	Soldering
Fuse-Link	5 x 20mm	Solderability	350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2
Mounting	Panel Mount, Front-Side		
Mounting	Fixing Nut	Resistance to Soldering Heat	350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2
Terminal	Solder or Quick-Connect 4 x 0.5mm 4.8 x 0.5mm		
Rated Voltage	250VAC	Contact Resistance	< 5mΩ at 20 mV
Rated Current	10A (VDE), 10A (UL)	Dielectric Strength	> 3kV between L-N
Rated Power	2.5W / 10A @ Ta 23℃		> 4kV between L/N-PE (50Hz; 1 min)
Rated Power Acceptance IEC	Admissible power acceptance at hig her ambient temperature see derating curves	Impulse Withstand Voltage	> 4kV between L-N
			> 6kV between L/N-PE
Degree of Protection	IP 40	Insulation Resistance	> 10MΩ between L-N
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140		> 100MΩ between L/N-PE (500VDC; 1 min)
Admissible Ambient Air Temp	-40℃to85℃	Overvoltage Category	I - III acc. to IEC 60664-1
Climatic Category	40/085/21 acc. to IEC 60068-1	Pollution Degree	1 - 3 acc. to IEC 60664-1
Material: Socket	Thermosetting plastic , black, UL 94V-0	Admissible Torque on Fixing Nut	max 1.2Nm
Material: Terminals	nickel plated brass		
Unit Weight (Socket/Cap)	3.1 g / 3.4 g	Panel Thickness s	max 7mm
Storage Conditions	0℃ to 60℃, max. 70% r.h.		
Product Marking	, Type, Voltage, Current, Approvals		

Specifications


Hinew Electric Co., Ltd.

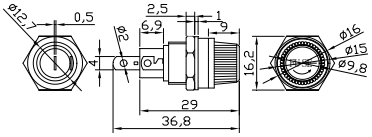


H3-12A/E

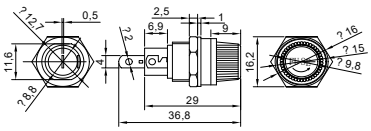

H2-12B

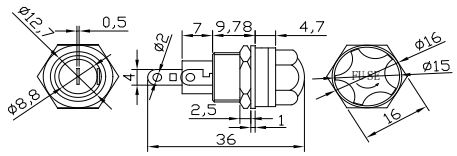


H3-26




H3-57

Mounting holes




H3-12A/12C/57/26



H3-12B/D/E/26

Derating Curves

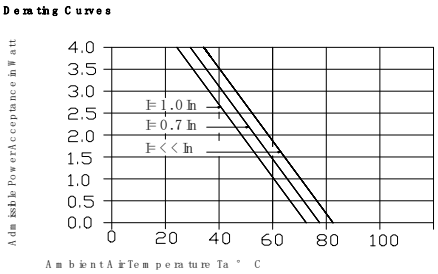

Optional accessories		Description
12ATG		Screw-on head cap fits H3-12A/B/C
12ETG		Screw-on head cap fits H3-12E
26TG		Screw-on head cap fits H3-26
57TG		Snap-on head cover for H3-57
11DP		Optional
11XLM		Optional
12JQ		With 12JQ rear panel protection grade IP67