Hinew Electric Co., Ltd.

Fuseholder

PCB mount

H3-24,24A(H3)

Shock-Safe Fuseholder, 5 x 20mm ,





图片

250VAC 10A

Description

- Quick-conntect or solder terminals

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

- VDE Certificate Number: 134125
' UL File Number: E239034

References

Weblinks


pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

Technical Data


Shocksafe Category	PC2	Soldering Methods	Soldering
Fuse-Link	5 x 20mm	Solderability	350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2
Mounting	pcb board installation		
Terminal	Solder	Resistance to Soldering Heat	350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated Voltage	250VAC		
Rated Current	10A (UL)	Contact Resistance	< 5mΩ at 20 mV
Rated Power Acceptance IEC	4W / 10A @ Ta 23℃	Dielectric Strength	> 3kV between L-N
	Admissible power acceptance at hig her ambient temperature see derating curves		> 4kV between L/N-PE (50Hz; 1 min)
		Impulse Withstand Voltage	> 4kV between L-N
Degree of Protection	IP 40		> 6kV between L/N-PE
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140	Insulation Resistance	> 10MΩ between L-N
			> 100MΩ between L/N-PE (500VDC; 1 min)
Admissible Ambient Air Temp	-40℃to85℃		
Climatic Category	40/085/21 acc. to IEC 60068-1	Overvoltage Category	I - III acc. to IEC 60664-1
Material: Socket	thermosetting, black, UL 94V-0	Pollution Degree	1 - 3 acc. to IEC 60664-1
Material: Terminals	Tin-Plated Copper Alloy	PCB board thickness	max3.5mm
Unit Weight (Socket/Cap)	3.56 g / 1.5 g		
Storage Conditions	0℃ to 60℃, max. 70% r.h.		
Product Marking	Type, Voltage, Current, Approvals		

Hinew Electric Co., Ltd.

Abmessungen

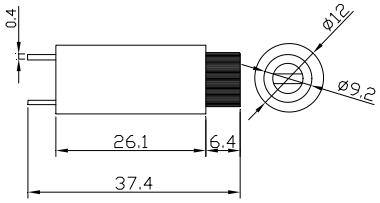


H3-24

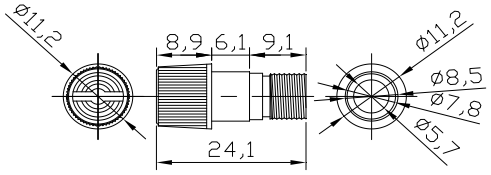


H3-24A

Mounting holes



Derating Curves

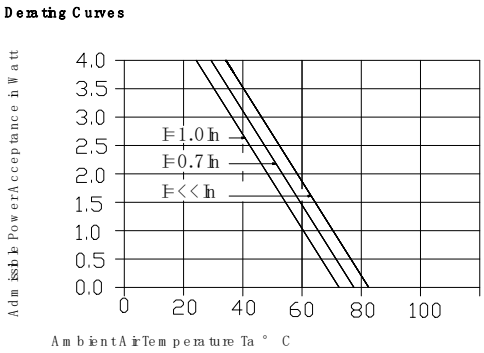

Optional accessories		Description
24ATG		Screw-in head cover
24TG		Snap-on head cover