
Hinew Electric Co., Ltd.

Fuseholder H3-50A/B/56A/B(H3)

PCB mount

Shock-Safe Fuseholder, 5 x 20mm ,




H3-50A



H3-50B



H3-56A

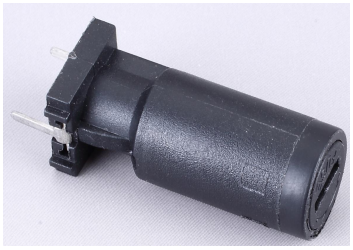

H3-56B

图片

250VAC 2.5W/10A

Description

- Quick-conntect or solder terminals

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store,

Standards

IEC60127-6

UL4248-1/UL512

GB9364.6

Approvals

- VDE Certificate Number: 134125


' UL File Number: E239034

Technical Data


Shocksafe Category	PC2	Soldering Methods	Soldering
Fuse-Link	5 x 20mm	Solderability	350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2
Mounting	PCB mount		
Terminal	Solder	Resistance to Soldering Heat	350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated Voltage	250VAC		
Rated Current	2.5W10A (VDE), 20A (UL)	Contact Resistance	< 5mΩ at 20 mV
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23℃ Admissible power acceptance at hig her ambient temperature see derating curves	Dielectric Strength	> 3kV between L-N > 4kV between L/N-PE (50Hz; 1 min)
		Impulse Withstand Voltage	> 4kV between L-N > 6kV between L/N-PE
Degree of Protection	IP 40		
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140	Insulation Resistance	> 10MΩ between L-N > 100MΩ between L/N-PE (500VDC; 1 min)
Admissible Ambient Air Temp	-40℃to85℃		
Climatic Category	40/085/21 acc. to IEC 60068-1	Overvoltage Category	I - III acc. to IEC 60664-1
Material: Socket/cap	Thermoplastic, black, UL 94V-0	Pollution Degree	1 - 3 acc. to IEC 60664-1
Material: Terminals	Tin-Plated Copper Alloy	PCB board thickness	max3.5mm
Unit Weight (Socket/Cap)	3.21 g / 2.37 g		
Storage Conditions	0℃ to 60℃, max. 70% r.h.		
Product Marking	Type, Voltage, Current, Approvals		

Specifications


Hinew Electric Co., Ltd.

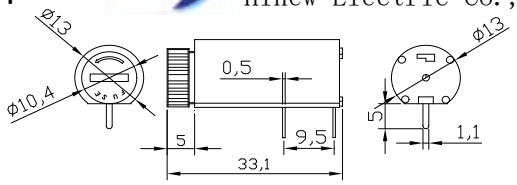


H3-50A

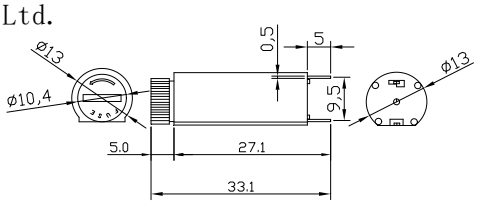

H3-50B

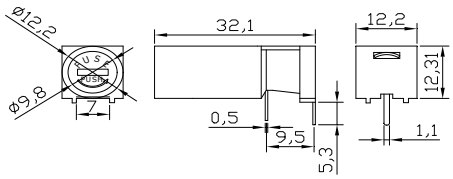


H3-56A

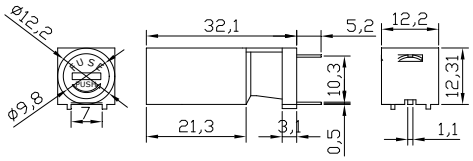


H3-56B

Mounting holes

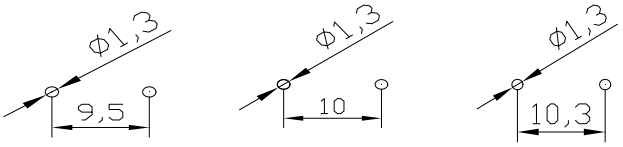

H3-50A/56A H3-50B H3-56B

Derating Curves

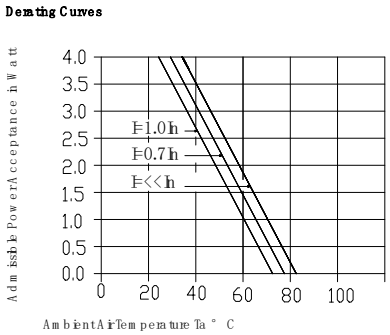

Optional accessories		Description
50TG		Snap-on head cover for H3-50A/B
56TG		Snap-on head cover for H3-56A/B