Hinew Electric Co., Ltd.

H3-64

Harness Fuse Holder（10x38mm）



600V30A

Description

- Inline Fuseholde

Applications

- Automotive applications/aftermarket
New Energy Application/Aftermarket
Solar Power Applications/Aftermarket


Weblinks

pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop

Technical Data


Shock-Safe Category	PC2
Fuse-Link	1 0 x 3 8 m m
Mounting	In-line
Terminal	Wires
Rated Voltage	600VAC 30A
Rated current	30A
Rated Power Acceptance	IEC
Degree of Protection	IP67
Admissible Ambient Air Temp.	-40° C to +85° C
Material: Socket	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Brass
Storage Conditions	0° C to 60° C, max. 70% r.h.
Contact Resistance	< 5mΩ at 20 mV

Abmessungen

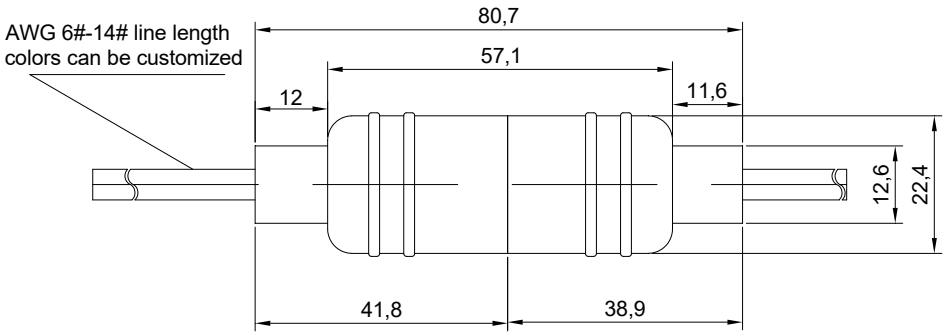

Hinew Electric Co., Ltd.

Mounting Instruction

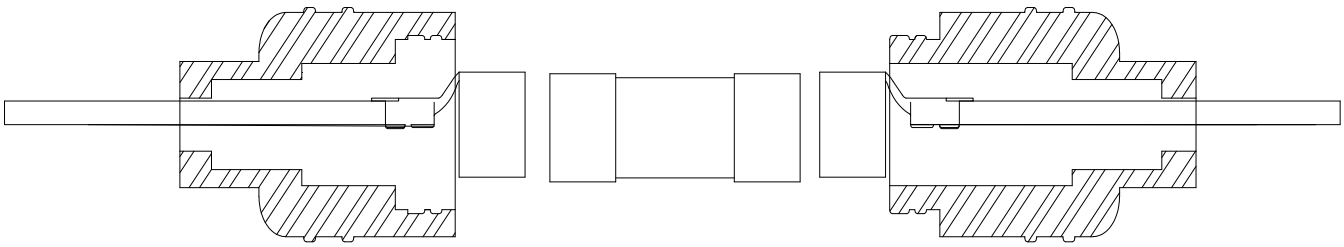

端子



Wire length, color and diameter can be customized upon request.
Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.