
Fuseholder

H3-7A/B/C(H3-32)

Shock-Safe Fuseholder, A,C(H3-32):6.3 x 32 mm,B:10 X 38mm



H3-07A
250VAC10A



H3-07B
250VAC30A



H3-07C（H3-32）
250VAC15A

Description

Wire terminal machine riveting

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

Approvals


' UL File Number: E239034

Technical Data


Shocksafe Category	PC2
Fuse-Link	A/C: 6 x 30mm B:10 x 38mm
Mounting	lead type installation
Terminal	riveting
Rated Voltage	250VAC
Rated Current	10A,30A
Degree of Protection	IP 40
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Admissible Ambient Air Tem	-40℃to85℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermosetting, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (Socket A/B)	7.6 g / 13.81 g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Contact Resistance	< 6mΩ at 30 mV
Dielectric Strength	> 3kV between L-N > 4kV between L/N-PE (50Hz; 1 min)
Impulse Withstand Voltage	> 4kV between L-N > 6kV between L/N-PE
Insulation Resistance	> 10MΩ between L-N > 100MΩ between L/N-PE (500VDC; 1 min)
Overvoltage Category	I - III acc. to IEC 60664-1
Pollution Degree	1 - 3 acc. to IEC 60664-1


Specifications





H3-07A



H3-07B

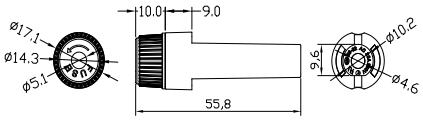

H3-07C(H3-32)

Required Accessory		Description
terminal		H3-7A/C terminal
spring		T3-7B terminal
07TH		H3-7A/C spring
7BTH		H3-7B spring

Wire length, color and diameter can be customized upon request.
Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.