
Fuseholder **H3-80**

car fuse holder

car waterproof fuse holder mini fuse

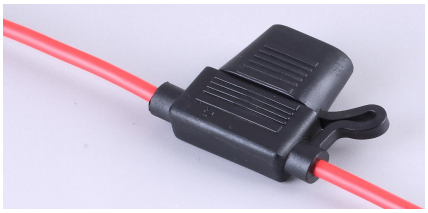

H3-80

32VDC 30A

Description

For ATO-Mini Fuse

References


Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Technical Data

Shocksafe Category	PC2
Fuse-Link	MINI safety pin
Rated Voltage	32VDC
Rated Current	1-30A
Degree of Protection	IP 67
Wire:	2.5-6mm(12-10AWG), wire length optional
Admissible Ambient Air Temp.	-10℃to80℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (Socket/Cap)	10.88g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Abmessungen

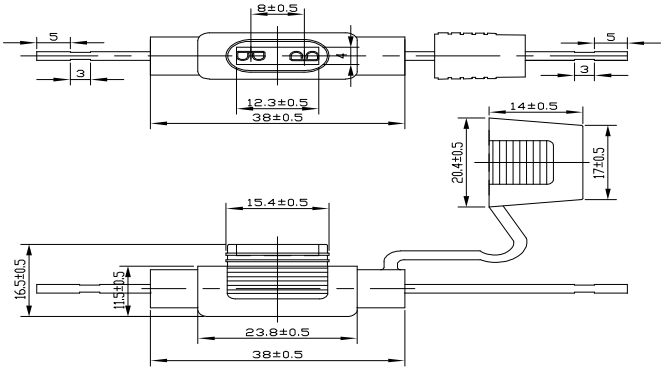

Wire length, color and diameter can be customized upon request. Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.