
Fuseholder H3-81A, B, C

car fuse holder

Waterproof Fuse Holder for Vehicles Medium Fuse





H3-80A H3-81B H3-81C

32VDC 1-40A

References


Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Technical Data

Shocksafe Category	PC2
Fuse-Link	Medium Fuse
Rated Voltage	32VDC
Rated Current	1-40A
Degree of Protection	IP 67
Wire:	2.5-6mm(12-10AWG), wire length optional
Admissible Ambient Air Temp.	-10℃to80℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Pull-out Force min.	Butt Splice connectors pull-out force min. 15kg.
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (A/B/C)	18.4g/20.16g/16.35g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Abmessungen

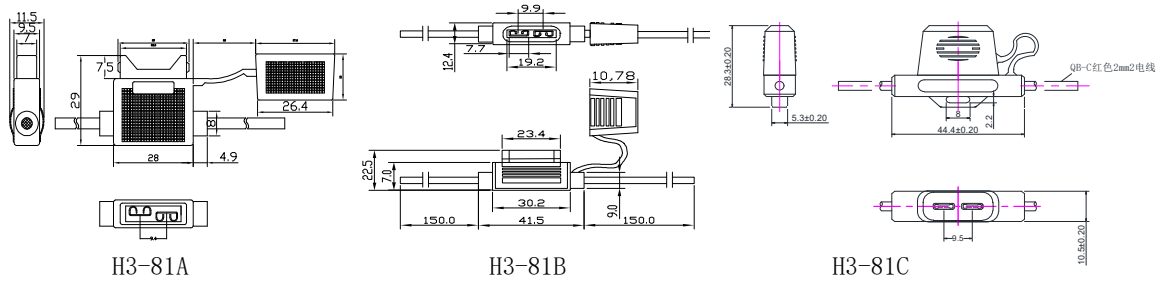

H3-81A H3-81B H3-81C

Wire length, color and diameter can be customized upon request. Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.