
Fuseholder H3-84A,B

car fuse holder

Waterproof Fuse Holder for Vehicles Large size Fuse



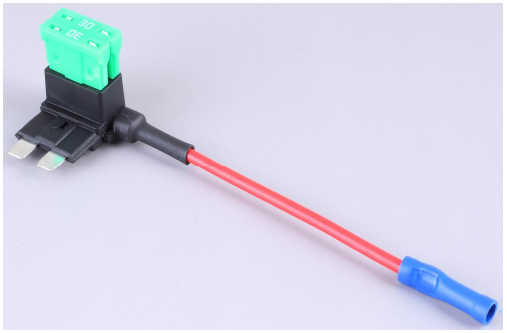

36VDC 15A

References


Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS,

Technical Data

Shocksafe Category	PC2
Fuse-Link	A:Medium Fuse B:Mini Fuse
Rated Voltage	36VDC
Rated Current	15A
Degree of Protection	IP40
Wire:	16AWG, wire length optional
Admissible Ambient Air Ter	-10℃to80℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Pull-out Force min.	Butt Splice connectors pull-out force min. 15kg.
Unit Weight (A/B)	25.5g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Abmessungen

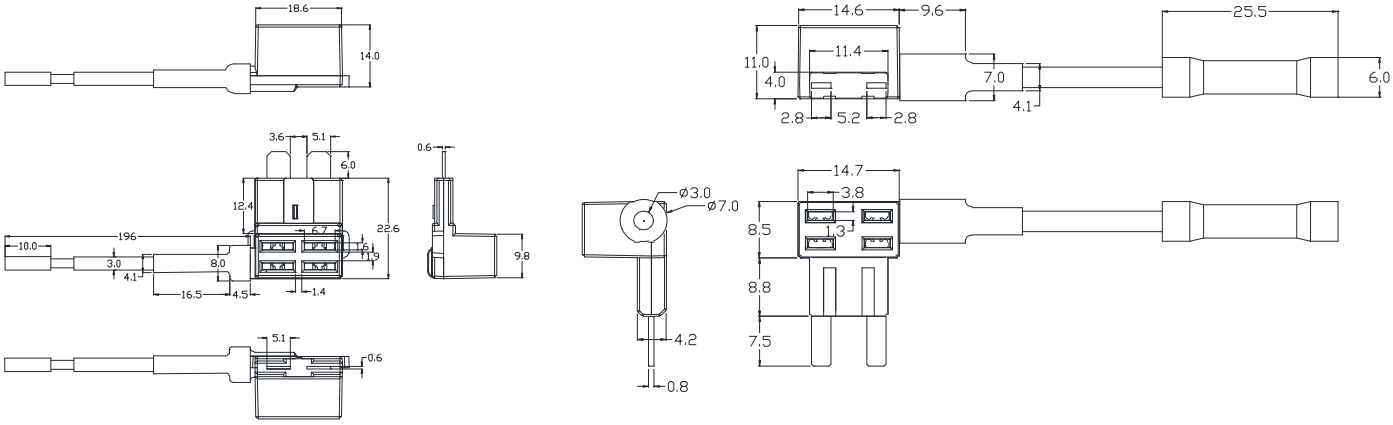

Wire length, color and diameter can be customized upon request. Customization requires minimum order quantities depending on nature of modifications. Please contact your sales representative for details.