HUIZHOU HINEW ELECTRIC APPLIANCE CO LTD

SPECIFICATION FOR APPROVAL

Fuseholder H3-19A/B

Shock-Safe Fuseholder, 5 x 20 / 6.3 x 32 mm, Slot



H3-19A



H3-19B

250VAC 16A

Description

- Quick-conntect or solder terminals

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

' UL File Number: E239034

References

Weblinks


pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

Technical Data


Shocksafe Category	PC2
Fuse-Link	5 x 20 or 6.3 x 32mm
Mounting	Panel Mount, Front-Side
Mounting	Fixing Nut
Terminal	Solder or Quick-Connect 4.8 x 0.5 mm
Rated Voltage	250VAC
Rated Current	15A
Degree of Protection	IP 40
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Admissible Ambient Air Temp.	-40℃to85℃
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (Socket/Cap)	6.1 g / 2.32 g
Storage Conditions	0℃ to 60℃, max. 70% r.h.
Product Marking	Type, Voltage, Current, Approvals

Soldering Methods	Iron
Solderability	350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2
Resistance to Soldering Heat	350℃ / 10sec acc. to IEC 60068-2-20 Test Tb, method 2
Contact Resistance	< 5mΩ at 20 mV
Dielectric Strength	> 3kV between L-N > 4kV between L/N-PE (50Hz; 1 min)
Impulse Withstand Voltage	> 4kV between L-N > 6kV between L/N-PE
Insulation Resistance	> 10MΩ between L-N > 100MΩ between L/N-PE (500VDC; 1 min)
Overvoltage Category	I - III acc. to IEC 60664-1
Pollution Degree	1 - 3 acc. to IEC 60664-1
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 7mm


Abmessungen

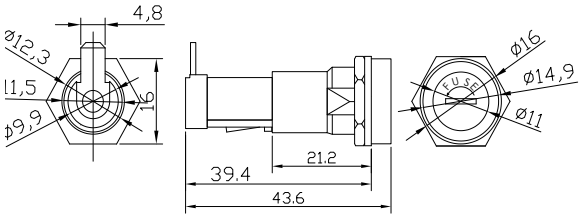

H3-19A

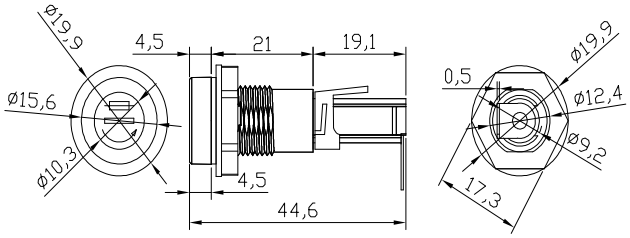


H3-19B

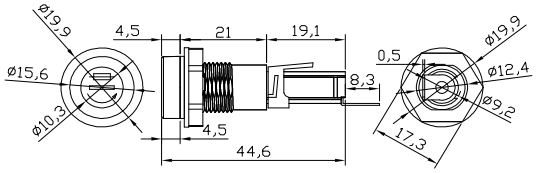


H3-19B

Mounting holes





H3-19A



H3-19B

Optional accessories		Description
9BTG		Snap-on head cover for H3-19A-1
9CTG		Screw-on head cap fits H3-19A-2
9ATG		Snap-on head cover for H3-19A-3
19ATG		Snap-on head cover for H3-19B-1

19BTG		Snap-on head cover for H3-19B-2
28TG		Snap-on head cover for H3-19A-3
19SLM		Plastic nut(optional)
11DP		spacer white(optional)
11XLM		metal nut(optional)
19DP		spacer black(optional)