Hinew Electric Co., Ltd.

Fuseholder H3-22

Shock-Safe Fuseholder, 6 x 30mm ,



图片

250VAC 10A

## Description

- Quick-conntect or solder terminals

## References

### Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store,

## Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

## Approvals


' UL File Number: E239034

## Technical Data


| | | | |
|---|---|---|---|
| Shocksafe Category | PC2 | Soldering Methods | Iron |
| Fuse-Link | 6 x 30mm | Solderability | 350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2 |
| Mounting | Panel Mount, Front-Side | | |
| Mounting | Fixing Nut | Resistance to Soldering Heat | 350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2 |
| Terminal | Solder or Quick-Connect 4.8 x 0.5 mm | | |
| Rated Voltage | 250VAC | Contact Resistance | < 5mΩ at 20 mV |
| Rated Current | 10A (UL) | Dielectric Strength | > 3kV between L-N<br>> 4kV between L/N-PE<br>(50Hz; 1 min) |
| Degree of Protection | IP 40(A) IP67(B) | | |
| Protection Class | Suitable for appliances with protection class 1 or 2 acc. to IEC 61140 | Impulse Withstand Voltage | > 4kV between L-N<br>> 6kV between L/N-PE |
| Admissible Ambient Air Tem | -40℃to85℃ | | |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 | Insulation Resistance | > 10MΩ between L-N<br>> 100MΩ between L/N-PE<br>(500VDC; 1 min) |
| Material: Socket | thermosetting, black, UL 94V-0 | | |
| Material: Terminals | Tin-Plated Copper Alloy | | |
| Unit Weight (Socket/Cap) | 7.6 g / 3.8 g | Overvoltage Category | I - III acc. to IEC 60664-1 |
| Storage Conditions | 0℃ to 60℃, max. 70% r.h. | Pollution Degree | 1 - 3 acc. to IEC 60664-1 |
| Product Marking | Type, Voltage, Current, Approvals | Admissible Torque on Fixin Nut | max 1.2Nm |
| | | Panel Thickness s | max 7mm |

Hinew Electric Co., Ltd.

**Abmessungen**

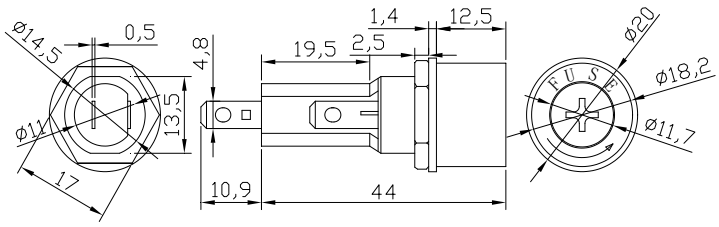


**Mounting holes**




| **Optional accessories** | | **Description** |
|---|---|---|
| 22TG |  | Screw-on head cap fits |
| 11DP |  | spacer white(optional) |
| 22LM |  | metal nut(optional) |