Hinew Electric Co., Ltd.

Fuseholder H3-52A/B/D

Shock-Safe Fuseholder, 6 x 30mm ,



H3-52A



H3-52B(CFH052)



H3-52D

250VAC 20A

## Description

- Quick-conntect or solder terminals

## References

### Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store

## Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

## Approvals


' UL File Number: E239034

## Technical Data


| | | | |
|---|---|---|---|
| Shocksafe Category | PC2 | Soldering Methods | Quick connector Solder |
| Fuse-Link | 6 x 30mm | Solderability | 350℃ / 2sec acc. to IEC 60068-2-20, Test Ta, method 2 |
| Mounting | Panel Mount, Front-Side | | |
| Mounting | Fixing Nut | Resistance to Soldering Heat | 350℃ / 10sec acc. to IEC 60068-2-20, Test Tb, method 2 |
| Terminal | Solder or Quick-Connect 4.8x0.5mm 6.3x0.8mm | | |
| Rated Voltage | 250VAC | Contact Resistance | < 5mΩ at 20 mV |
| Rated Current | 10A (UL) | Dielectric Strength | > 3kV between L-N |
| Degree of Protection | IP 40(A) IP67(B) | | > 4kV between L/N-PE |
| Protection Class | Suitable for appliances with protection class 1 or 2 acc. to IEC 61140 | | (50Hz; 1 min) |
| | | Impulse Withstand Voltage | > 4kV between L-N |
| Admissible Ambient Air Tem | -40℃to85℃ | | > 6kV between L/N-PE |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 | Insulation Resistance | > 10MΩ between L-N |
| Material: Socket | thermosetting, black, UL 94V-0 | | > 100MΩ between L/N-PE |
| Material: Terminals | Tin-Plated Copper Alloy | | (500VDC; 1 min) |
| Unit Weight (Socket/Cap) | 14 g / 3.26 g | Overvoltage Category | I - III acc. to IEC 60664-1 |
| Storage Conditions | 0℃ to 60℃, max. 70% r.h. | Pollution Degree | 1 - 3 acc. to IEC 60664-1 |
| Product Marking | Type, Voltage, Current, Approvals | Admissible Torque on Fixing Nut | max 1.2Nm |
| | | Panel Thickness s | max 7mm |

Hinew Electric Co., Ltd.


**Abmessungen**

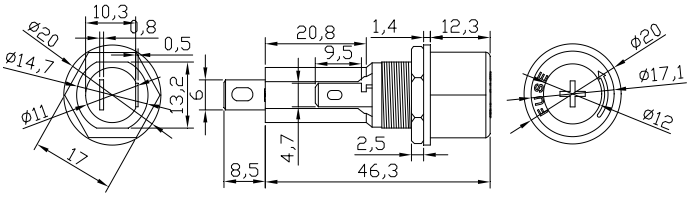


H3-52A

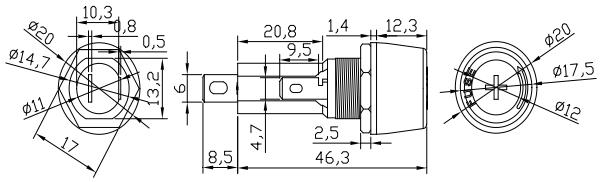



H3-52B

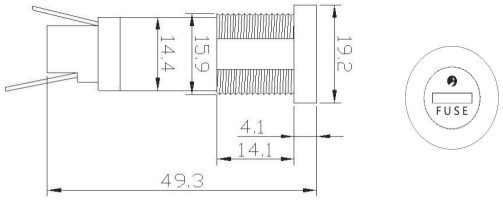



H3-52D

Mounting holes




H3-52A/B




H3-52D

| Optional accessories | | Description |
|---|---|---|
| 52DP |  | spacer white(optional) |
| 52TG |  | Screw-in head cover |
| 52XLM |  | metal nut(optional) |
| 52SLM |  | Plastic nut(optional) |