ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT Is CONSIDERED CONFIDENTIAL AND PROPRIETARY BY HINEW ELECTRIC APPLIANCE CO.,LTD. ALL DESIGN MANUFACTURING. USE. REPRODUCTION.AND ALL SALES RIGHTS. ARE EXPRESSLY RESERVED BY AND TO HINEW ELECTRIC APPLIANCE CO.,LID. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

| DRANING REVISIONS | | | | |
|---|---|---|---|---|
| REV | S/N | OESCRIPTION | APPROVED | DATE |
| B | | | | |

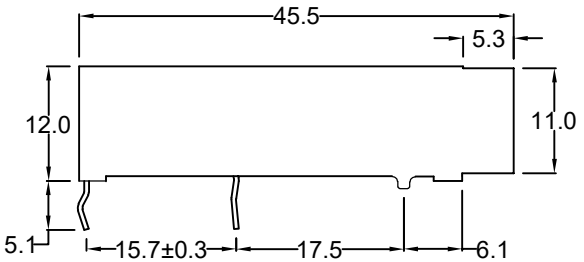










NOTES: UNLESS OTHERWISE SPECIFIED

1. Electrical Rating: 250V16A FUSE:6X30
2. Insulation Resistance At 500vdc: Min100MΩ
3. Dielectric Strength: Min AC 2000V
4. Insulating Boby: PBT
5. Contacts: Brass plated tin
6. Compliance with ROSH standard
7. Flame retardant grade:UL 94V0
9. Temperature tolerance grade:—30°C—125°C

| HINEW ELECTRIC CO.,LTD | | | | | |
|---|---|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERENCE DECIMALS ANGULAR x±0.5 ±2° xx±0.25 DO NOT SCALE DRAWING | NAME | FUSEHOLDER | DATA | |
| | | | REVIEW | |
| | MODEL | H3-60-2 | | |
| | DRAWING | HUANG | UNIT | mm |
| File NO. 1803062 | | NO | | |