Hinew Electric Co., Ltd.

Fuseholder H3-66A/B(H3)

Shock-Safe Fuseholder, 5 x 20 ,



H3-66A



H3-66B

250VAC 2.5W/10A

Description

- Quick-conntect or solder terminals

References

Weblinks

pdf, General Product Information, Approvals, RoHS, CHINA-RoHS, e Store,

Standards

IEC60127-6
UL4248-1/UL512
GB9364.6

Approvals

- VDE Certificate Number: 134125
' UL File Number: E239034


Technical Data

Fuse-Link	5x20mm
Mounting	PCB mount
Attachment	Screw, rivet or THT
Terminal	Solder THT
Rated Voltage	250VAC (VDE), 500V (UL)
Rated current	10A (VDE), 10A (UL)
Rated Power Acceptance IEC	4W / 10A @ Ta 23°C
	2.5 W / 10 A with transparant cover, see derating curves
Degree of Protection	IP 20 (with cover)
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40° C to 85° C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	see variants
Material: Cover/cap	Thermoplastic,black/transparent, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (Socket/Cap)	1.37g/0.68g
Storage Conditions	0° C to 60° C, max. 70% r.h
Product Marking	Type, Rated Voltage, Rated current,

Soldering Methods	wave soldering
Solderability	245° C / 3sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260° C / 10sec acc. to IEC 60068-2-20 Test Tb, method 1
Contact Resistance	≤ 10mΩ at 20 mV acc. to IEC 60127-6
Dielectric Strength	> 3kV between Life parts(50Hz; 1 min)
Impulse Withstand Voltage	> 4kV between Life parts
Insulation Resistance	≥ 10MΩ (500VDC; 1 min)
Overvoltage Category	III acc. to IEC 60664-1
Pollution Degree	3 acc. to IEC 60664-1
PCB board thickness	max3.5mm

Hinew Electric Co., Ltd.

Abmessungen

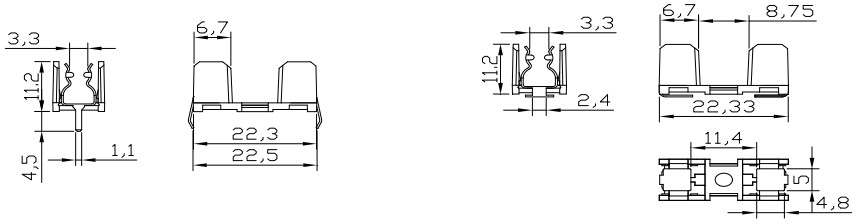

H3-66A


Mounting holes




H3-66A H3-66B

Derating Curves


without cover with cover

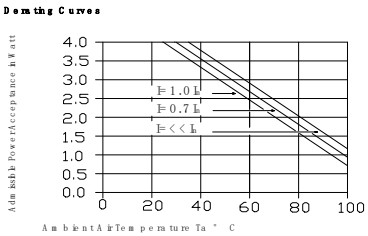



Required Accessory Description

66GI



Transparent cover (optional)