www.ledespecial.com

Energia solar led S. L
calle Rio Tormes 13 Fuenlabrada 28947 Madrid Spain
Email: energiasolarled2008@gmail.com
0034 916426626

Model: **ESL-ALTH0750A-5W**

Deep Anti-Glare COB Recessed Spotlight

Small aperture anti-glare design, high light efficiency, for residential & commercial lighting

Design Concept

As a model of basic lighting, it is often favored by people for its simple but not simple shape in the field of lighting application. Famous and excellent lighting, IQ0740A series products are suitable in size and excellent in light efficiency. They are the first choice for home and business.

Range of application

Hotels, supermarkets, office space, home lighting, commercial chains, etc








white | black
Color Optional

Basic parameter


Warranty	5 years
Wattage	5W
Size	ϕ40×55mm
Cutout	ϕ35
Installation	Embedded
IPgrade	IP20
Beam Angle	15°/24°/38°/60°
Main Material	Aluminum
Finished Color	Sand White+ Black
Working Temperature	-10°C~40°C
Product Standards	IEC(or EN)60598-1
Certification	CB/CE/ERP


Dimensions (mm)



LED parameter

LED Brand&Type	OSRAM COB
CRI	≥90
CCT	3000K	4000K	5000K
Light Efficiency	70-80Lm/W
LED chip numbers	/ pcs
Lumen	3000K: 332m	4000K: 353Lm	5000K: 362Lm





Packaging parameter

Quatity	100pcs/ctn
N.W.	15 kg/ctn
G.W.	15.7 kg/ctn
Inner Box	L75×W50×H90mm
Outer Box	L40×W27.5×H38.5cm
Volume	0.04235m³/ctn
Weight	150kg/pcs
Weight	107kg/pcs

Tips: Color temperature, lumen, beam angle and power all have errors of ±10%, which belongs to the normal range.

Energia solar led S. L
calle Rio Tormes 13 Fuenlabrada 28947 Madrid Spain
Email: energiasolarled2008@gmail.com
0034 916426626

www.ledespecial.com

Model: **ESL-ALTH0750A-9W**

Deep Anti-Glare COB Recessed Spotlight

Small aperture anti-glare design, high light efficiency, for residential & commercial lighting

Design Concept

As a model of basic lighting, it is often favored by people for its simple but not simple shape in the field of lighting application. Famous and excellent lighting, IQ0740A series products are suitable in size and excellent in light efficiency. They are the first choice for home and business.

Range of application

Hotels, supermarkets, office space, home lighting, commercial chains, etc




white | black
Color Optional

Basic parameter


Warranty	5 years
Wattage	9W
Size	ϕ60×82mm
Cutout	ϕ55
Installation	Embedded
IPgrade	IP20
Beam Angle	15°/24°/38°/60°
Main Material	Aluminum
Finished Color	Sand White+ Black
Working Temperature	-10°C~40°C
Product Standards	IEC(or EN)60598-1
Certification	CB/CE/ERP


Dimensions (mm)



LED parameter

LED Brand&Type	OSRAM COB
CRI	≥90
CCT	3000K	4000K	5000K
Light Efficiency	85-95Lm/W
LED chip numbers	/ pcs
Lumen	3000K: 829m	4000K: 858Lm	5000K: 875Lm





Packaging parameter

Quatity	50pcs/ctn
N.W.	14 kg/ctn
G.W.	14.9 kg/ctn
Inner Box	L110×W110×H75mm
Outer Box	L57×W24×H40cm
Volume	0.05472m³/ctn
Weight	280kg/pcs
Weight	225kg/pcs

Tips: Color temperature, lumen, beam angle and power all have errors of ±10%, which belongs to the normal range.

www.ledespecial.com

Energia solar led S. L
calle Rio Tormes 13 Fuenlabrada 28947 Madrid Spain
Email: energiasolarled2008@gmail.com
0034 916426626

Model: **ESL-ALTH0750A-XXW**

Deep Anti-Glare COB Recessed Spotlight

Small aperture anti-glare design, high light efficiency, for residential & commercial lighting

Design Concept

01 Drive parameter

Driver	No Dimming, flicker-free
Input	DC 48V
Output	/
Typical Efficiency	/
Certificate	/

02 Drive parameter

Driver	0-10V Dimming, flicker-free
Input	DC 48V
Output	/
Typical Efficiency	/
Certificate	/

03 Drive parameter


Driver	Triac Dimming, flicker-free
Input	DC 48V
Output	/
Typical Efficiency	/
Certificate	/


04 Drive parameter


Driver	DALI Dimming , flicker-free
Input	DC 48V
Output	/
Typical Efficiency	/
Certificate	/


05 Drive parameter

Driver	Zigbee Dimming , flicker-free
Input	DC 48V
Output	/
Typical Efficiency	/
Certificate	/

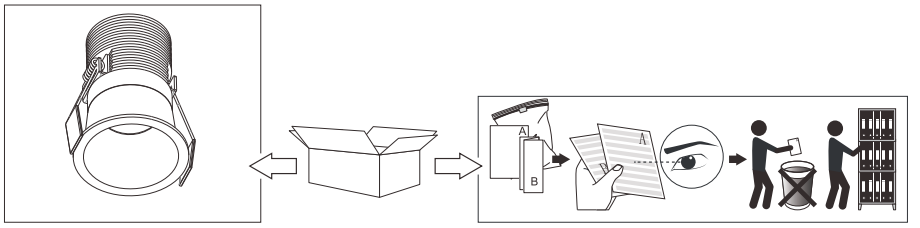

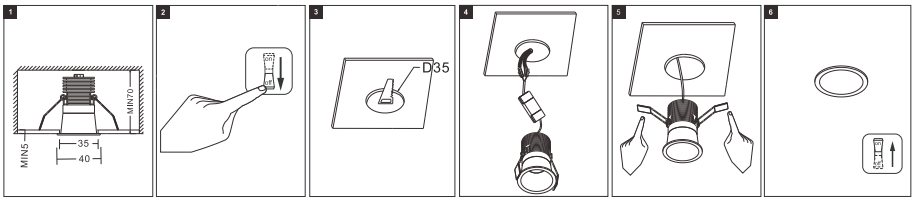

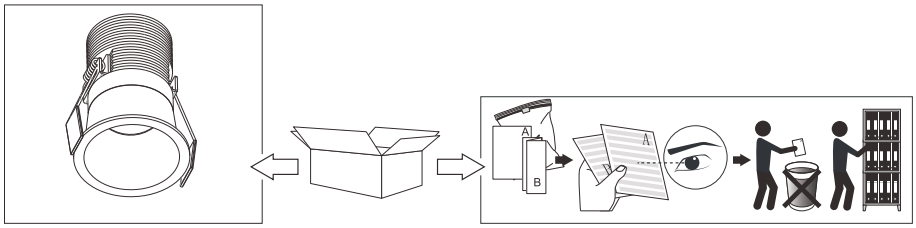

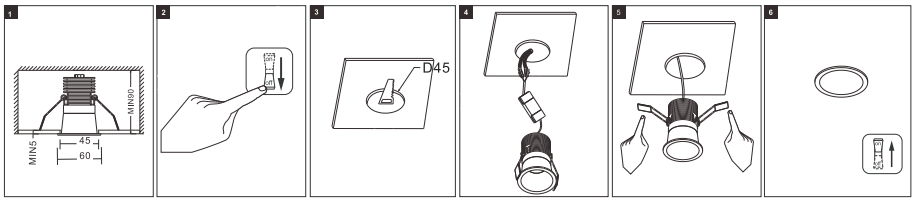

Tips: Color temperature, lumen, beam angle and power all have errors of ±10%, which belongs to the normal range.