

GKX160E

ELECTRIC SELF-PROPELLED SCISSOR LIFT

SINOMACH

DIMENSION

A Max. Platform Height	13.7m
Min. platform height	1.45m
Max. Working Height	15.7m
B Max. Outreach	0.9m
C Overall Length	2.84m
D Overall Width	1.25m
Overall Height (guardrails folded)	2.08m
E Overall Height (guardrails unfolded)	2.68m
F Wheelbase	2.21m
Ground Clearance-Pothole protection board ground Clearance(up)	0.15m
Ground clearance-Pothole protection board ground Clearance(down)	0.019m
Platform Size(LxWx H)	2.64m*1.12m*1.1m
Length -Platform Extended	3.54m
Overall Length -Platform Extended	3.75m
Skirting Board Height	0.15m

PERFORMANCE



Lifting Capacity	250kg
Lifting Capacity (extended platform)	113kg
Max. Load number (Indoor /Outdoor)	2/0
Drive Speed (Stowed)	3.2km/h
Drive Speed (Raised)	0.7km/h
Rising Time	70s
Lowering Time	45s
Gradeability (2wD)	25%
Tilt Sensor-Front to Back/ Side to Side	3°/1.5°
Turing Radius-inside/ outside	0m/2.75m
Max. Lateral Force (indoor/outdoor)	400N/0
Max. Wind Speed	0
Tire Specification Type	381*127mm Solid Tires

POWER

Drive mode	Hydraulic/ Electric Drive, 2WDx2WS
Power Unit Motor (voltage/power)	24V/3.3kW
Hydraulic Tank Capacity	23L
Hydraulic system pressure	21Mpa
Battery specifications (lead-acid battery/lithium battery)	235Ah
System Voltage	24V
Control Voltage	24V
Charger (Input Voltage/Output Current)	96-265V/30A

WEIGHT

Weight -ANSI/CSA Standard	/
Weight - CE/AUS Standard	3345kg
Standard	GB/CE

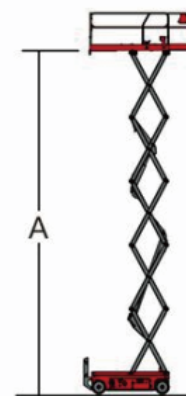

国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add: No. 898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC: 213136

Tel: 86-519-86781288 86752400

Fax: 86-519-86781387

Http://www.sinomachhiglobal.com

E-mail: global@changlin.com.cn service@changlin.com.cn

