

- **FOLDING GUARDRAIL FOR CONVENIENT TRANSPORTATION**
- **DOUBLE DOOR DESIGN, CONVENIENT MAINTENANCE**

DIMENSION

A Max. Platform HeightMax.	8m
Working Height	10m
B Max. Outreach	1m
C Overall Length	2.48m
D Overall Width	0.81m
Overall Height (guardrails folded)	1.82m
E Overall Height (guardrails unfolded)	2.37m
F Wheelbase	1.85m
Ground Clearance	0.1m
Pothole protection board ground Clearance(down)	0.024m
Platform Size(LxWxH)	2.25m*0.8m*1.25m
Length -Platform Extended	3.25m
Skirting Board Height	0.15m

PERFORMANCE




Lifting Capacity	230kg
Lifting Capacity (extended platform)	120kg
Max. Load number (indoor/outdoor)	2pers/1per
Drive Speed (Stowed)	3.2km/h
Drive Speed (Raised)	0.7km/h
Rising Time (empty load)	35s
Lowering Time (empty load)	17s
Gradeability (2wD)	25%
Tilt Sensor - Front to Back/ Side to Side	3°/1.5°
Turing Radius -inside/ outside	0/2.18m
Max.Lateral Force (indoor/ outdoor)	400N/200N
Max. Wind Speed	12.5m/s
Tire Specification/ Type	381*127mm Solid Tires

POWER

Drive Mode	Hydraulic/ Electric Drive, 2WDx2WS
Power Unit Motor (voltage/power)	24V/3.3kW
Hydraulic Tank Capacity	8L
Hydraulic system pressure	21Mpa
Battery specifications (lead-acid battery/lithium battery)	235Ah
System Voltage	24V
Control Voltage	24V
Charger (input Voltage/Output Current)	90-264V/30A

WEIGHT

Weight	1542kg
Standard	GB/CE

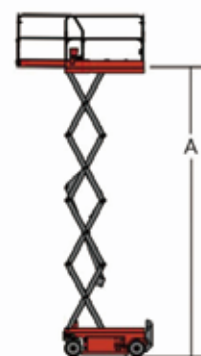

国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC:213136

Tel:86-519-86781288 86752400

Fax:86-519-86781387

Http://www.sinomachhiglobal.com

E-mail:global@changlin.com.cn service@changlin.com.cn

